

-OWNER'S MANUAL-

Every customer purchasing a Candock product from Candock Inc. or one of its authorized representatives and distributors should activate the Manufacturer's warranty via Candock's online warranty activation system.

Online warranty activation: <http://candock.com/about-us/support-and-warranty/register-product/>

Créer le	2020-11-30	Approbation	
Fichier	Owners manual	Révision	02

Ⓞ BASIC PRODUCTS 5

HOW CANDOCK WORKS.....	5
LAYERS AND TABS.....	6
CUBES (REGULAR AND LOW PROFILE).....	7
EDGE CUBES (REGULAR AND CORNER).....	9
CORNER CUBE.....	11
CANDOCK SERVICE CHANNEL.....	13
SERVICE CUBE BASE.....	14
COVER OPTIONS.....	14
CONNECTING PIN.....	17
SLIDING NUT.....	18
BOLT FOR CUBE.....	19
NUT.....	20
SPACER.....	20

Ⓞ DOCK ACCESSORIES..... 21

BUMPER.....	21
VERTICAL BUMPER.....	22
CLEAT.....	23
FLUSH CLEAT ON CONNECTING PIN.....	24
H.D. BOLLARD CLEAT.....	25
MODULAR RAILING SYSTEM.....	26
HANDRAIL POSTS AND RAILINGS (SURFACE AND PERIPHERAL).....	27
LED LIGHT SYSTEM.....	30
LED LIGHTS - CONTROL UNITS - COVERS.....	31
OUTBOARD ENGINE MOUNT.....	34
SWIM LADDER.....	35
BENCH.....	36
REVOLVING AND FOLDING SEAT.....	37
STORAGE CUBE.....	38
MOORING WHIPS SUPPORT.....	39
MODULAR KAYAK RACKS (SINGLE AND DOUBLE).....	40
KAYAK LAUNCH BAR WITH PIN.....	41
DOUBLE LAYER ROD KIT.....	43
SOLAR SERIES.....	44
PATH LIGHT.....	45
POST LIGHT ON CONNECTING PIN.....	46
MAST LIGHT ON POST CUBE.....	47
MARINE LIGHT WITH 7FT POLE.....	49

Ⓞ ANCHORING PRODUCTS 50

PILINGS INTRODUCTION	50
POST CUBE + 2 7/8" X 0.120 GALVANIZED STEEL PILE + 3" PVC SLEEVE AND CAP	51
1 11/16" X 0.10 GALVANIZED STEEL PILE AND CAP	55
ADJUSTABLE PILE SUPPORT 2-7/8" - GALVANIZED	56
HDPE PILE GUIDE FOR 2 7/8" STEEL PILE	57
"Z" BRACKET FOR 2 7/8" STEEL PILE (16" AND 6")	58
PILE SUPPORT FOR 1 11/16" STEEL PILE	59
OTHER PILING ATTACHMENT OPTIONS.....	61
ADJUSTABLE PILE GUIDE FOR EXISTING PILES OF 15cm TO 38cm O/D (6" TO 15")	61
PILE GLIDE ADAPTOR (CAROLINA WATERWORKS - ALUMINUM OR GALVANIZED STEEL).....	63
ADJUSTABLE INTERNAL SQUARE PILE GUIDE WITH ROLLERS - SS 316.....	64
UNDERWATER ANCHORING POINTS WITH ANCHOR LINES INTRODUCTION.....	66
ANCHOR PLATE FOR CHAIN	68
CONNECTING PIN WITH PIVOTING ANCHOR PLATE FOR CHAIN	69
CONNECTING PIN WITH ANCHOR RING FOR CHAIN (CONCRETE FILLED).....	70
"HOT DIPPED" GALVANIZED STEEL CHAINS	71
SHACKLES.....	71
ELASTIC ANCHORING CABLES (TMS).....	72
MISCELLANEOUS ANCHORING TECHNIQUES	74
WALL ANCHORS AND EXTENSION PLATE FOR WALL ANCHORS.....	74
SWIVEL ANCHOR CHANNEL FOR JETROLL.....	76
⊙ V-ROLL DRYDOCK SYSTEM.....	79
BASIC CONCEPTS OF THE V-ROLL SYSTEM	79
USING A WATERCRAFT WITH THE V-ROLL.....	83
STIFFENING BEAM.....	84
GUIDELINES FOR V-ROLL SYSTEM CONFIGURATION (FOR BOATS)	85
WEIGHTS AND DIMENSIONS - CONFIGURATION CHART	86
AIRLIFT 6500 SYSTEM	91
⊙ JETSLIDE DRY-DOCK SYSTEM.....	94
JETSLIDE SYSTEM BASIC CONCEPTS	94
JETSLIDE	95
OPERATING A WATER-CRAFT WITH THE JETSLIDE.....	97
STIFFENING BEAMS	98
"V" PLATE	99
EXTENSION PLATES (1, 2, AND 3 CUBES) AND BOLTS FOR JETSLIDE	100
.....	100
JETSLIDE BOAT WINCHES	101
JETSLIDE PWC WINCH.....	103
CONNECTING PIN WITH LOCK CHAIN.....	104
PWC JETSLIDE SYSTEM CONFIGURATION GUIDELINES.....	105
PWC JETSLIDE SYSTEM ANCHORING GUIDELINES	106


BOAT JETSLIDE SYSTEM CONFIGURATION GUIDELINES	108
DRIVE-ON SYSTEM FOR SEADOO SWITCH	109
⊙ JETROLL DRY-DOCK SYSTEM.....	111
JETROLL SYSTEM BASIC CONCEPTS	111
JETROLL (BOW-STOP, HOLE CAPS, AND WHEELS).....	112
LINK-KITS	115
CONNECTING PINS LONG TYPE	118
PWC JETROLL SYSTEM CONFIGURATION GUIDELINES.....	119
PWC JETROLL SYSTEM ANCHORING GUIDELINES.....	120
⊙ GANGWAYS	121
GANGWAYS BASIC CONCEPTS AND CONFIGURATION GUIDELINES	121
WELDED GANGWAYS	122
GANGWAY SPECIFICATION CHART	122
RAILINGS FOR WELDED GANGWAYS	123
DEPARTURE ANGLES FOR WELDED GANGWAYS.....	124
MODULAR HINGED LINK KITS	125
SLIDERS FOR WELDED GANGWAYS	126
BOLT-ON ROLLER FOR WELDED GANGWAYS	127
LANDING WHEEL KITS	128
GANGWAY RECEPTION PLATES	129
TRANSIT PLATES FOR WELDED GANGWAYS.....	130
MODULAR GANGWAYS.....	131
GANGWAY SPECIFICATION CHART	131
RAILINGS FOR MODULAR GANGWAYS	132
DEPARTURE ANGLE FOR MODULAR GANGWAYS	133
HINGED LINK KITS FOR MODULAR GANGWAYS.....	134
SHORE-END PILE BRACKETS FOR MODULAR GANGWAYS.....	135
CANDOCK HINGES FOR MODULAR GANGWAYS	136
SLIDERS (FOR WELDED AND MODULAR FRAMES).....	137
TRANSIT PLATES FOR MODULAR GANGWAYS	138
DECKINGS	139
⊙ TOOLS.....	140
KEY FOR CONNECTING PINS.....	140
KEY FOR NUTS.....	140
PILING DRIVER, PILING BULL AND PILING LEVER	141
TOOLS FOR CANDOCK MODULAR RAILINGS.....	142

◎ BASIC PRODUCTS

HOW CANDOCK WORKS

Before starting, here are some basic principles about the Candock Modular floating system that apply throughout the instruction manual. Our system relies on a simple yet proven coupling system to attach all its components.

Candock parts are secured together using a "Nut and Bolt/Screw" system. Depending on the specifications, geometries, application, and options required for your project, the below principles and concepts apply in different forms. The coupling hardware may vary depending on the location of the assembly point. Usually, the CONNECTING PIN and SLIDING NUT are used for coupling modules on the interior of the system. On the other hand, the BOLT FOR CUBE and NUT are used for coupling modules on the outskirts of the system.

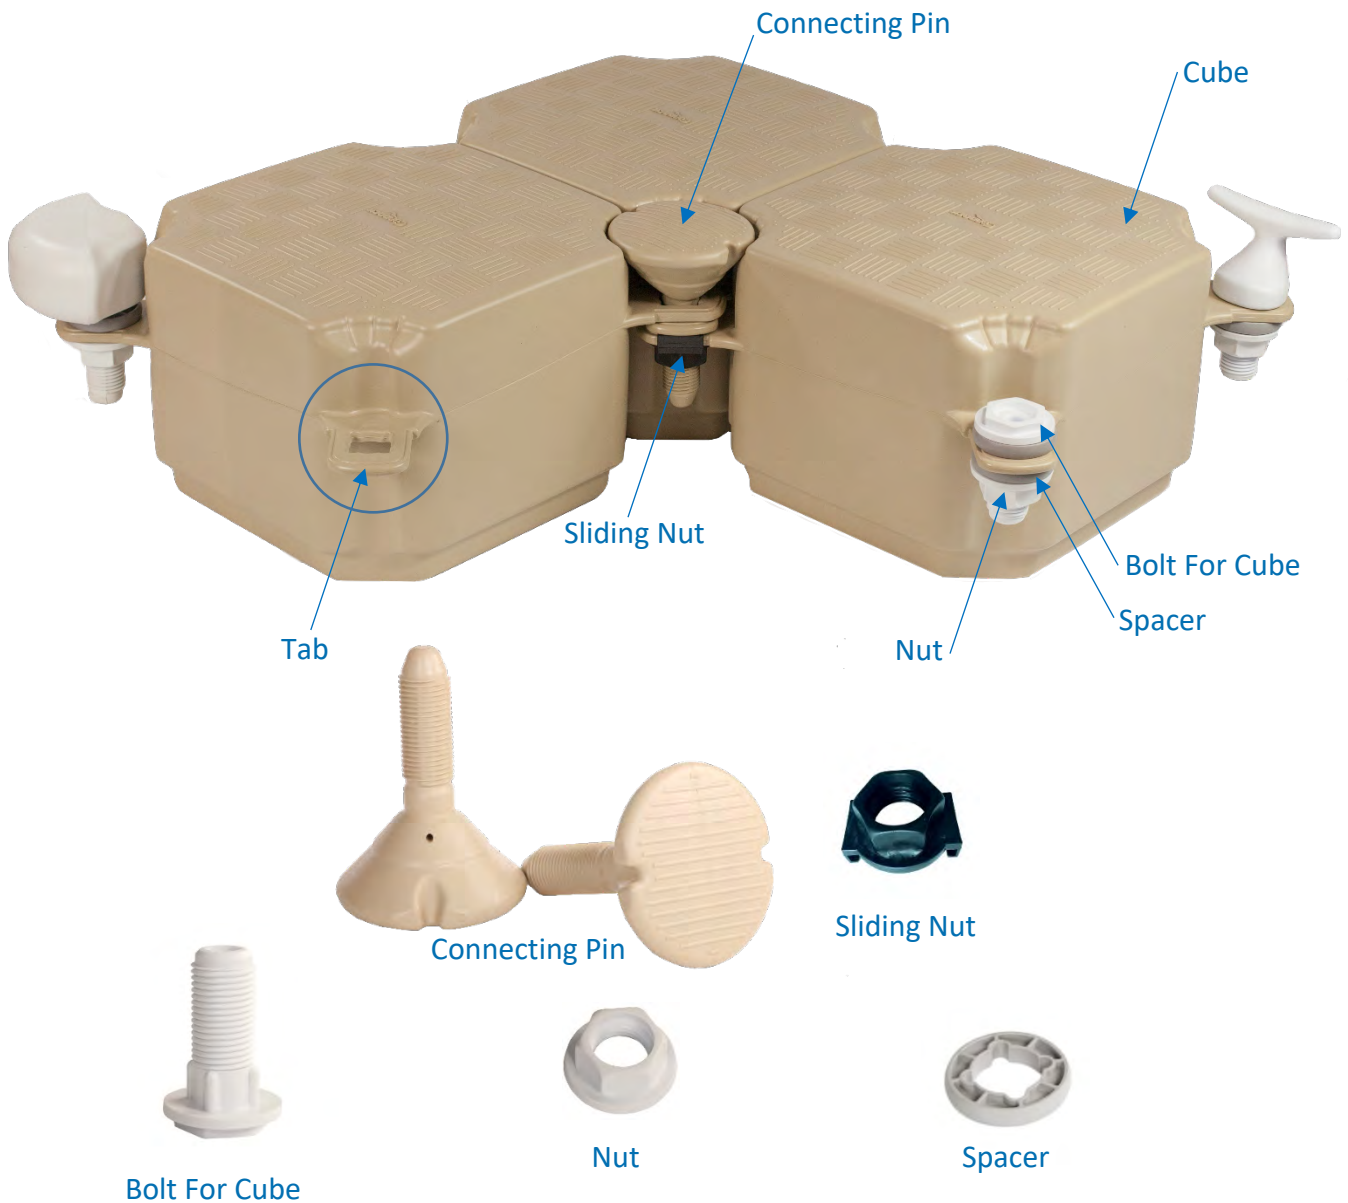


LAYERS AND TABS

The "Nut and Bolt/Screw" coupling system requires every tab to be coupled at a designated coupling point and must be overlapped adequately for the system to work. The images and diagrams below demonstrate which "layer" each tab of our different modules is using.

The lowest tab available in a designated assembly point holds the SLIDING NUT. The additional tabs of the cubes will be positioned in superimposed layers. If a gap (missing tab) is present as you overlap the tabs, the void is filled by a SPACER until you have reached the highest available tab in your assembly.

In the below image, layers #2, #3, and #4 are occupied by tabs 2, 3, and 4. On the lowest tab available in the assembly*, a SLIDING NUT is inserted on the tab to allow for the CONNECTING PIN's "male" threads to have traction in the "female" threads of the SLIDING NUT.

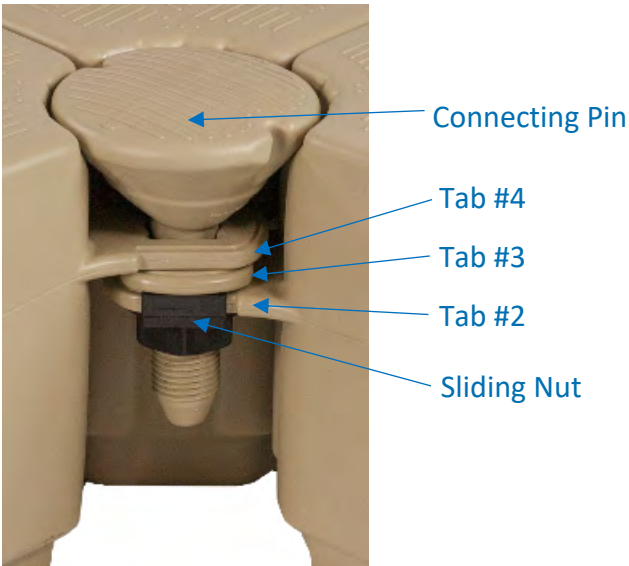

*Layer 1 (tab #1) is missing in the featured assembly to allow for the assembly's good viewpoint.

TAB POSITIONS

The basic components of the Candock system are using eight (8) different layers (tabs). Starting from the lowest tab, the sequence is as follows: -1, 0, 1, 2, 3, 4, 5, and 6. The regular CUBE uses tabs #1, #2, #3 and #4. The other components (CORNER CUBE and EDGE CUBES) are using tabs #-1, #0, #5, and #6. Throughout our manual, we use the below diagram to explain which layers (tabs) is utilized for each system/product.




Diagram demonstrating which tabs are used.

In this case, the featured product/module utilizes tabs #1, #2, #3 and #4.


CUBES (REGULAR AND LOW PROFILE)



Regular



Low-profile

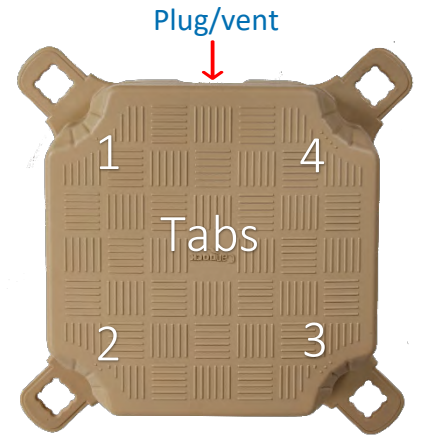


USEFUL LINKS AND RESOURCES:

[YouTube](#)

[Website](#)

TAB POSITIONS



SPECIFICATIONS

Material/Composition: High-density polyethylene resin

Available colors: Beige, Grey

Surface: Anti-skid

Dimensions: L x W: 48 cm (19") x 48 cm (19") H: 36 cm (14")

Dimensions (low profile cube): L x W: 48 cm (19") x 48 cm (19") H: 23 cm (9")

Maximal Floating capacity Regular cube: 68 kg (150 lbs.) per cube

Maximal Floating capacity – Regular cube - per square meter (sq. ft): 272 kg per sq. m. (60 lbs. per sq. ft.)

Maximal Floating capacity Low profile cube: 50 kg (110 lbs.) per cube

Maximal Floating capacity – Low profile cube - per square meter (sq. ft): 210 kg per sq. m. (44 lbs. per sq. ft.)

Suggested working load – Regular cube - per square meter (sq. ft): 90 kg per sq. m. (20 lbs. per sq. ft.)

Weight: Cube: 5.5 kg (12 lbs.) / Low profile cube: 5 kg (11 lbs.)

Needed tools: G2 key for pin, Key for nut

SKU NUMBERS

G2 CUBE BEIGE: C01-000002

G2 CUBE GREY: C01-000001

LOW PROFILE G2 CUBE BEIGE: C01-000007

LOW PROFILE G2 CUBE GREY: C01-000008

TERMINOLOGY

TABS: Prominent grooved parts of the cube, located at different heights on each of the four (4) corners of the "cube" (tab #1 to #4, #1 being the lowest and #4, the highest). These tabs are an integral part of the Candock system. When assemble in groups of 4, the cubes create a larger square. At the center of this square, four (4) different tabs overlap each other. These tabs form a single opening and are meant to be coupled with our SLIDING NUT and CONNECTING PIN to form a unique structure.

PLUGS: These watertight plugs are always found on the cube side between tab # 1 and # 4. These plugs, made of breathable material, act as pressure release valves preventing any cube deformation due to temperature changes and pressure variations. Furthermore, these plugs prevent any condensation inside the cube.

NOTE: Fully sealed plugs (no pressure release valve) are also available if the cubes should be submerged for extended periods.

ASSEMBLY PROCEDURE

PRIOR TO INSTALLATION

1-During the installation of a dock, always have the plugs oriented towards the shore. This orientation uses fewer SPACERS and improves the aesthetic of your dock. If your configuration is meant to go along the shoreline instead of offshore (parallel to shore instead of perpendicular), align plugs towards the shortest side of your dock.

2-Always make sure to regroup four (4) different tab heights to complete your assembly. Make sure they are in their pre-destined position and that none of these are wrongfully overlapping each other.

3-Preassemble the dock in larger sections directly on the ground. Before putting the dock in the water, prepare the missing units of CONNECTING PINS and SLIDING NUTS and position them on each section's corresponding side. This step helps you save time.

PROCEDURE:


- 1- Prepare all items and have them unboxed close to your "assembly" area (cubes, connecting pins, sliding nuts, spacers, and tools)
- 2- Insert a SLIDING NUT on the lowest tab available at each connecting point.
- 3- Position the sections next to each other and ensure that the tabs are overlapping correctly. Fill in any empty layers in-between the tabs with SPACERS
- 4- Insert the CONNECTING PINS in the tabs as you progress and manually engage the threads.
- 5-Once the sequence of cubes is connected, complete assembly by firmly tightening the CONNECTIN PINS.
- 6- Add BOLT FOR CUBE and NUT assemblies on the entire perimeter of your dock. If necessary, do not forget to fill the empty layers in-between the tabs with SPACERS.

TRICKS AND TIPS: THE SCISSOR TECHNIQUE

While assembling bigger sections on the water, proceed with the following steps:

- 1-Insert SLIDING NUTS at each coupling point.
- 2-Insert a CONNECTING PIN as shown on the diagram
- 3-Bring the two sections side by side while correctly overlapping each tab.
- 4- Insert CONNECTING PINS at each coupling point and tighten firmly.

This technique helps you assemble big sections with ease.

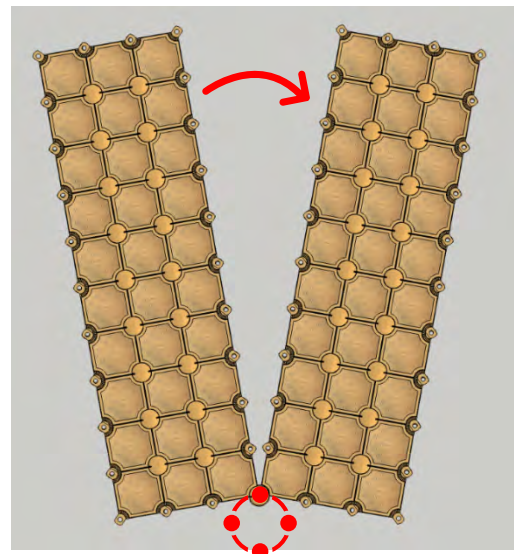

EDGE CUBES (REGULAR AND CORNER)

REGULAR



CORNER




USEFUL LINKS AND RESOURCES:

[Website](#)

[YouTube](#)

TAB POSITIONS



SPECIFICATIONS

Material/Composition: High-density polyethylene resin

Available colors: Beige and Grey

Surface: Anti-skid

Dimensions: Regular: L x W: 48 cm (19") x 24 cm (9^{1/2}") H: 23 cm (14")/ Corner: L x W: 24 cm (9^{1/2}") x 24 cm (9^{1/2}") H: 29 cm (11")

Floating capacity: Regular 30 kg (66 lbs.) per cube

Weight: Cube: 4 kg (9 lbs.)

Needed tools: G2 key for pin

SKU NUMBERS

EDGE CUBE BEIGE: C01-000013

EDGE CUBE GREY: C01-000014

CORNER EDGE CUBE BEIGE: C01-000015

CORNER EDGE CUBE GREY: C01-000016

TERMINOLOGY

EDGE CUBE: Still using our regular "nut and pin" system on tabs, which are now located at different heights on 2 of the corners of Candock's EDGE CUBE, are still an integral part of the Candock system. When added to our regular CUBES perimeter, the EDGE CUBES create a smoother and more aesthetic finish while eliminating any prominent pieces on the outskirts of your dock. The EDGE CUBE tabs are located at a lower position than the regular G2 cube's tabs (#1 to #4). Representing layers "negative 1" and "zero" (-1 being the lowest and -zero ("0") being just above), these always need to be positioned underneath the regular CUBE'S tabs.

CORNER EDGE CUBE: Again, using our regular "nut and pin" system on a single tab located on one corner of the CORNER EDGE CUBE. When added to our regular CUBES perimeter, the CORNER EDGE CUBE creates a smoother and more aesthetic finish on the outskirt corners of your dock while eliminating the prominent part sticking out of the structure (G2 cube tab). The CORNER EDGE CUBE tab is tab #5, which is the same one as the two (2) lower tabs of the CORNER CUBE.

ASSEMBLY PROCEDURE

IMPORTANT NOTIONS

- Any tab layer that presents no tab must be replaced by a SPACER, starting from the lowest tab available going upwards.
- A SLIDING NUT is required on the lowest tab available (either "0" or "-1").
- Make sure you work on dry land with a flat and uniform surface. Installing EDGE CUBES in the water is possible, but the task is more challenging and requires a minimum of 2 people to proceed.

SEQUENCE

- 1- Prepare all items and have them unboxed close to your "assembly" area (cubes, connecting pins, sliding nuts, spacers, and tools)
- 2- Insert a SLIDING NUT on the lowest tabs available at each connecting point.
- 3- Position the sections next to each other, alongside the regular G2 CUBES assembly, and ensure that the tabs are overlapping adequately.
- 4- Insert the CONNECTING PINS in the tabs as you progress and manually engage the threads.
- 5-Once the sequence of cubes is connected, complete assembly by firmly tightening the CONNECTIN PINS.



CORNER CUBE



TAB POSITIONS

#6
#5
#4
#3
#2
#1
#0
#-1

SPECIFICATIONS

Material/Composition: High-density polyethylene resin
Available colors: Beige and Grey
Surface: Anti-skid
Dimensions: L x W: 48 cm (19") x 48 cm (19") ÷ 2 H: 23 cm (9")
Weight: Cube: 4 kg (9 lbs.)
Needed tools: G2 key for pin, Key for nut

SKU NUMBERS

G2 CORNER CUBE BEIGE: C01-000011
G2 CORNER CUBE GREY: C01-000012

TERMINOLOGY

TABS: Prominent grooved parts of the cube located at two (2) different heights on each of the three (3) corners of the CORNER CUBE (tabs 5 and 6). Two of those tabs are identical, namely tab #5. The 3rd one, being slightly higher (tab #6), features a bigger and beveled opening to accommodate the CONNECTING PIN'S neck's conical shape. These tabs are also an integral part of the Candock assembly system. Utilizing layers 5 and 6, the CORNER CUBE can be installed anywhere around a Candock dock without interfering with the regular CUBES tabs (1, 2, 3, and 4).

ASSEMBLY PROCEDURE

IMPORTANT NOTIONS

-Any tab/layer that presents no tab must be replaced by a SPACER, starting from the lowest tab available, going upwards.

INTERIOR CORNER CONFIGURATION: SLIDING NUTS and CONNECTING PINS are required at each connecting point.

EXTERIOR CORNER CONFIGURATION: (1x) SLIDING NUT and (1x) CONNECTING PIN is required for the "inside connecting point. (2x) BOLT FOR CUBE and (2x) NUTS are required for the 2 "outside" connecting points.


SEQUENCE

- 1- Prepare all items and have them unboxed close to your "assembly" area (corner cubes, connecting pins, sliding nuts, bolts for cube, white nuts, spacers, and tools)
- 2- Insert a SLIDING NUT on the lowest tabs available at each connecting point.
- 3- Position the CONER CUBE alongside the regular G2 CUBES assembly and ensure that the tabs are overlapping adequately.
- 4- Insert the CONNECTING PINS in the "inside" openings as you progress and manually engage the threads.
- 5-Insert all needed SPACERS on the "outside" connecting points.
- 5- Insert the BOLT FOR CUBE on the "outside" tabs as you progress.
- 6-Manually engage the NUTS on the BOLT FOR CUBE as you progress.
- 7-Once the cubes' sequence is connected, complete assembly by firmly tightening the CONNECTIN PINS and BOLT FOR CUBE/NUTS assemblies.


CANDOCK SERVICE CHANNEL

Before starting, here are some basic principles about the Candock service channel system. The service channel system abides by the same assembly concepts as our regular floating dock system while allowing many advantages. Consisting of a "2-piece" cube (the SERVICE CUBE BASE and the SERVICE CUBE COVER), multiple units' assembly allows marina service channels, outlets (freshwater outlets and electrical services) and our unique LED light system to be seamlessly integrated into our modular floating dock system.

As is the case with our regular system, all Candock parts are secured together using a "Nut and Bolt/Screw" system. Depending on the specification, geometries, application, and options required for your project, the same principles explained earlier apply. The coupling hardware may vary depending on the location of the assembly point. The CONNECTING PIN and SLIDING NUT are used for coupling modules inside the System's perimeter. On the other hand, the BOLT FOR CUBE and NUT are used for coupling modules on the outskirts of the system.

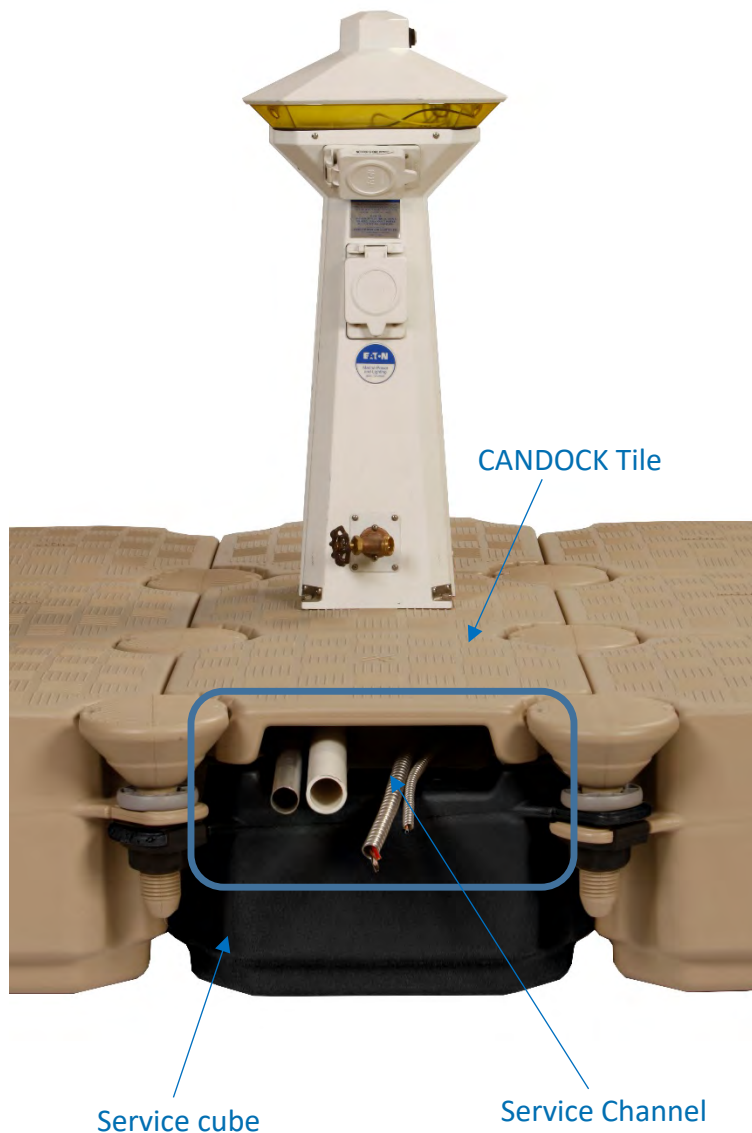

SERVICE CUBE BASE

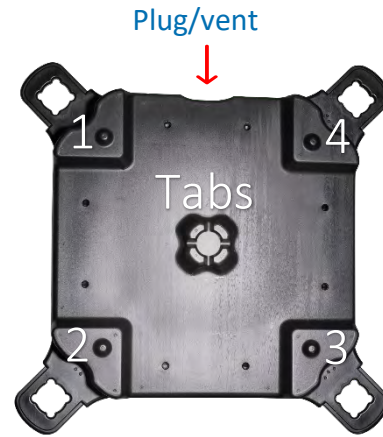

COVER OPTIONS



Tile, Grey or Beige

Tile LinQ, Grey or Beige



Translucent (used with
our LED light system)

USEFUL LINKS AND RESOURCES:

[Website](#)

TAB POSITIONS

	#6
	#5
	#4
	#3
	#2
	#1
	#0
	#-1

SPECIFICATIONS

Material/Composition: High-density polyethylene resin

Available color cube base: Black

Available colors cube cover: Beige, Grey, and translucent (**LED Light System**)

Surface: Anti-skid

Dimensions cube base: L x W: 48 cm (19") x 48 cm (19") H: 26.6 cm (10 ½")

Weight cube base: Cube: 5 kg (11 lbs.)

Dimensions cube cover: L x W: 48 cm (19") x 48 cm (19") H: 7.4 cm (2.9")

Weight cube cover: Cube: 1.65 kg (3.64lbs.)

Maximal conduits diameter: 45mm (1.75")

Needed tools: G2 key for pin, Key for nut.

SKU NUMBERS

G2 SERVICE CUBE BASE BLACK: C01-000003

REGULAR SERVICE COVER TILE BEIGE: C03-000016

REGULAR SERVICE COVER TILE GREY: C03-000017

REGULAR SERVICE COVER TRANSLUCENT: C01-000010

LINQ SERVICE COVER TILE BEIGE: C03-000018

LINQ SERVICE COVER TILE GREY: C03-000019

TERMINOLOGY

TABS: Prominent grooved parts of the cube, located at different heights on each of the four (4) corners of the "cube" (tab #1 to #4, #1 being the lowest and #4, the highest). These tabs are an integral part of the Candock system. When rallied in groups of 4, the cubes create a larger square. At the center of this square, four (4) different tabs overlap each other. These tabs form a single opening and are meant to be coupled with our SLIDING NUT and CONNECTING PIN to form a unique structure.

PLUGS: These watertight plugs are always found on the cube side between tab # 1 and # 4. These plugs, made of breathable material, act as pressure release valves preventing any cube deformation due to temperature or altitude. Furthermore, these plugs prevent any condensation inside the cube.

TILE COVER

The **TILE COVER** must be surrounded by other cubes (REGULAR CUBES, SERVICE CUBES, CORNER CUBES, OR EDGE CUBES) on all four (4) sides. The four (4) surrounding connecting pins, especially their "slanted necks," compress the cover onto the cube's base, making it a sturdy and robust assembly.

ASSEMBLY PROCEDURE

PRIOR TO INSTALLATION

1-During the installation of a dock, always have the plugs oriented towards the shore. This orientation uses fewer SPACERS and improves the aesthetic of your dock. If your configuration is meant to go along the shoreline instead of offshore (parallel to shore instead of perpendicular), align plugs towards the shortest side of your dock.

2-Always make sure to regroup four (4) different tab heights to complete your assembly. Make sure they are in their pre-destined position and that none of these are wrongfully overlapping each other.

3-Preassemble the dock in larger sections directly on the ground. When in the water, prepare the missing units of CONNECTING PINS and SLIDING NUTS and position them on each section's corresponding side. This step helps you save time.

NOTES:

-As the SERVICE CUBE is composed of 2 parts (base and cover), including the covers or not in your pre-assembly (i.e., "4-pack" of cubes) depends on the application, geometries, and the environment you are working in. Contact your local Distributor or Candock's head offices for more information and insight in this regard.

The below procedure, we include the covers on the cube bases in our assembly.

PROCEDURE:


- 1- Prepare all items and have them unboxed close to your "assembly" area (cube bases, cube covers, connecting pins, sliding nuts, spacers, and tools)
- 2- Insert a SLIDING NUT on the lowest tab available at each connecting point.
- 3- Position the sections next to each other and ensure that the tabs are overlapping correctly.
- 4- Position de TILE COVERS onto the cube's bases.
- 5- Insert the CONNECTING PINS in the tabs as you progress and manually engage the threads.
- 6- Once the sequence of cubes is connected, complete assembly by firmly tightening the CONNECTIN PINS.
- 7- Add BOLT FOR CUBE and NUT assemblies on the entire perimeter of your dock. If necessary, do not forget to fill the empty layers in-between the tabs with SPACERS.

SERVICES CONDUITS (WATER AND ELECTRICITY) – POWER PEDESTALS – LED LIGHT SYSTEM

The final step of routing electrical cables, water pipes, or our LED light system can be done at various stages of your assembly. Depending on the application, the geometries, and the environment you are working in, a working method will be determined. Contact your local Distributor or Candock's head offices for more information and insight in this regard.



CONNECTING PIN

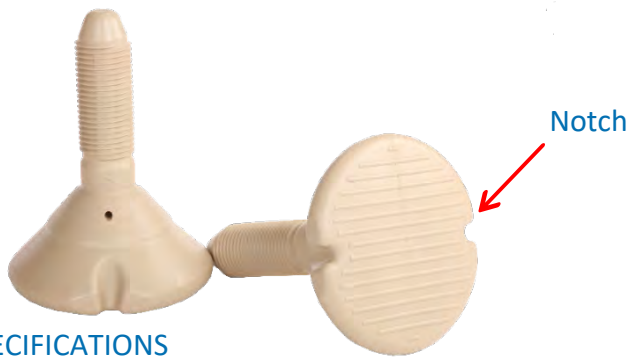

SPECIFICATIONS

Material/Composition: High-density polyethylene resin

Available colors: Beige, Grey

Surface: Anti-skid

Dimensions: L : 24 cm (9.6") x W: 17.2 cm (6.88") / Shaft diameter : 4.547 cm (1.819")

Wall thickness: .0750 cm (0.300")

Needed tools: Assembly key for G2 connecting Pin

SKU NUMBERS

G2 CONNECTING PIN BEIGE: C01-000004

G2 CONNECTING PIN GREY: C01-000005

TERMINOLOGY

HEAD: Upper part of the CONNECTING PINS designed with a flat and anti-skid surface.

NOTCH: Manufactured recess in the pin's head that allows the tool to insert the key for screwing and unscrewing.

SHAFT: Make part of our coupling system; the threaded rod is inserted in our CANDOCK SLIDING NUTS.

ASSEMBLY PROCEDURE

1-Initiate the rotating process by hand.

2-When the CONNECTING PIN has access to the SLIDING NUT threads, proceed by screwing manually or mechanically with the proper tools.

3-Make sure to securely tighten the CONNECTING PINS until snug, without over-tightening them.

TIPS

1-When initially inserting the CONNECTING PINS in place, you can firmly "tap" the pin in place. Tapping the connectin pin ensures a firm "initial" grip of the shaft threads into the SLIDING NUT. Likewise, this "tap" helps you get the pin through the four (4) cube tabs resting on top of the SLIDING NUT.

2-Once the assembly process is completed, align the NOTCHES of every CONNECTING PIN using the manual key. This simple operation allows to quickly locate any CONNECTING PINS which could have unscrewed over time.

3-Always proceed with caution if using a power drill to fasten the CONNECTING PINS; the drill can tend to "kick." Use protective footwear. If using a power drill to unscrew pins, always loosen-up the pins manually before using the drill.

4- Never use an "impact tool" to fasten the connecting pins; it can damage the connecting pins and the assembly key for the drill as well.

SLIDING NUT



Material/Composition: High-density polyethylene resin

Available colors: Black

SKU NUMBER

SLIDING NUT: C01-000017

TERMINOLOGY

CHANNELS: Hooks molded on each side of the SLIDING NUT to securely insert the nut on the cube tabs.



ASSEMBLY PROCEDURE

Insert SLIDING NUT on the lowest available tab of the connection point.



TIPS

Always make sure no SLIDING NUTS are forgotten during the assembly process. This could result in having to dismantle the whole structure in two (2) pieces to re-insert the missing nuts.

BOLT FOR CUBE



SPECIFICATIONS

Material/Composition: High-density polyethylene resin

Available colors: White

Needed tools: Key for nut

SKU NUMBER

BOLT FOR CUBE: C01-000019

TERMINOLOGY

AUTO LOCKING RIBS: Locking ribs that ease the process of screwing and un-screwing the NUT from the BOLT FOR CUBE as it's locking into the cube tabs.



ASSEMBLY PROCEDURE


Insert BOLT FOR CUBE into the cube tabs at every connection point that another Candock accessory hasn't secured. Secure by firmly screwing the NUT with the proper tool. (KEY FOR NUT or RATCHET KEY FOR NUT)

TIPS

-It's very important to include the BOLT FOR CUBE and NUT combination on the entire perimeter of every Candock installation. This will greatly strengthen the cube assembly and assuring the longevity of the installation.

-If possible, we suggest fastening the BOLTS FOR CUBE and NUTS before putting the dock in the water. Proceeding on dry land eases the whole process.

-Make sure to include the needed SPACERS if the **tab configuration creates a void** in the assembly.

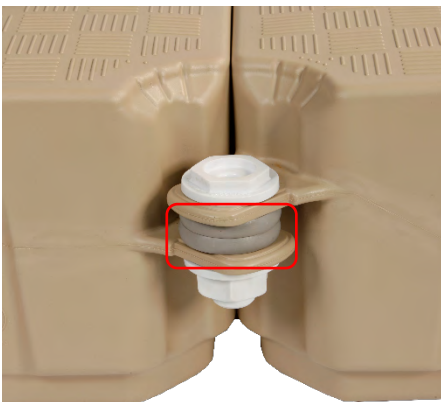

NUT



SPECIFICATIONS

Material/Composition: High-density polyethylene resin

Available colors: White

Needed tools: Key for nut

SKU NUMBER

NUT: C01-000018

ASSEMBLY PROCEDURE

Insert on each BOLT FOR CUBE and firmly tighten using the proper tools.

SPACER



SPECIFICATIONS

Material/Composition: High-density polyethylene resin


Available colors: Grey

SKU NUMBER

SPACER: C01-000020

ASSEMBLY PROCEDURE

Include spacers at every connection point where the **tab configuration creates a void** in the assembly.

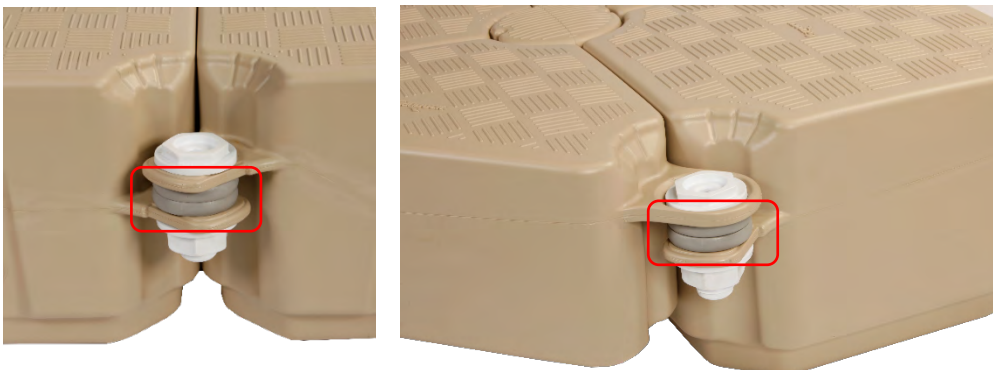

DOCK ACCESSORIES

BUMPER



SPECIFICATIONS

Material/Composition: High-density polyethylene resin with softer compound additive
Available colors: White
Needed tools: Key for nut
***Nut included**

SKU NUMBER

BUMPER: C03-000008

TERMINOLOGY

AUTO LOCKING RIBS: Locking ribs that ease the process of screwing and un-screwing the NUT from the BUMPER as it's locking into the cube tabs



ASSEMBLY PROCEDURE

Simply insert the BUMPER into the cube tabs at the desired location. Secure by firmly screwing the NUT with the proper tool. (KEY FOR NUT or RATCHET KEY FOR NUT)

TIPS

- If possible, we suggest fastening the BUMPERS before putting the dock in the water. Proceeding on dry land eases the whole process.
- Make sure to include the needed SPACERS if the tab configuration creates a void in the assembly.

VERTICAL BUMPER



SPECIFICATIONS

Material/Composition: Aluminum and PVC extrusion

Available colors: White

Needed tools: 1 1/8" ratchet socket and wrench

***Bolt for cube and nut NOT included.**

SKU NUMBER

VERTICAL BUMPER: C03-000026

ASSEMBLY PROCEDURE

Insert the VERTICAL BUMPER onto the "**pre-installed**" BOLT FOR CUBE and NUT assembly using the provided hardware (bolt, washers, and nut). Secure by firmly tightening the nut onto the bolt.

TIPS

The VERTICAL BUMPER is ideal when a Pontoon-type boat is moored alongside a Candock. It provides optimal protection for the Pontoon's round-shaped tubes.

CLEAT



SPECIFICATIONS

Material/Composition: High-density polyethylene resin

Available colors: White

Needed tools: Key for nut

SWL: 500kg (1120 lbs)


*Nut included

SKU NUMBERS

CLEAT: C03-000007

TERMINOLOGY

AUTO LOCKING RIBS: Locking ribs that ease the process of screwing and un-screwing the NUT from the BUMPER as it's locking into the cube tabs.



ASSEMBLY PROCEDURE

Simply insert the CLEAT into the cube tabs at the desired location. Secure by firmly screwing the NUT with the proper tool. (KEY FOR NUT or RATCHET KEY FOR NUT)

TIPS

- If possible, we suggest fastening the CLEATS before putting the dock in the water. Proceeding on dry land eases the whole process.
- Make sure to include the needed SPACERS if the tab configuration creates a void in the assembly.

FLUSH CLEAT ON CONNECTING PIN



SPECIFICATIONS

Material/Composition: High-density polyethylene resin and stainless steel 316

Available colors: Beige and Grey

SWL: 700kg (1500 lbs)

Needed tools: Key for pins

*Sliding nut NOT included

SKU NUMBERS

FLUSH CLEAT ON CONNECTING PIN BEIGE: C03-000085

FLUSH CLEAT ON CONNECTING PIN GREY: C03-000086

ASSEMBLY PROCEDURE

- 1- Initiate the rotating process by hand.
- 2- When the CONNECTING PIN has access to the SLIDING NUT threads, proceed by screwing manually using the KEY FOR CONNECTIN PIN. Make sure you are perpendicular to the CONNECTING PIN so that the key teeth have a firm grip on the pin.
- 3- Be sure to tighten the FLUSH CLEAT securely until it fits snugly, but do not overtighten it.
- 4- To attach a watercraft, simply pull the removable part of the cleat upwards. When the cleat is not in use, ensure that the removable part is fully retracted to avoid any risk of snagging.



H.D. BOLLARD CLEAT



SPECIFICATIONS

Material/Composition: Stainless steel 316 L

Available colors: Beige and Grey (connecting pins)

SWL: 1000kg (2200 lbs)

Needed tools: G2 key for pin, and 1 1/8" ratchet socket or wrench

*Sliding nut NOT included

***The hardware of this product is made of stainless steel and brass. If you are installing this product in a salty environment, or if there is a risk of corrosion, replace brass components with stainless steel ones. Don't forget to apply anti-seize grease to the nuts.*

SKU NUMBERS

CLEAT HD STAINLESS STEEL 316 BEIGE: C03-000058

CLEAT HD STAINLESS STEEL 316 GREY: C03-000057

ASSEMBLY PROCEDURE

1-Establish the location of the future H.D. BOLLARD CLEAT.

2-Remove the four (4) regular CONNECTING PINS that are surrounding the selected cube.

3-Insert the four (4) Connecting pins w/ 5/8" threaded rod included with the cleat. Initiate the screwing process by hand.

4-When the pin's threads are adequately engaged, manually tighten using the G2 key for connecting pin.

5-Make sure to securely tighten the connecting pins until snug, without over-tightening them.

6-Remove the nuts and washers from the steel threaded rods and put the H.D. BOLLARD CLEAT in place.

7-Secure the cleat by tightening the nuts and washers back in place with a 15/16" wrench key.

* The use of "anti-seize" grease on the threaded rods/nuts assemblies is strongly recommended.

** Do not install the H.D. BOLLARD TYPE CLEAT out the outskirts of your dock; always bring it one (1) cube inside the perimeter.

MODULAR RAILING SYSTEM

The Candock Modular Railing System has been developed with the same advantages as our Modular Floating Dock System. By allowing limitless configuration possibilities, they provide a tailored railing system for any Candock dock. The system consists of a few simple components that can provide a safe and aesthetical railing/guard rail for Candock docks.

Like our regular system, the railing/guard rail is installed on the Candock system using the same coupling mechanism. Depending on the specifications, geometries, application, and options required for your project, the same principles explained earlier apply. The coupling hardware and method vary depending on the post model.


The PVC railings and aluminum fittings are connected using a simple "push-pin" quick connect system. These fittings allow for junctions in-between lengths of PVC (if a section is longer than 20') caps, 45 degree corners, and 90 degree corners that allow for any shape of dock. Ninety (90) degree fittings are also used to create a smooth yet sturdy ending at the end of each railing section (image below).

1-SURFACE POST

It can be considered as a "guard-rail" if installed at "2-cubes" intervals with Candock's PVC pipes. See the detailed specification sheet for more information. This model replaces a CONNECTING PIN and it is to be screwed in place in combination with a SLIDING NUT. Specific tools are to be utilized. Please refer to the tools sections in the Owner's Manuals for instructions.

2-PERIPHERAL POST

It cannot be considered as a "guard-rail". Must be installed at "2-cubes" intervals or less. This model is to be installed on the Candock System's perimeter and is installed in the same fashion as a BOLT FOR CUBE/NUT assembly.


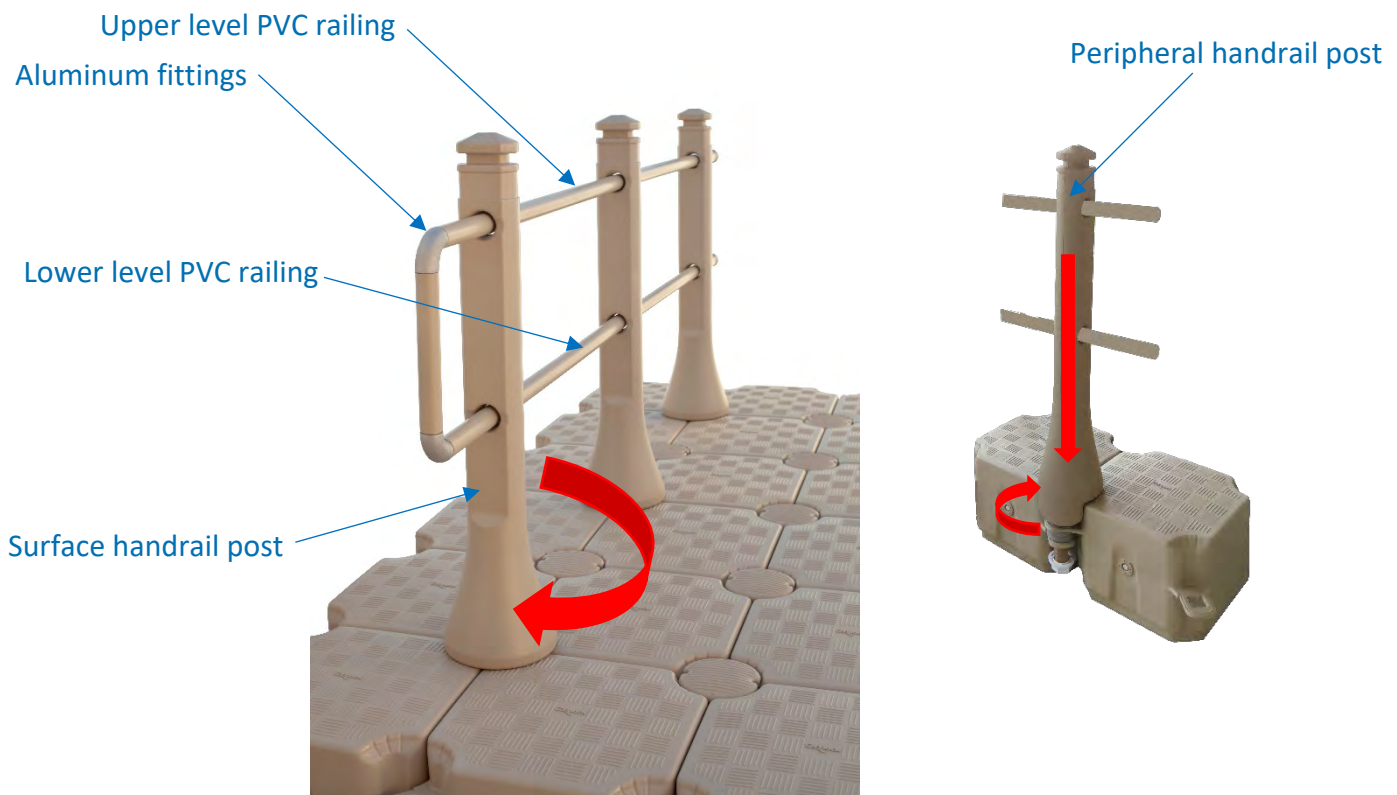


HANDRAIL POSTS AND RAILINGS (SURFACE AND PERIPHERAL)

SURFACE

PERIPHERAL

FITTINGS

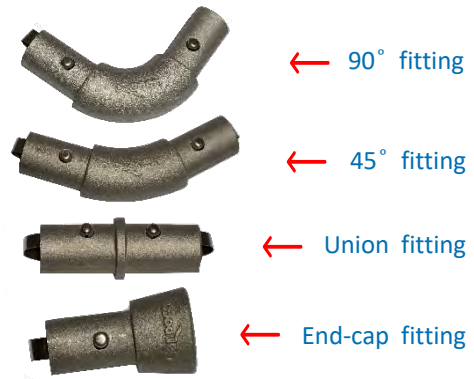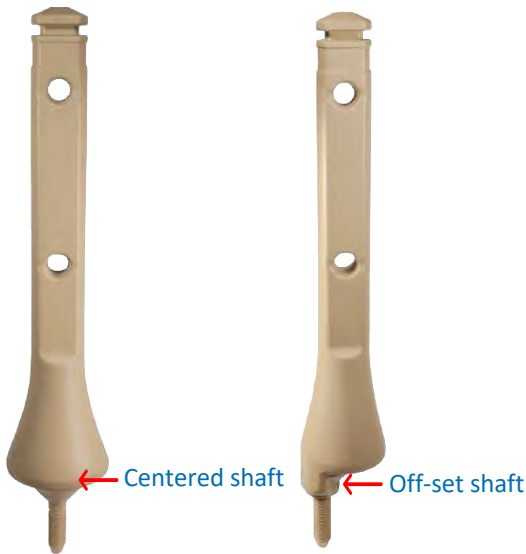

USEFUL LINKS AND RESOURCES:

[Website](#)

[YouTube](#)

SPECIFICATIONS

Material/Composition: High-density polyethylene resin and casted aluminum

Available colors: Beige and Grey

Dimensions posts: Post height: 107.cm (42.3'') / Railing height: 92.1cm (36.25'')

Dimensions railings: O/D 4.19cm (1.65'') x L 6.09m (20') per section

Weight: Post 2.27 kg (5 lbs.)

Needed tools: Key for surface post or Key for nut, Drilling Template for Handrail.

SKU NUMBERS

SURFACE POST BEIGE: C03-000001

SURFACE POST GREY: C03-000002

PERIPHERAL POST BEIGE: C03-000003

PERIPHERAL POST GREY: C03-000004

PVC RAILING BEIGE: C03-000043

PVC RAILING GREY: C03-000044

90° FITTING: C03-000028

45° FITTING: C03-000027

UNION FITTING: C03-000030

END-CAP FITTING: C03-000029

DRILLING TEMPLATE FOR HANDRAIL: C04-000008

ASSEMBLY PROCEDURE

SURFACE POST

- 1-Determine the location of the post you want to install.
- 2- Using the proper tool, remove the CONNECTING PIN that is in the selected location.
- 3-Insert the surface post and initiate the rotating process by hand.
- 4-When the SURFACE POST has access to the SLIDING NUT threads, proceed by screwing manually or mechanically with the proper tool.
- 5-Make sure to tighten the SURFACE POST until snug, without over-tightening.

NOTES

-Intervals (spacing) between each post should be of 2 cubes if the railing system is utilized as a guard rail. PVC railings should also be included at both levels (upper and lower) to provide sufficient rigidity for the whole assembly.

-A wider span can be considered if the railings are destined to provide walking/traffic assistance instead of preventing accidental falls off the dock.


Ropes could be considered for the horizontal railings instead of PVC if the railings are destined to provide walking/traffic assistance instead of preventing accidental falls off the dock.

PERIPHERAL POST

1-Determine the location of the post you wish to install.

2-Remove the potential installed BOLT FOR CUBE / NUT assembly at the selected location using the proper tool.


3-Insert the surface post while making sure to include the needed SPACERS (4x) and STRENGTHENING SPACER (1x) as you insert the post on the cube's tabs. The STRENGTHENING SPACER is to be inserted at the lowest possible point on the post's shaft. The "regular" SPACERS are to be inserted at the connection point where the **tab configuration creates a void** in the assembly. No SPACERS should be included higher than tab #4 (see image). The "neck" of the post must be "sitting" directly on top of the tab (or spacer) #4.

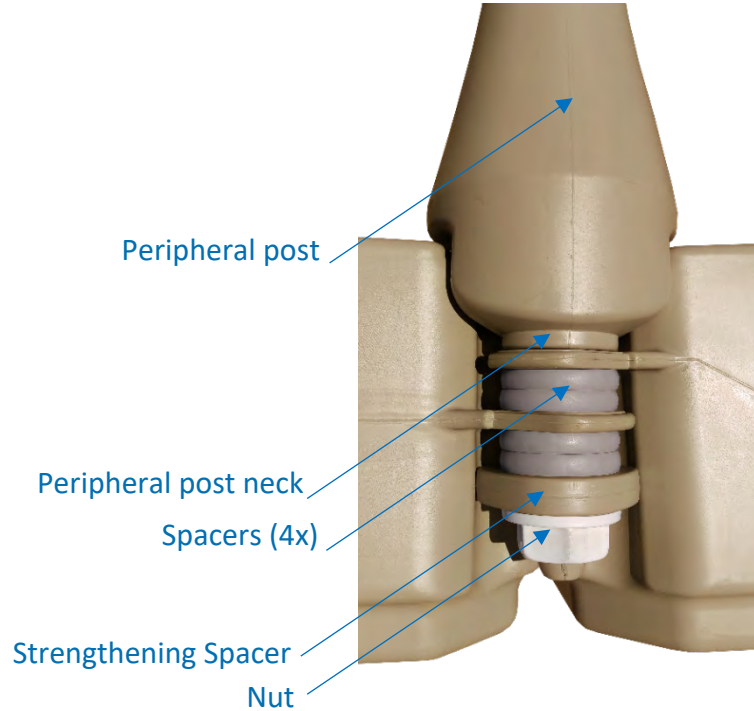

4-Finalize the assembly by firmly tightening the NUT at the bottom of the post's shaft.

TIP

-To create a stiffer assembly in a calm body of water, link the upper and lower PVC rails by adding a vertical PVC section of 29.2cm (11 ½") between (2x) 90° fittings. This step creates a stiffer assembly between the upper and lower PVC rails.

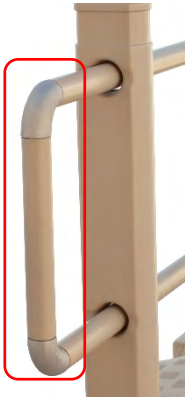


PRODUCT LIMITATIONS

- Regardless of the water conditions and main application of the floating dock, it is not recommended to use these handrails in conditions where waves are subjected to exceed 3 '(1m).
- Unless installed in an environment completely protected from wave action, the ropes or pipes must have buffers of at least 45cm (18") at each end to allow free movement of the ropes OR PVC pipes through the posts.
- If using rope instead of PVC pipes, we recommend using a rope possessing high resistance to friction and abrasion.
- If using PVC pipes, the corners or "end section" of the handrail system (45 deg. ,90 deg. End-cap) cannot withstand waves of more than 30cm (12") for extensive periods. We, therefore, recommend leaving any corner section or "end section" as free as possible by adding the necessary buffers to your pipe measurements.

LED LIGHT SYSTEM

The Candock LED light system shares many components and concepts found in our SERVICE CHANNEL SYSTEM. Replacing "solid colored" covers with translucent covers, we allow for light-emitting diodes (LED lights) to be installed within the covers to brighten the surface of your Candock dock.


As it is the case with our SERVICE CHANNEL system, the covers are secured on the Candock system using the same two (2) coupling mechanisms. Depending on the specifications, geometries, application, and options required for your project, the same principles explained earlier apply.

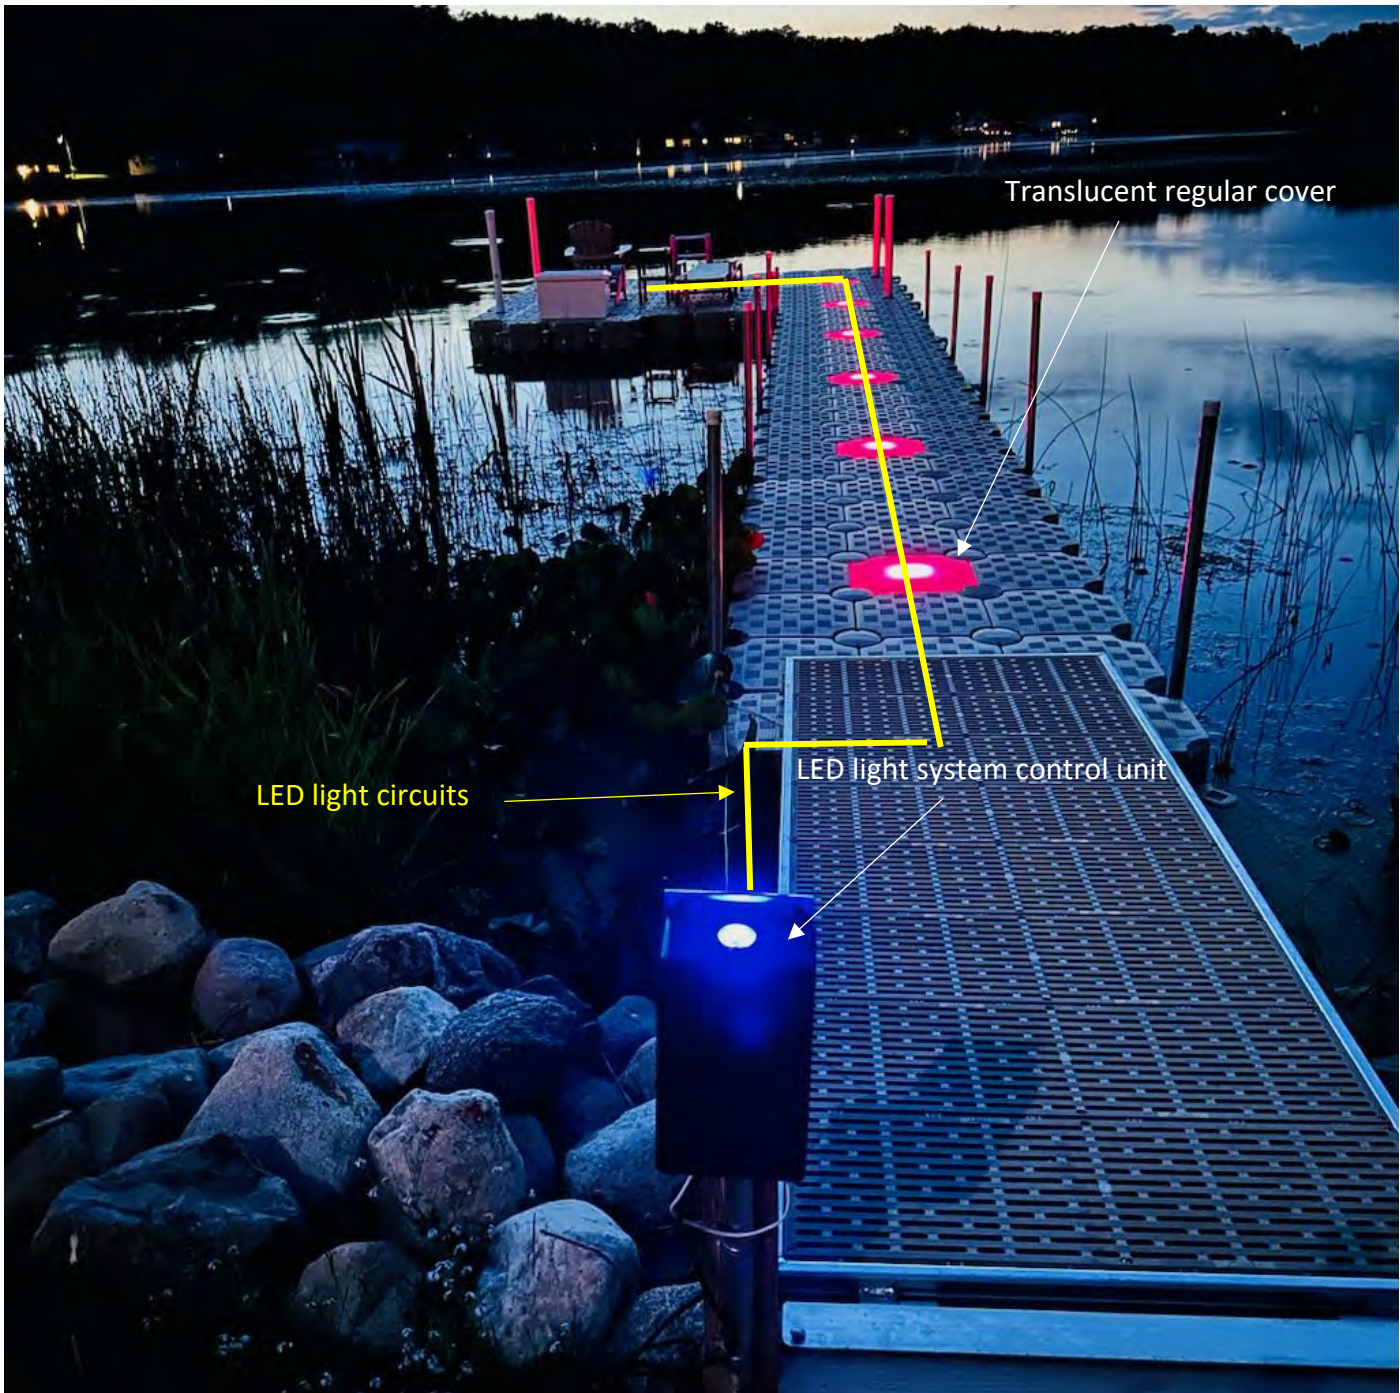


LED LIGHTS - CONTROL UNITS - COVERS



Regular service cube with translucent COVER

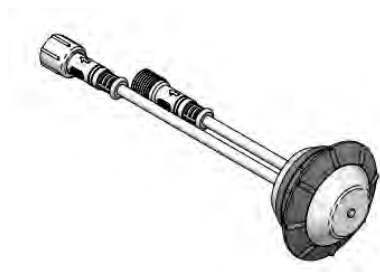

L.E.D. LIGHT

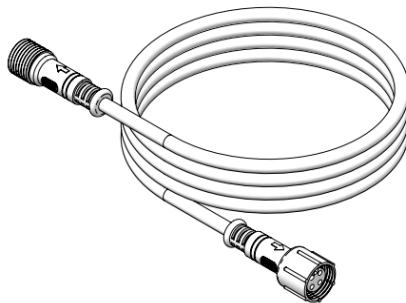

10FT EXTENSION CORD



POWER UNIT

SPECIFICATIONS

Material/Composition: Covers: high-density polyethylene resin

Available colors: Covers: white/translucent

Light Bulbs: RGB

Needed tools: Basic tool kit for the converter assembly and connections.

[Youtube instructions](#)

SKU NUMBERS

TRANSLUCENT SERVICE COVER: C01-000010

EXTENSION CORD 10': C03-000035

LED LIGHT BULB: C03-000025

CONTROLL UNIT, NORTH AMERICA: C03-000059

CONTROLL UNIT, EUROPE: C03-000066

CONTROLL UNIT, U.K.: C03-000067

TERMINOLOGY

LIGHT BULB: Custom design light-emitting diodes that are destined to light-up any CANDOCK dock, pontoon, platform, or marina. Perfectly sealed and extremely durable, these light bulbs are the most reliable and practical solution to bring light to any CANDOCK floating structure. They are RGB, so you will have the choice between multiple colors.

EXTENSION CORD 10': These cables are mandatory if you have more than 1 cube between each light, and to get from the control unit to your first light.

CONTROL UNIT: This control unit is equipped with a photocell and allows you to change the color of your lights. It is also equipped with a DC to 12V current transformer to power your lights in complete safety.

ASSEMBLY PROCEDURE


PROCEDURE

1- Proceed with cube assembly without installing covers on the G2 SERVICE CUBE bases.



2- Plug and test the control unit. Under a bright light, the photocell will need to be covered to trigger the lights. Once you have confirmation everything is working as expected, proceed with the other steps. We also recommend to keep the control unit "ON" during the whole process, so you have confirmation that every lights you add on the systems works and are well plugged.

3- Starting from the control unit, insert the 1st light in the pre-drilled hole of the cover. The seal has a small slot that allows a firm fit. Once the 1st light is installed, repeat the same steps for further lights. Remember to start from shore and make your way from there.

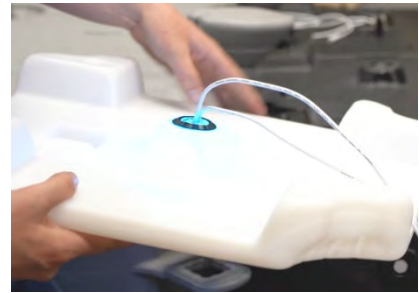

4- When plugging the lights together, make sure to align both notches on the female and male connectors. Push the male connector until it touches the rubber gasket to assure a dust and water free connection.

5- Once you have a couple of lights plugged in, you can then start putting the covers on and fixing them in place with the connecting pins.





6- When installing the Control unit, it is best to put it as close to the dock as possible. From the control unit, run 10' extension cords (as needed) to the 1st light. The cable can be attached under the gangway for a cleaner installation.

NOTES

-The lights can be installed in the covers and the covers put in place as you go.

-You must ensure that you do not exceed the capacity of your converter. The limit is 50 lights or 200'/60m, whichever comes first. A second converter is required if you go past the number of lights or the maximum cable length.

-If you need to remove a light already installed in a cover, do not remove it by pulling on the wire. Push the light entirely inside the cover, remove the ring, and then it is easy to pull out the light from the cover.

-Our LED light system works with AC only. Many options exist to convert AC into DC current, but Candock does not provide this option.

OUTBOARD ENGINE MOUNT



SPECIFICATIONS

Material/Composition: High-density polyethylene resin and aluminum 6061

Needed tools: 1 1/8" ratchet socket and wrench

Suggested HP rating the outboard engine: 5 to 10 hp max.

*Bolt for cube and nut not included.

***The hardware of this product is made of stainless steel and brass. If you are installing this product in a salty environment, or if there is a risk of corrosion, replace brass components with stainless steel ones. Don't forget to apply anti-seize grease to the nuts.*

SKU NUMBER

OUTBOARD ENGINE MOUNT: C03-000036

ASSEMBLY PROCEDURE

Simply insert the ENGINE MOUNT onto the "pre-installed" BOLT FOR CUBE and NUT assembly using the provided hardware (bolts, washers, and nuts). Secure by firmly tightening nuts.

TIPS

-Make sure to include the needed SPACERS if the tab configuration creates a void in the assembly.

WARNING

Use of this product in combination with our modular floating dock system converts it into a boat and is therefore considered as is by transport Canada (the same situation could apply to other countries) and must respect the laws applying to boats. Our dock system is not designed for navigation, and Candock Inc. disclaims any responsibility if used with an engine of any type whatsoever. It is the sole responsibility of the purchaser to comply with the laws in force.

SWIM LADDER



USEFUL LINKS AND RESOURCES:

[Website](#)

[YouTube](#)

[Box content](#)

SPECIFICATIONS

Material/Composition: High-density polyethylene resin

Available colors: Beige and Grey

Maximal weight rating: 114kg (250lbs)

Needed tools: G2 key for pin, Key for nut, and 9/16" ratchet socket and wrench

***Needed nuts and spacers included.**

****The hardware of this product is made of stainless steel and brass. If you are installing this product in a salty environment, or if there is a risk of corrosion, replace brass components with stainless steel ones. Don't forget to apply anti-seize grease to the nuts.**

SKU NUMBERS

SWIM LADDER BEIGE: C03-000020

SWIM LADDER GREY: C03-000021

ASSEMBLY PROCEDURE

- 1-Pre-assemble the ladder as shown on the manual included in the box.
- 2-Establish the desired location of the ladder.
- 3-Remove the (2x) regular CONNECTING PINS and BOLTS FOR CUBE located where you wish to install the ladder.
- 4-Insert and tighten the (2x) provided connecting pins with threaded rods.
- 5-Insert the two (2) treaded parts of the ladder's up-rights into the chosen tabs. Manually engage the threads of the NUTS.
- 6-Insert the threaded rods of the connecting pins into the uprights' holes and screw the brass nuts and washer firmly.
- 7-Firmly tighten the NUTS with the proper tool.

TIPS

- Make sure to include the (4x) needed SPACERS on the threaded shafts of the (2x) uprights (2 on each side).

BENCH



SPECIFICATIONS

Material/Composition: Aluminum and fiber-glass re-enforced polypropylene panels

Available colors: Beige and Grey

Maximal weight rating: 227kg (500lbs)

Needed tools: G2 key for pin, and ½" ratchet socket or wrench

***The hardware of this product is made of stainless steel and brass. If you are installing this product in a salty environment, or if there is a risk of corrosion, replace brass components with stainless steel ones. Don't forget to apply anti-seize grease to the nuts.*

[Youtube instructions](#)

SKU NUMBERS

BENCH BEIGE: C03-000011

BENCH GREY: C03-000012

ASSEMBLY PROCEDURE

- 1-Establish the location of the future BENCH on the dock.
- 2-Remove the two (2) regular CONNECTING PINS located under the bench's future location.
- 3-Insert the 2 CONNECTING PIN W/ MULTI-BASE ADAPTOR that support the legs for the bench. Initiate the screwing process by hand.
- 4-When the pins are properly inserted, proceed by screwing manually using the key for pin as a lever inside the **pre-drilled hole**
- 5-Make sure to securely tighten the CONNECTING PIN W/ MULTI-BASE ADAPTOR until snug.
- 6-You can now assemble the bench parts (the two (2) panels and the two (2) frame units). While assembling the panels, use the aluminum re-enforced one for the seat and the regular one for the backrest. Properly align the mounting holes together while centering the panels on the frame units. We recommend using "long nose" pliers to prevent the bolts from stripping the plastic inserts while screwing the nuts in place.
- 7-Simply insert the bench assembly into the CONNECTING PIN W/ MULTI-BASE ADAPTOR.



REVOLVING AND FOLDING SEAT



SPECIFICATIONS

Material/Composition: Aluminum, plastic, and synthetic leather

Available color: Grey only

Maximal weight rating: 114kg (250lbs)

Needed tools: G2 key for pin

SKU NUMBER

REVOLVING AND FOLDING SEAT: C03-000013

ASSEMBLY PROCEDURE

- 1-Establish the location of the future REVOLVING AND FOLDING SEAT on the dock.
- 2-Remove the regular CONNECTING PIN that is under the seat's future location.
- 3-Insert the CONNECTING PIN W/ MULTI-BASE ADAPTOR that support leg for the bench. Initiate the screwing process by hand.
- 4-When the pin is properly inserted, proceed by screwing manually using the key for pin as a lever inside the **pre-drilled hole**
- 5-Make sure to securely tighten the CONNECTING PIN W/ MULTI-BASE ADAPTOR until snug.
- 6-Simply insert the REVOLVING AND FOLDING SEAT assembly into the CONNECTING PIN W/ MULTI-BASE ADAPTOR.



STORAGE CUBE



SPECIFICATIONS

Material/Composition: High-density polyethylene resin and ABS hatch.

Available colors: Beige and Grey

Needed tools: G2 key for pin, and #2 Philips head screwdriver

SKU NUMBERS

STORAGE CUBE G2 BEIGE: C03-000010

STORAGE CUBE G2 GREY: C03-000009

ASSEMBLY PROCEDURE

See the regular CUBE assembly procedure.

NOTICE

- Note the orientation of latch for product ease of use.

To prevent the seal/gasket's premature wear, the pivoting handle is not tightened when items are shipped. A Philips head screwdriver is required to tighten the handle in place. Open the hatch, and the screw is underneath the handle. Make sure the handle can still move freely while compressing the seal.



MOORING WHIPS SUPPORT



SPECIFICATIONS

Material/Composition: Aluminum and stainless steel 316
Available colors: Beige and Grey
Needed tools: G2 key for pin, key for nut, 9/16" ratchet socket or wrench, and 1 1/8" ratchet socket and wrench


***The hardware of this product is made of stainless steel and brass. If you are installing this product in a salty environment, or if there is a risk of corrosion, replace brass components with stainless steel ones. Don't forget to apply anti-seize grease to the nuts.*

SKU NUMBERS

MOORING WHIPS SUPPORT BEIGE: C03-000037
MOORING WHIPS SUPPORT GREY: C03-000038


ASSEMBLY PROCEDURE

- 1-Establish the location of the future MOORING WHIP SUPPORT.
- 2-Remove the regular CONNECTING PIN that is at the selected area.
- 3-Remove the nut and washer from the **CONNECTING PIN W/ 1/2" THREADED ROD** and set it aside. Insert the pin and initiate the screwing process by hand. When the pin is inserted correctly, proceed by screwing manually using the key for pin. This first component acts as an anchoring point for the whip support onto the dock.
- 4-Install the **BOLT FOR CUBE and NUT** assembly onto the tabs of the selected location.
- 5-Fasten your **mooring whip base*** against the aluminum plate to have access under the plate.
- 6-Take the whole assembly and fix it against the **CONNECTING PIN W/ 1/2" THREADED ROD** and the **BOLT FOR CUBE and NUT** assembly.
- 7-Complete by screwing the destined nuts and washers using the proper key wrench ratchet.

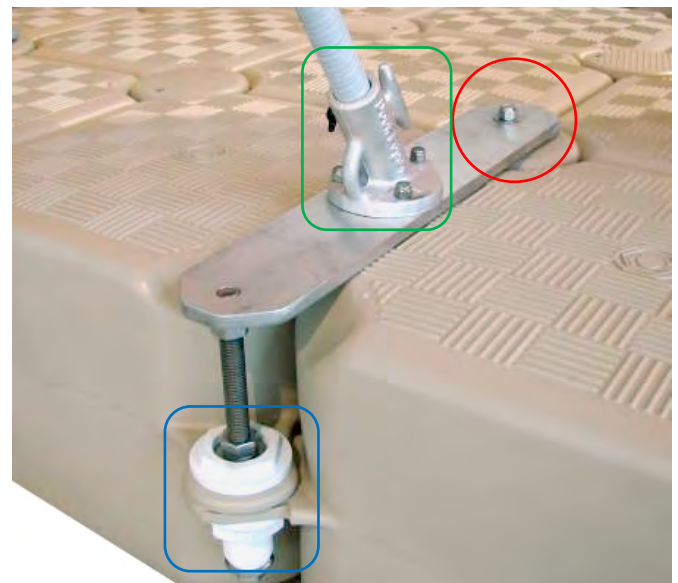

*Mooring whip base and whip sold separately. See [here](#) for our suggested whip supplier.

MODULAR KAYAK RACKS (SINGLE AND DOUBLE)

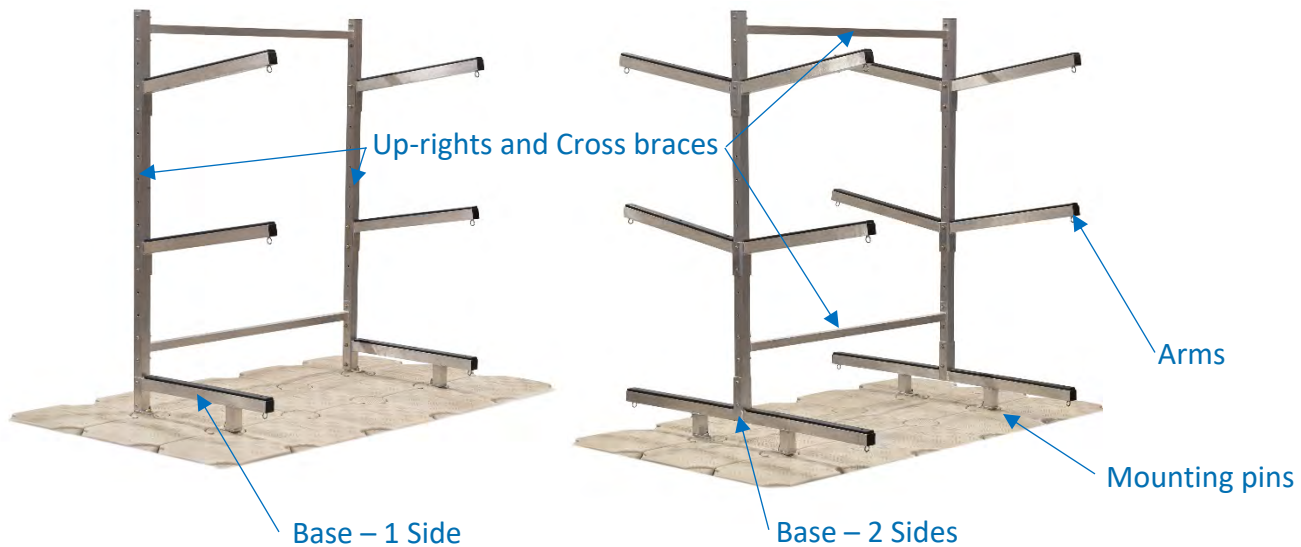

SPECIFICATIONS

Material/Composition: Aluminum, HDPE, and SS Hardware

Needed tools: G2 key for pin, 9/16" ratchet socket or wrench, and 7/32" Halen key

***The hardware of this product is made of stainless steel and brass. If you are installing this product in a salty environment, or if there is a risk of corrosion, replace brass components with stainless steel ones. Don't forget to apply anti-seize grease to the nuts.*

ASSEMBLY PROCEDURE

- 1-Establish the location of the future MODULAR KAYAK RACK on the dock.
- 2-Remove the regular CONNECTING PINS (4x) that are at the mounting points.
- 3-Insert the KAYAK RACK MOUNTING PINS that act as mounting points for the Kayak Rack bases. Initiate the screwing process by hand. When the pins are correctly inserted, proceed by screwing manually using the key for pin.
- 4-Position and secure the KAYAK RACK BASES on the mounting pins.
- 5-Position and secure the UP-RIGHTS and CROSS BRACES onto the KAYAK RACK BASES.
- 6-Position and secure the KAYAK RACK ARMS onto the UP-RIGHTS.


NOTICE

- A maximum of **75lbs per vessel space** should be applied on the rack.
- A maximum of **300lbs** should be applied on the ONE SIDE rack assembly.
- A maximum of **600lbs** should be applied on the TWO SIDES rack assembly.
- If using the TWO SIDES rack, weight should be evenly distributed between each side.

SKU NUMBERS

KAYAK RACK BASE – 1 SIDE (PAIR): C03-000032
KAYAK RACK BASE – 2 SIDES (PAIR): C03-000033
KAYAK RACK WALL MOUNT SUPPORT (PAIR): C03-000031
KAYAK RACK – 2 UPRIGHTS + 2 CROSS BRACES: C03-000034
KAYAK RACK ARMS (UNITS): C03-000015
KAYAK RACK MOUNTING PIN BEIGE (UNIT): C03-000051
KAYAK RACK MOUNTING PIN GREY (UNIT): C03-000052

KAYAK LAUNCH BAR WITH PIN

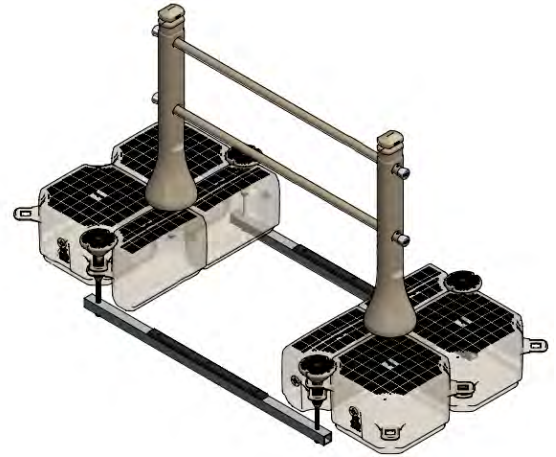

SPECIFICATIONS

Material/Composition: Aluminum, HDPE, and SS Hardware
Needed tools: Manual key for G2 pin and a ratchet with a 1 1/8 box.
[YouTube Tutorial](#)

SKU NUMBERS

KAYAK LAUNCH BAR WITH PIN, GREY: C03-000108
KAYAK LAUNCH BAR WITH PIN, BEIGE: C03-000109

ASSEMBLY PROCEDURE

- Once the location has been selected, remove the two existing G2 connecting pins and replace them with the surface posts. Make sure the holes in the posts are perfectly aligned, facing each other.



- Remove one end cap from each pipe, then insert the two PVC pipes into the holes of the surface posts. Once the pipes are in place, reinstall the end caps and ensure both **push buttons** are fully engaged.



- Replace the **four connecting pins** located on each side of the surface posts with the special pins equipped with threaded rods.



From this point on, you will need to enter the water to continue the assembly.



- Install the two aluminum supports onto the threaded rods. Tighten the nylon lock nuts with a ratchet wrench to secure them in place.

Important: Do not fully tighten the supports against the cubes. Leave a small amount of clearance so the supports can move slightly with wave action.

RECOMMENDATION

Since the lower section (the supports located in the water) is attached to two floating dock sections, it is not recommended to install this kayak support bar in an area heavily exposed to waves.

The repeated movement of the dock caused by wave action may lead to premature wear of certain components and could result in damage.

DOUBLE LAYER ROD KIT



SPECIFICATIONS

Material/Composition: High-density polyethylene resin and Stainless steel 316

Needed tools: Key for nut, (2x) 1 1/8" wrenches OR (2x) adjustable wrenches

* 2 Bolts for cube and two (2) nuts included.


**The hardware of this product is made of stainless steel and brass. If you are installing this product in a salty environment, or if there is a risk of corrosion, replace brass components with stainless steel ones. Don't forget to apply anti-seize grease to the nuts.

SKU NUMBER

DOUBLE LAYER ROD KIT: C03-000022

ASSEMBLY PROCEDURE

- 1-Determine position of the DOUBLE LAYER ROD KIT.
- 2-Install the BOLT FOR CUBE and NUTS at the top and bottom connection points.
- 3-Insert the stainless-steel rod in the BOLT FOR CUBE while aligning the top and bottom layers. When the top layer is passed through, insert the **two (2) nuts and two (2) washers** needed between the two (2) layers.
- 4-Complete the installation by inserting the bottom nuts and washers and tightening all the above correctly.

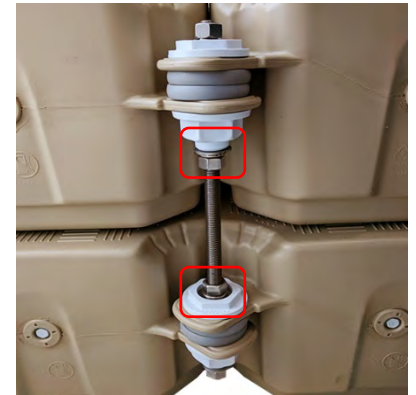

TIPS

-Always start by assembling and installing the bottom layer first. Make sure you do not build longer sections than 10-15 cubes for the top layer. This is to keep the sections as manageable as possible. Drag that layer on top of the bottom layer. Before dragging too many sections, make sure to secure the previous ones with a few double-layer kits.

- Intervals (spacing) between each kit should be of 3 to 4 cubes at the most: depending on the application and environment.



Just a few years ago, solar lighting was considered a secondary option: limited autonomy, inconsistent brightness, uneven performance. Today, the technology has made remarkable progress. The latest generation of solar lights delivers power, reliability, and lighting quality that now rival traditional electric systems. Choosing solar is no longer a compromise, it's a modern, efficient, and intelligent solution, perfectly suited to the realities of docks and marine environments.

In many situations, solar even becomes the only logical choice. Bringing electricity to a dock can be complex, costly, or sometimes simply impossible. Solar eliminates these constraints and makes it possible to install high-performance lighting exactly where it's needed. Beyond practicality, lighting also transforms the dock experience: it extends evenings, improves safety, and creates a warm atmosphere that invites you to enjoy every moment, even after sunset.

To ensure the longevity and performance of the solar lights described below, it is important to follow a few simple guidelines. If you live in a region where the dock must be removed or stored for the winter, we recommend **taking down the light and storing** it in a dry, heated space. **Once or twice** during the cold season, it is advisable to expose the solar panel to daylight to help maintain the battery's condition and preserve its full capacity. All of our lights are equipped with a switch that allows them to be completely turned off during storage, an important step in maximizing battery life.



PATH LIGHT



SPECIFICATIONS

Material/Composition: Cast aluminum and polycarbonate

Needed tools: Cordless drill and screwdriver bit (Phillips)

[YouTube Tutorial](#)

SKU NUMBER

PATH LIGHT: C03-000112

ASSEMBLY PROCEDURE

- Since our manual assembly key is not long enough to allow tightening with the light installed, you must first install the connecting pin.



- Place the Path Light over the center of the connecting pin, and using the two screws provided in the box, secure the light with a drill.

TIPS

It is important not to overtighten the two metal screws into the Candock connecting pin. The pin is made of plastic, and excessive tightening may damage or strip the threads.

Additionally, since it is often necessary to remove the light for the winter season, keeping the threads in good condition will greatly facilitate reinstallation in the spring and ensure a strong, durable assembly year after year.

POST LIGHT ON CONNECTING PIN



SPECIFICATIONS

Material/Composition: Powder-coated aluminum, polycarbonate, and stainless steel hardware

Needed tools: Manual key for G2 pin, Allen key

[YouTube Tutorial](#)

SKU NUMBER

POST LIGHT ON CONNECTING PIN: C03-000103

ASSEMBLY PROCEDURE


- Once the location on the dock has been chosen, remove the G2 assembly bolt in place and replace it with the Post Light. Begin tightening manually until you feel firmer resistance.



- When tightening becomes difficult by hand, finish securing the Post Light by using the top of the post to achieve a firm, safe fit.



- If you need to remove the top (for winter storage, for example), loosen the three bolts using an Allen key, then carefully lift it off.



- The red button allows you to turn off the light or select the LED color according to your preference.

MAST LIGHT ON POST CUBE



SPECIFICATIONS

Material/Composition: Powder-coated aluminum, polycarbonate, and stainless steel hardware

Needed tools: Manual key for G2 pin, ratchet and Allen key

[YouTube Tutorial](#)

SKU NUMBER

MAST LIGHT ON POST CUBE GREY: C03-000113

MAST LIGHT ON POST CUBE BEIGE: C03-000114


ASSEMBLY PROCEDURE

- Place the post cube on its side, then insert the 3-inch post through the cube.



- Next, attach the aluminum bracket using an impact drill with a 1 1/8" socket. This bracket reinforces the assembly and prevents the light from rotating.

- You can now integrate the post cube into the rest of the dock assembly at your desired location.

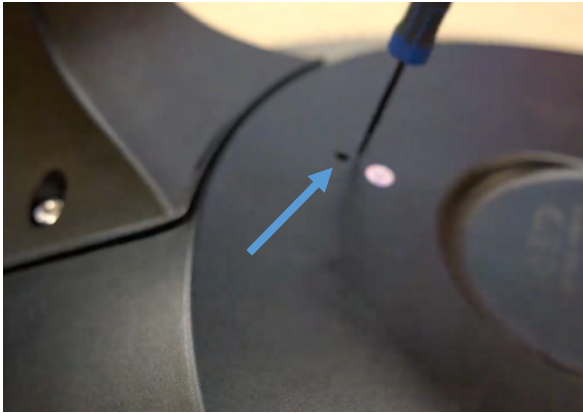

- Before installing the lamp head onto the post, make sure it is working properly. Using a small screwdriver (or a sufficiently thin rod), press the button to turn on the light. You can also use the controller and the "Test" button to confirm that it is functioning correctly.

- Using a step ladder, place the lamp head onto the aluminum post and adjust it to the desired direction. Then, tighten the two bolts at the back of the head with an Allen key to secure it firmly in place.



RECOMMENDATION

Since this light weighs approximately 25 lb and is installed at nearly 10 feet high, we recommend installing it in an area where the dock is not exposed to strong waves.

Due to its height and weight, the light can create significant leverage when the dock is affected by water movement, which may cause premature wear or damage to some components.

MARINE LIGHT WITH 7FT POLE



SPECIFICATIONS

Material/Composition: Aluminum, polycarbonate, and stainless steel hardware
Needed tools: Screwdriver (or 5/16-inch diameter rod) and ratchet wrench
[YouTube Tutorial](#)

SKU NUMBER

MARINE LIGHT: C03-000102


ASSEMBLY PROCEDURE

- Remove the black cover located under the beacon by unscrewing the four screws that hold it in place. You will need to connect the battery to power the beacon. The red wire is not connected, simply attach it.



- Replace the cover, then attach the beacon to the aluminum disk using the hardware included in the box.

- Once the location on the dock has been chosen, remove the existing G2 connecting pin and install the screw-in post. Begin tightening manually until you feel firmer resistance.

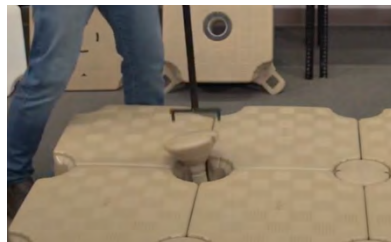

- Finish tightening using a screwdriver or a 5/16" rod. A hole at the base of the tube is specifically designed for this purpose.

⦿ ANCHORING PRODUCTS

PILINGS INTRODUCTION

The piling anchor method is one of the most common and popular approaches there is. Providing unmatched stability to the floating dock, they are often the preferred option if the environment and conditions allow it.

The anchoring of a floating dock with pilings requires most of the below conditions:

- Protected (sheltered) location which is not subject to high swells, waves, or wakes.
- Water depths in the low to medium range, depending on the types of pilings.
- Tractable nature of the seabed, depending on the types of pilings.

CANDOCK'S PILING SYSTEMS

Candock has developed a piling system that features noticeable advantages. Being a cost-effective, simple, and considered a temporary method, it also has its limitations. Through the below section, we demonstrate the best practices regarding our piling system.

Additionally, Candock has developed accessories that may be added to widen the scope of possibilities.. As an example, we stated above that water depths must be in the low to mid-range for the piling approach to be considered. With that in mind, in specific environments where a fixed structure is readily available and adjacent to the future floating dock installation, we are proposing accessories that allow for those water depths to be a bit more considerable while maintaining optimal stability. By fastening the piles' upper section onto those existing fixed structures (seawall, fixed crib dock, fixed dock on posts, etc.), we can achieve optimal stability while allowing deeper waters.

OTHER PILING ATTACHMENT OPTIONS

Candock also developed piling attachments to help our customers who already have existing piles which they can secure their Candock dock. The below section illustrates the most common accessories Candock has been using in the past years.

CANDOCK'S PILING SYSTEMS



OTHER PILING ATTACHMENT OPTIONS



POST CUBE + 2 7/8" X 0.120 GALVANIZED STEEL PILE + 3" PVC SLEEVE AND CAP



USEFUL LINKS AND RESOURCES:

[YouTube](#) for cube assembly

[Website](#)

TAB POSITIONS

	#6
	#5
	#4
	#3
	#2
	#1
	#0
	#-1

SPECIFICATIONS

Material/Composition: High-density polyethylene resin, ABS flange, expanded polystyrene, galvanized steel, and PVC

Available colors: Beige and Grey

Surface: Anti-skid

Dimensions: L x W: 48 cm (19") x 48 cm (19") H: 36 cm (14")

Dimensions (low profile cube): L x W: 48 cm (19") x 48 cm (19") H: 23 cm (9")

Weight: Cube: 9 kg (20 lbs.) / Low profile cube: 8 kg (17 lbs.)

Needed tools: G2 key for pin, Key for nut, piling bull, piling driver, piling lever, but saw or zip cut grinder, PVC glue, and ratchet tool kit

SKU NUMBERS

G2 POST CUBE BEIGE: C06-000002

G2 POST CUBE GREY: C06-000003

LOW PROFILE G2 POST CUBE BEIGE: C06-000005

LOW PROFILE G2 POST CUBE GREY: C06-000005

2 7/8" GALVANIZED STEEL PILE: C06-000035

3 1/2" PVC SLEEVE x 20FT LENGHT: C06-000001

3 1/2" PVC SLEEVE x 6,5 FT (BOX): C06-000074

PVC CAP: C06-000019

TERMINOLOGY

FLANGE: Ultra-resistant plastic insert that allows a fluid yet durable system. It allows the POST CUBE to move up and down on the pile (with tidal or seasonal variations) without any restriction while ensuring a sturdy and durable anchoring method.

ASSEMBLY PROCEDURE

See the CUBE assembly procedure.

IMPORTANT PRINCIPLES

The below principles and notions apply to Candock's piling system in general. We recommend that the specifications of the combined products remain unchanged. Outside diameters of both the steel piles and PVC sleeves and the below guidelines are of the utmost importance to ensure the components' proper functioning altogether. See diagrams on the following page for additional visual explanations.

WATER DEPTH: Water depths should not exceed 2m (6.6') to ensure optimal stability.

NATURE OF SEABED: The composition of the soil/ground underwater must be tractable. I.E., Sand, mud, or small gravel.

PILE DEPTH : The piles should be inserted in the ground at 60cm (2'), ideally 90cm (3').

VERTICALITY: All piles should be perfectly vertical after installation is complete. The use of a level is highly recommended.

PROTECTED ENVIRONMENT: Any Candock system that is to be anchored with our piling system should not be subjected to waves of more than 60cm (2'). Candock's piling system is extremely restrictive in the amount of leeway it will allow to the dock. Aggressive waters may translate to premature wear of the components.

CANDOCK'S PILES WORK IN PAIRS: Candock's piling system implies that the piles are configured in pairs.

EACH PAIR OF POST CUBES SHOULD BE AT MAXIMAL INTERVALS OF 7m TO 9m (23 TO 30'): To maintain optimal stability and linear geometry, each pair of post cube should not exceed a distance of more than 9m (30').

OTHER CUBES ON 3 SIDES SHOULD ALWAYS support POST CUBES.: In other words, a post cube should never be installed on the outside corner of a Candock dock. It should always be recessed inside of 1 cube; on at least one (1) side.

POST CUBES SHOULD NEVER RUB DIRECTLY AGAINST THE STEEL PILES: This implies that the lengths of PVC sleeves must always span the total length of seasonal or tidal fluctuations of water levels. The PVC sleeve should be going deep enough for the post cube to rub on the PVC sleeve at the lowest possible water levels.


PVC SLEEVES IN 20 FT LENGTH OR IN BOXES: During transportation, we can add 20-ft PVC pipes along the sides of trucks or containers, but the limited space does not allow for adequate protection, which may result in scratches. To receive the sleeve in perfect condition, it is therefore recommended to order the 6.5-ft lengths boxed.

PVC CAPS (INCLUDING RUBBER INSERT) ARE MANDATORY: Each pile/PVC sleeve combination should be completed with a glued PVC cap and rubber insert.

TIPS

-Candock suggests that the piles protrude of approximately 1m to 1.5m (3-5 ft.) above the dock surface; at an average high-water level. Doing this allows for an insurance policy if the water level should unforeseeably rise.


PILE POSITION EXAMPLES

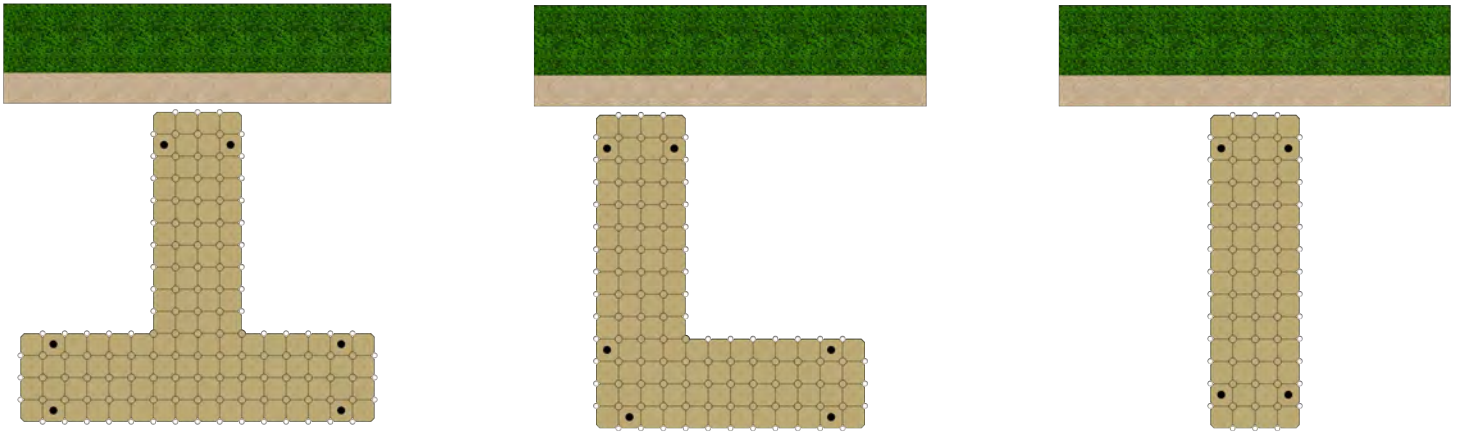

ALL FEATURED PILES ARE WORKING IN PAIRS AND ARE SUPPORTED/SURROUNDED ON AT LEAST 3 SIDES.

MAXIMAL DISTANCE BETWEEN EACH SET OF PILES IS LESS THAN 9M (30')


POST CUBE / STEEL PILE / PVC SLEEVE AND CAP COMBINATION

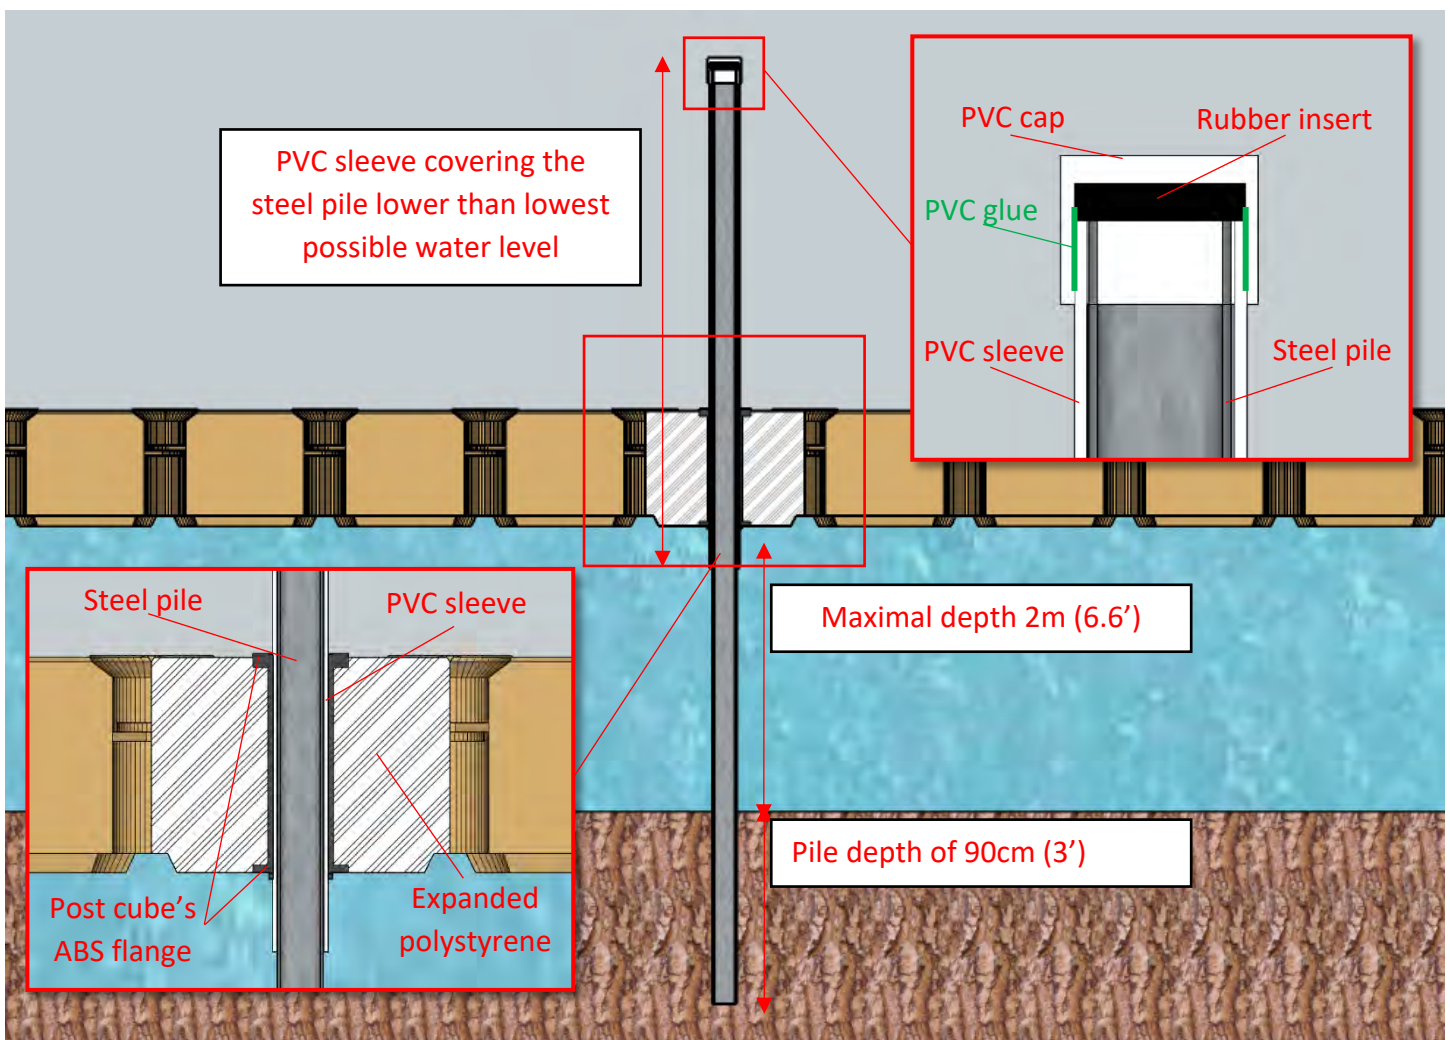

A FEW EXAMPLES



1 11/16" X 0.10 GALVANIZED STEEL PILE AND CAP

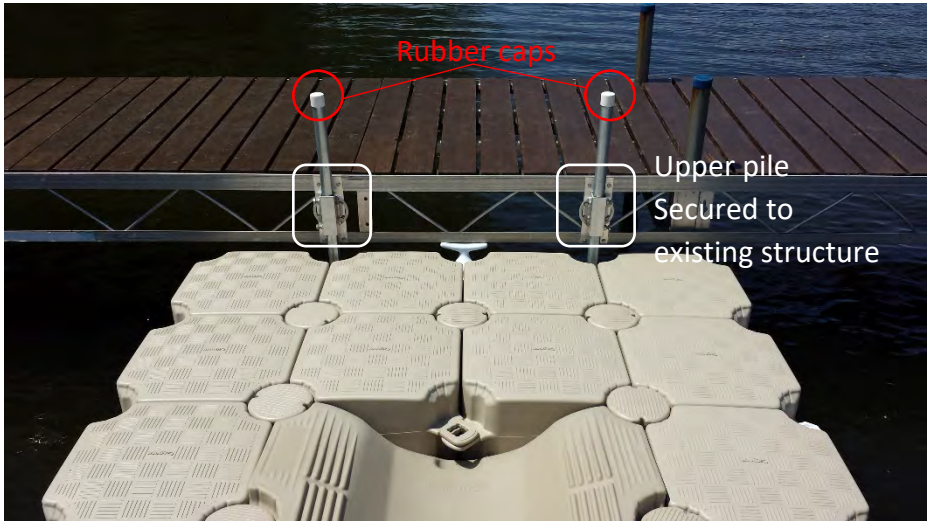

SPECIFICATIONS

Material/Composition: Galvanized steel
Needed tools: 1 11/16" pile driver and sledgehammer

SKU NUMBERS

PILE 1 11/16" X 0.10 GALVANIZED STEEL: C06-000034
1 11/16" RUBBER CAP: C06-000018

IMPORTANT PRINCIPLES

The below principles and notions apply the 1 11/16" piling system in general. The specifications of the combined products must remain unchanged. Outside diameters of the steel pile and the below guidelines are of the utmost importance to ensure the components' proper functioning.

UPPER SECTION OF THE PILE MUST BE SECURED TO EXISTING FIXED STRUCTURE: Candock provides a few alternatives to secure the top portion of the pile to a shore-fixed structure; see lower in this manual for details. Other accessories and hardware may also be acquired locally to perform the task.

PILE SUPPORT FOR 1 11/16" STEEL PILE

SHORESIDE PILE SUPPORT FOR 1 11/16" STEEL PILE

LOWER SECTION OF THE PILE MUST BE INSERTED IN THE SEABED OF AT LEAST 60cm (2'): See the 1 11/16" pile driver and sledgehammer instructions.

WATER DEPTH SHOULD NOT EXCEED 2.4m (8'): For the pile to provide sufficient rigidity, the pile's overall free span cannot exceed 2.4m (8').

VERTICALITY: All piles should be perfectly vertical after installation is complete. The use of a level is highly recommended.

PROTECTED ENVIRONMENT: Any Candock system that is to be anchored with our piling system should not be subjected to waves of more than 60cm (2'). Candock's piling system is extremely restrictive in the amount of leeway it will allow to the dock. Aggressive waters may translate to premature wear of the components.

CANDOCK'S PILES WORK IN PAIRS: Candock's piling system implies that the piles are to be configured in pairs; or more.

ADJUSTABLE PILE SUPPORT 2-7/8" - GALVANIZED



SPECIFICATIONS

Material/Composition: Galvanized steel
Needed tools: 2 7/8" pile driver, sledgehammer, 3/4" ratchet socket and wrench, proper tools and hardware to secure the pile support on the existing fixed structure.

SKU NUMBER

ADJUSTABLE PILE SUPPORT 2-7/8" GALVANIZED: C07-000007

IMPORTANT PRINCIPLES

The below principles and notions apply the ADJUSTABLE PILE SUPPORT 2-7/8" GALVANIZED. The specifications of the combined products must remain unchanged. Outside diameters of the steel pile and the below guidelines are of the utmost importance to ensure the components' proper functioning.

PILE SUPPORT MUST BE SECURELY BOLTED ON THE EXISTING STRUCTURE: Candock does not provide basic hardware; these should be purchased locally. A proper assessment of the existing structure is essential to ensure a strong assembly.

LOWER SECTION OF THE PILE MUST BE INSERTED IN THE SEABED OF AT LEAST 60cm (2'): See the 2 7/8" pile driver and sledgehammer instructions.

WATER DEPTH SHOULD NOT EXCEED 3m (10'): For the pile to provide sufficient rigidity, the pile's overall free span cannot exceed 3m (10').



VERTICALITY: All piles should be perfectly vertical after installation is complete. The use of a level is highly recommended.

PVC SLEEVE: All piles should be covered with a PVC sleeve and Cap to prevent the POST CUBES' premature wear.

PROTECTED ENVIRONMENT: Any Candock system that is to be anchored with our piling system should not be subjected to waves of more than 60cm (2'). Candock's piling system is extremely restrictive in the amount of leeway it will allow to the dock. Aggressive waters may translate to premature wear of the components.

CANDOCK'S PILES WORK IN PAIRS: Candock's piling system implies that the piles are to be configured in pairs; or more.

HDPE PILE GUIDE FOR 2 7/8" STEEL PILE

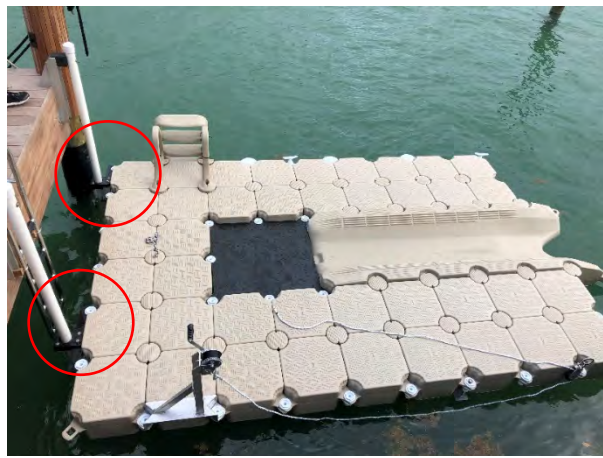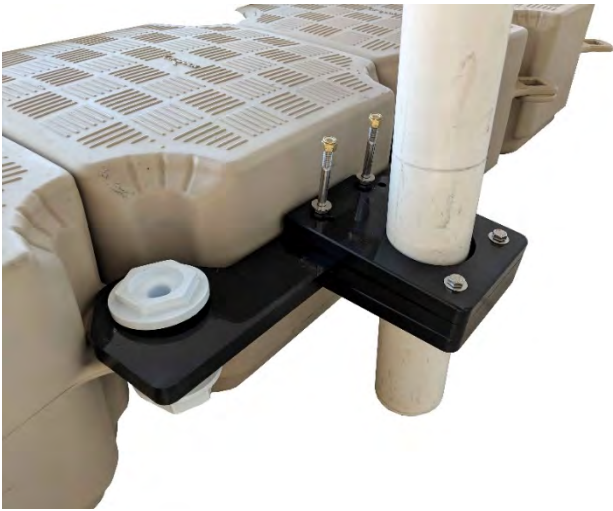

SPECIFICATIONS

Material/Composition: High-density polyethylene
Needed tools: 2 7/8" pile driver, sledgehammer, key for nut, but-saw or zip cut grinder, PVC glue, and 9/16" ratchet socket and wrench

SKU NUMBER

HDPE PILE GUIDE FOR 2 7/8 " STEEL PILE: C06-000008

IMPORTANT PRINCIPLES

The below principles and notions apply to the HDPE PILE GUIDE FOR 2 7/8" STEEL PILE. The specifications of the combined products must remain unchanged. Outside diameters, the steel pile, and the below guidelines are of the utmost importance to ensure the components' proper functioning.

UPPER SECTION OF THE PILE MUST BE SECURED TO EXISTING FIXED STRUCTURE: Candock provides a few alternatives to secure the top portion of the pile to a shore-fixed structure; see lower in this manual for details. Other accessories and hardware may also be purchased locally to perform the task.

- "Z" BRACKET FOR 2 7/8" STEEL PILE (16" AND 6")

- GALVANIZED STEEL ADJUSTABLE 2 7/8" STEEL PILE SUPPORT

LOWER SECTION OF THE PILE MUST BE INSERTED IN THE SEABED OF AT LEAST 60cm (2'); See the 2 7/8" pile driver and sledgehammer instructions.

WATER DEPTH SHOULD NOT EXCEED 3m (10'); For the pile to provide sufficient rigidity, the pile's overall free span cannot exceed 3m (10').

VERTICALITY: All piles should be perfectly vertical after installation is complete. The use of a level is highly recommended.

PVC SLEEVE: All piles should be covered with a PVC sleeve and Cap to prevent the HDPE guides' premature wear.


PROTECTED ENVIRONMENT: Any Candock system that is to be anchored with our piling system should not be subjected to waves of more than 60cm (2'). Candock's piling system is extremely restrictive in the amount of leeway it will allow to the dock. Aggressive waters may translate to premature wear of the components.

CANDOCK'S PILES WORK IN PAIRS: Candock's piling system implies that the piles are to be configured in pairs; or more.

TIPS

-Make sure to include the needed SPACERS if the tab configuration creates a void in the assembly

"Z" BRACKET FOR 2 7/8" STEEL PILE (16" AND 6")

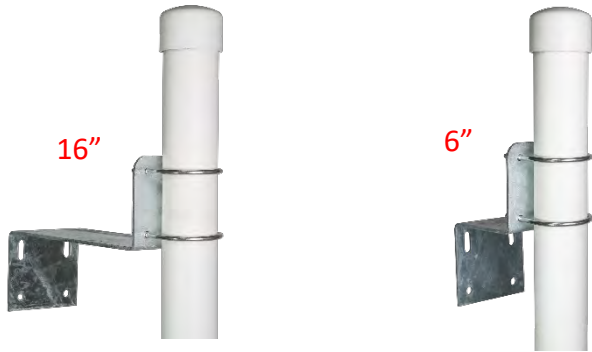

SPECIFICATIONS

Material/Composition: Galvanized steel

Needed tools: 2 7/8" pile driver, sledgehammer, 9/16" ratchet socket or wrench, proper tools, and hardware to secure the Z brackets on the existing fixed structure.

SKU NUMBERS

"Z" BRACKET FOR 2 7/8 " STEEL PILE (16") GALVANIZED STEEL: C07-000003

"Z" BRACKET FOR 2 7/8 " STEEL PILE (6") GALVANIZED STEEL: C07-000005

"Z" BRACKET FOR 2 7/8 " STEEL PILE (16") SS 316: C07-000004

"Z" BRACKET FOR 2 7/8 " STEEL PILE (6") SS 316: C07-000006

IMPORTANT PRINCIPLES

The below principles and notions apply the "Z" BRACKET FOR 2 7/8" STEEL PILE (16" AND 6"). The specifications of the combined products must remain unchanged. Outside diameters, the steel pile, and the below guidelines are of the utmost importance to ensure the components' proper functioning. The best option between the 16" and 6" depends on the desired application. Generally, if the combination includes a POST CUBE, the 16" model prevails. For any other combination, the 16" or 6" can work.

Z BRACKET MUST BE SECURELY BOLTED ON THE EXISTING STRUCTURE: Candock does not provide basic hardware; these should be purchased locally. A proper assessment of the existing structure is essential to ensure a strong assembly.

LOWER SECTION OF THE PILE MUST BE INSERTED IN THE SEABED OF AT LEAST 60cm (2'): See the 2 7/8" pile driver and sledgehammer instructions.

WATER DEPTH SHOULD NOT EXCEED 3m (10'): For the pile to provide sufficient rigidity, the pile's overall free span mustn't exceed 3m (10').


VERTICALITY: All piles should be perfectly vertical after installation is complete. The use of a level is highly recommended.

PVC SLEEVE: All piles should be covered with a PVC sleeve and Cap to prevent the POST CUBES' premature wear.

PROTECTED ENVIRONMENT: Any Candock system that is to be anchored with our piling system should not be subjected to waves of more than 60cm (2'). Candock's piling system is extremely restrictive in the amount of leeway it will allow to the dock. Aggressive waters may translate to premature wear of the components.

CANDOCK'S PILES WORK IN PAIRS: Candock's piling system implies that the piles are to be configured in pairs; or more.

PILE SUPPORT FOR 1 11/16" STEEL PILE

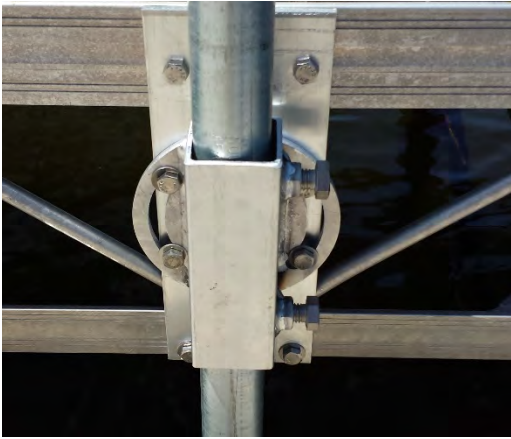

SPECIFICATIONS

Material/Composition: Aluminum

Needed tools: 1 11/16" pile driver, sledgehammer, 3/4" ratchet socket or wrench, proper tools, and hardware to secure the pile support on the existing fixed structure.

***The hardware of this product is made of stainless steel and brass. If you are installing this product in a salty environment, or if there is a risk of corrosion, replace brass components with stainless steel ones. Don't forget to apply anti-seize grease to the nuts.*

IMPORTANT PRINCIPLES

The below principles and notions apply the PILE SUPPORT FOR 1 11/16" STEEL PILE. The specifications of the combined products must remain unchanged. Outside diameters, the steel pile, and the below guidelines are of the utmost importance to ensure the components' proper functioning. These accessories allow for a wide array of applications, therefore, the list of possibilities is not elaborated. Nevertheless, the below principles apply. Please contact Candock or your local distributor to gather more insight on the potential application that Candock approves for these accessories.

PILE SUPPORT MUST BE SECURELY BOLTED ON THE EXISTING STRUCTURE: Candock does not provide basic hardware; these should be purchased locally. A proper assessment of the existing structure is essential to ensure a strong assembly.

LOWER SECTION OF THE PILE MUST BE INSERTED IN THE SEABED OF AT LEAST 60cm (2') *: See the 1 11/16" pile driver and sledgehammer instructions.

***EXCEPTIONS MAY APPLY DEPENDING ON APPLICATION, ENVIRONMENT, AND GEOMETRIES.**

WATER DEPTH SHOULD NOT EXCEED 2.4m (8'): For the pile to provide sufficient rigidity, the pile's overall free span cannot exceed 2.4m (8').

VERTICALITY: All piles should be perfectly vertical after installation is complete. The use of a level is highly recommended.


PROTECTED ENVIRONMENT: Any Candock system that is to be anchored with our piling system should not be subjected to waves of more than 60cm (2'). Candock's piling system is extremely restrictive in the amount of leeway it will allow to the dock. Aggressive waters may translate to premature wear of the components.

CANDOCK'S PILES WORK IN PAIRS: Candock's piling system implies that the piles are to be configured in pairs; or more.

SKU NUMBERS

PILE SUPPORT FOR 1 11/16" STEEL PILE MODULAR: C05-000040

A FEW EXAMPLES

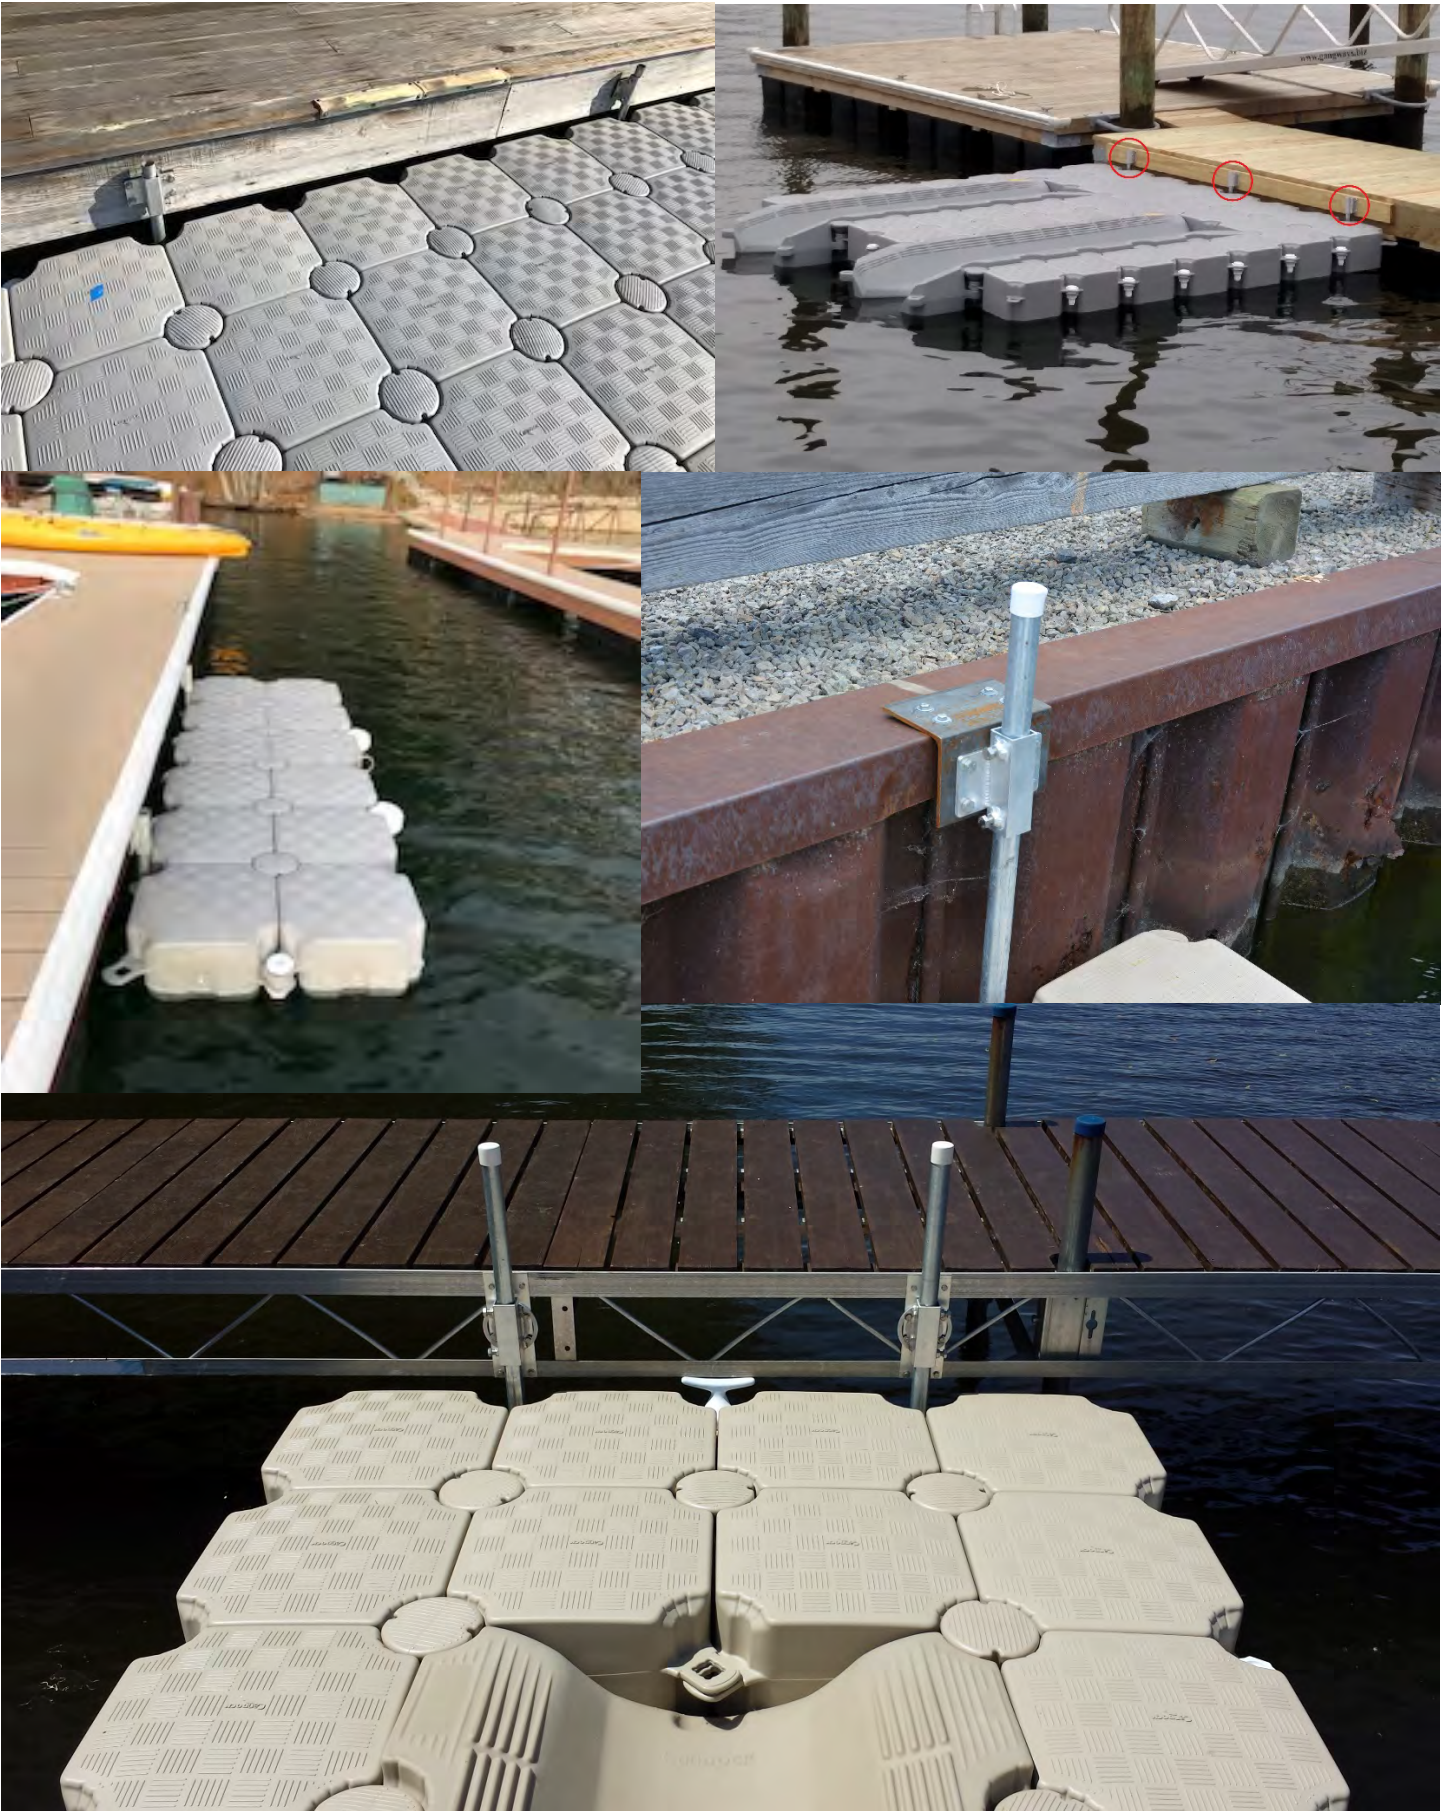

OTHER PILING ATTACHMENT OPTIONS

ADJUSTABLE PILE GUIDE FOR EXISTING PILES OF 15cm TO 38cm O/D (6" TO 15")



SPECIFICATIONS

Material/Composition: Stainless steel 316L and high-density polyethylene

Needed tools: Key for nut, zip cut grinder, long-nose pliers, and 17mm ratchet socket or wrench

*Bolt for cube and nuts not included.

SKU NUMBER

ADJUSTABLE PILE GUIDE FOR EXISTING PILES OF 15cm TO 38cm O/D (6" TO 15"): C06-000027

ASSEMBLY PROCEDURE

1-Using the two (2) needed BOLT FOR CUBE and NUTS, secure the stainless-steel mount onto the cube assembly.

2-Using the supplied hardware, fasten the adjustable 90 degrees "bumper" at the ideal position depending on the pile position.



3- Adjust the cable length and the number of rollers to optimize vertical movement while eliminating lateral movement. It is important to keep a small amount of play to allow the dock to move with the waves.

4- Tighten the NUTS on the cable clamp BOLTS firmly, alternating between them.

Proper hardware is already included in the bracket kit.



TIPS


-Make sure to include the needed SPACERS if the tab configuration creates a void in the assembly.

-Distance between each PILE & PILE GUIDE alongside the Candock should not exceed 7-9m (23-30ft)

*****IMPORTANT.**

This type of anchor requires a specific configuration for each project. Please refer to a CANDOCK technician to validate your anchorage.

PILE GLIDE ADAPTOR (CAROLINA WATERWORKS - ALUMINUM OR GALVANIZED STEEL)

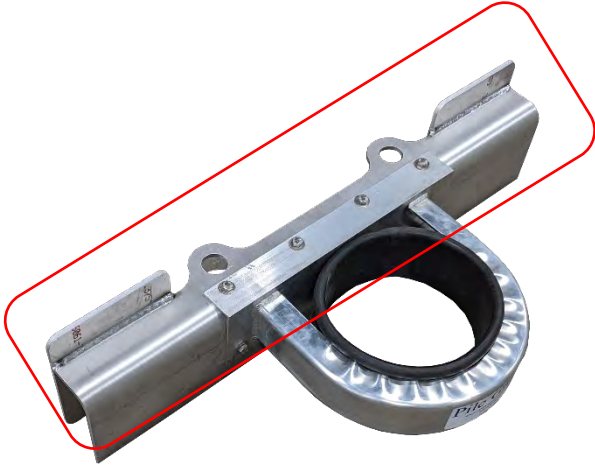

SPECIFICATIONS

Material/Composition: Aluminum or galvanized steel

Needed tools: Key for nut, and 1 1/8" ratchet socket and wrench

*Bolts for cube and nuts not included.

**Pile guide attachment not included, visit this website for more information <https://carolinawaterworks.com/>

SKU NUMBERS

PILE GLIDE ADAPTOR (CAROLINA WATERWORKS - ALUMINUM): C07-000001

ASSEMBLY PROCEDURE

1-Using the two (2) needed BOLTS FOR CUBE and NUTS, as well as the designated hardware, secure the PILE ADAPTOR mount onto the cube assembly.

2-Fasten the PILE GLIDE or other pile guide products onto the adaptor using adequate hardware. Candock does not provide any hardware; these should be purchased locally. A proper assessment of the selected pile guide is essential to ensure a strong assembly.


3-Firmly tighten all the hardware and NUTS onto the BOLTS FOR CUBE.

TIPS

Ensure that the pile's outside diameter is at least 15% smaller than the inside diameter of the chosen PILE GLIDE.

-Distance between each PILE & PILE GLIDE alongside the Candock should not exceed 7-9m (23-30ft)

ADJUSTABLE INTERNAL SQUARE PILE GUIDE WITH ROLLERS – SS 316

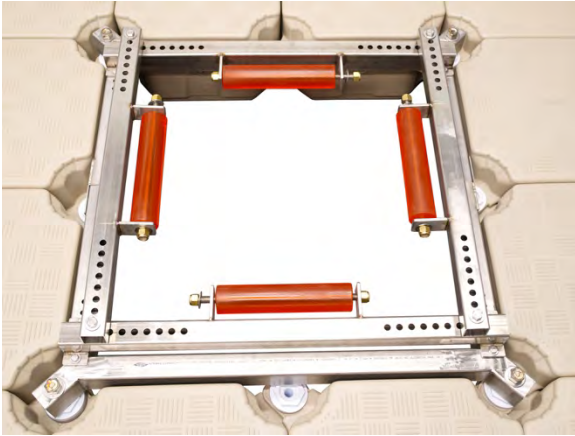

SPECIFICATIONS

Material/Composition: Stainless steel 316 (marine grade)
Needed tools: Wrenches for nuts, and 9/16", 3/4", and 1-1/8" socket wrenches.
*** Bolts for cube and nuts not included.**

SKU NUMBERS


ADJUSTABLE INTERNAL SQUARE PILE GUIDE WITH ROLLERS : C06-000075

IMPORTANT PRINCIPLES

The principles and concepts below apply to the **ADJUSTABLE GUIDE WITH ROLLERS**.

PRIMARY USE: This anchor is primarily designed for piles where top access is not possible. Being of a removable type, it can be installed around an existing, covered pile—for example, under a bridge or beneath a dock supported by concrete columns.

PILE DIAMETER LIMITATION: This anchor is equipped with multiple adjustment holes, allowing installation on piles of various diameters. When the pile is centered in the designated space, this anchor can accommodate diameters ranging from **12 inches (30 cm) to 21 inches (53 cm)**.

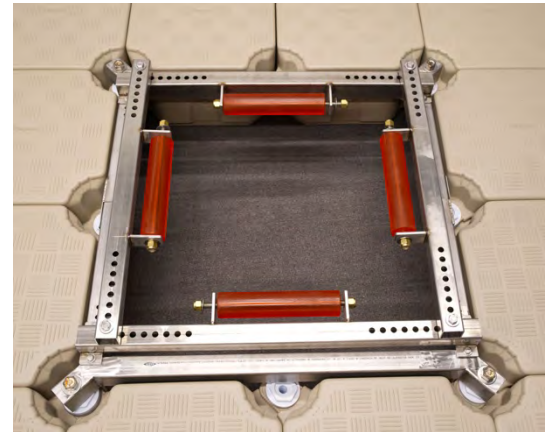


ASSEMBLY PROCEDURE


1-Once the dock is assembled around the pile, leave a gap of **four (4) cubes**, then install the **eight (8) white bolts and white nuts**. Make sure all bolts and nuts are positioned at the same height (**Tabs # 4**). Add **spacers** where necessary to achieve uniform alignment.

2- Assemble the structure into two (2) parts (the one that does not have rollers) and secure them using the eight (8) **3/8" x 3" bolts and nuts**. Place the nylon nuts inward. **Do not tighten for now.**




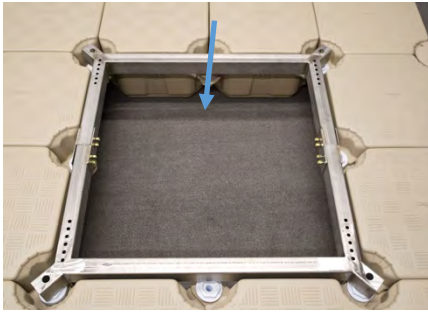


3- Insert the **threaded rods** into each corner to securely fasten the structure to the dock, with the welded head facing upward. Using two 1-1/8" wrenches (or sockets), tighten the nylon nuts until the assembly is firmly secured.

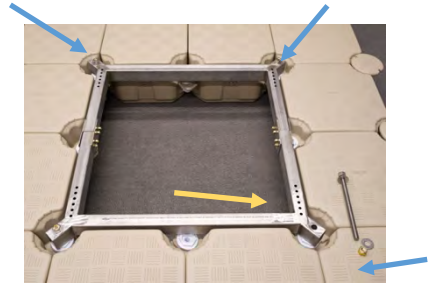


4-You can now tighten the eight (8) **bolts and nuts** of the structure using a wrench and a 9/16" socket.

5-Now install the side supports with rollers. Start with the # **1** models, which are longer and equipped with welded plates for fastening. Adjust them around the pile, leaving approximately 1 to 2 inches of clearance.

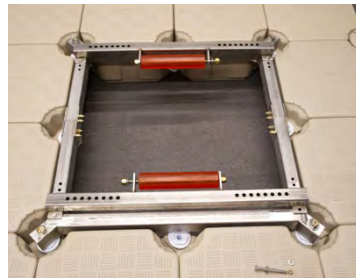

Secure with the eight (8) **bolts and nuts** 3/8 x 4 inches.

6- Now install the # **2** side supports with rollers. Adjust them in the same way as the previous ones, making sure to leave sufficient clearance of approximately **1 to 2 inches**. The four (4) **bolts and nuts** are larger; you will need a **3/4" wrench and socket**.

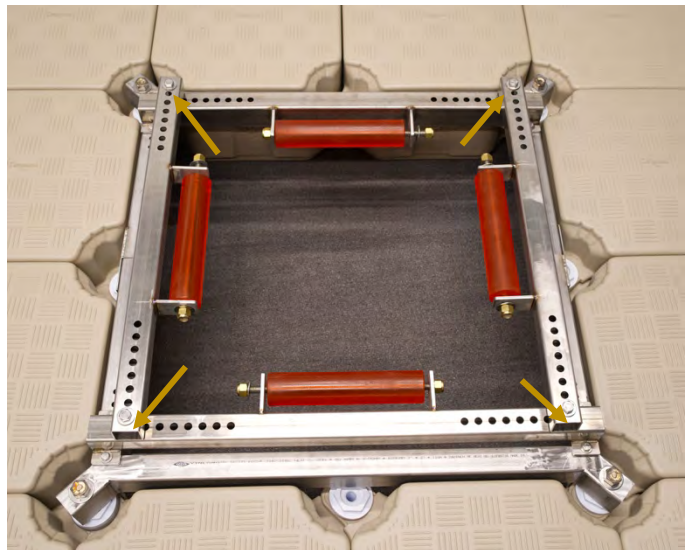

TIPS

When installing this anchor, it is recommended to choose a calm day with no waves to facilitate assembly and ensure precise positioning. The allowable diameter for each anchor may vary depending on the actual position of the pile, as it is unlikely that the pile will be perfectly centered between the four cubes. Since each pile is unique, it may therefore be necessary to adjust the rollers differently in each case.

UNDERWATER ANCHORING POINTS WITH ANCHOR LINES

INTRODUCTION


CANDOCK'S UNDERWATER ANCHORING SYSTEMS

The underwater anchoring points with anchor lines approach is also a widely employed technique. The anchoring of a floating dock using this technique impose fewer restrictions. There is a wide variety of options regarding the components and possibilities through a multitude of possible combinations. This technique can easily be broken down into three (3) separate categories of accessories:

1-Connecting mechanism to the floating dock

2-Anchor line


3-Anchoring point in the seabed, lakebed, or riverbed.

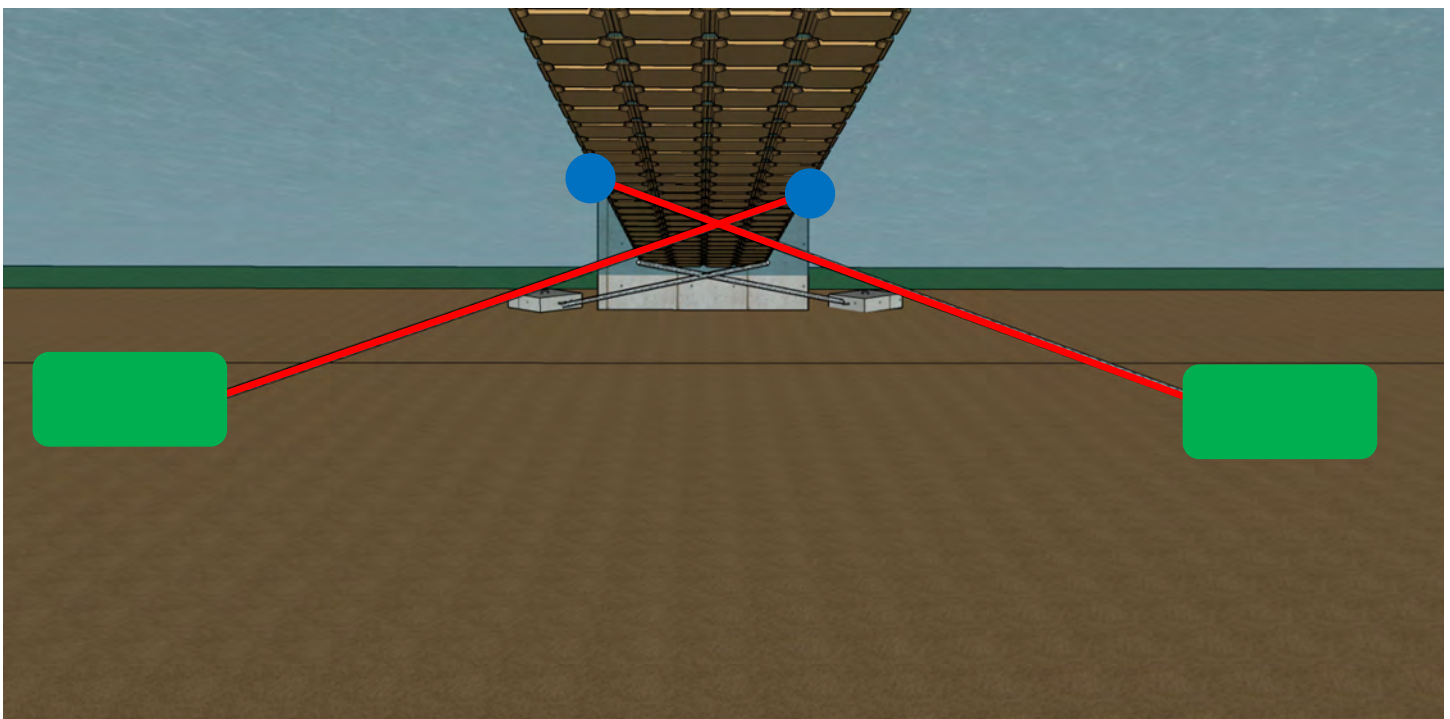

CANDOCK'S REGULAR ANCHORING METHOD AND ACCESSORIES

Candock has also developed its array of anchoring components. Due to our Modular Floating Dock systems' particularities, the market's readily available hardware and accessories were not sufficient. We have perfected and developed accessories for the three (3) categories mentioned above for the past two decades. Because of our floating dock systems' outstanding durability and resilience, each of the components has been designed to outperform any other floating dock system on the market. The flexibility and "energy-absorbing" nature of our systems have made Candock world-renowned for its unmatched durability and resilience.


CANDOCK'S "OPEN SEA" ANCHORING METHOD AND ACCESSORIES

Candock has also developed a **revolutionary anchoring approach** that sets the brand apart from its competitors. As our systems are extremely resilient, we've created a unique combination of accessories and techniques to develop the most robust and most resilient **OPEN SEA CONDITIONS** anchoring method available for a modular floating dock system like Candock. Look for the 3 Alpha signs () through the following sections to distinguish the related accessories.

***FOR THIS ANCHORING TECHNIQUE, IT IS HIGHLY RECOMMENDED THAT A QUALIFIED CANDOCK TECHNICIAN IS TO BE PRESENT DURING INSTALLATION TO SUPERVISE THE PROJECT.**

The below section elaborates on our systems' fundamentals while highlighting the best practices regarding this anchoring technique.

ANCHOR PLATE FOR CHAIN

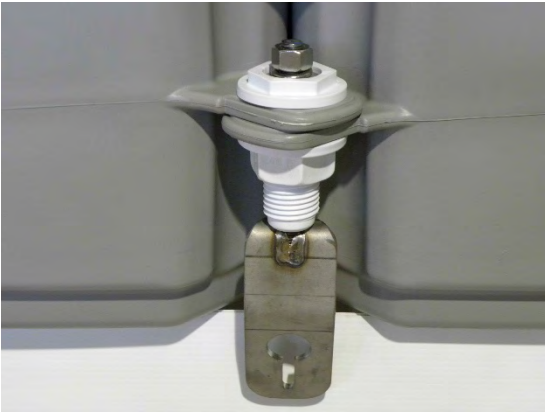

SPECIFICATIONS

Material/Composition: stainless steel 316

SWL: 975kg (2145 lbs.)

Needed tools: 1 1/8" ratchet socket or wrench.

*Bolt for cube and nut NOT included

**The hardware of this product is made of stainless steel and brass. If you are installing this product in a salty environment, or if there is a risk of corrosion, replace brass components with stainless steel ones. Don't forget to apply anti-seize grease to the nuts.

SKU NUMBER

ANCHOR PLATE FOR CHAIN: C06-000037

ASSEMBLY PROCEDURE

Insert the ANCHOR PLATE FOR CHAIN into the BOLT FOR CUBE and firmly secure it with the provided hardware.

TIP

Make sure to angle it in the desired direction before final tightening.

CONNECTING PIN WITH PIVOTING ANCHOR PLATE FOR CHAIN



SPECIFICATIONS

Material/Composition: High-density polyethylene resin, concrete and stainless steel 316
Available colors: Beige and Grey
SWL: 1334kg (2500 lbs)
Needed tools: Key for pin
***Sliding nut NOT included**

SKU NUMBERS

CONNECTING PIN WITH PIVOTING ANCHOR PLATE FOR CHAIN BEIGE: C06-000041
CONNECTING PIN WITH PIVOTING ANCHOR PLATE FOR CHAIN GREY: C06-000042

ASSEMBLY PROCEDURE

- 1-Disassemble the pivoting plate from the main shaft and set the **plate and dowel** aside.
- 2-Screw the connecting pin part at the desired location.
- 3-Laying belly down on the dock; reach down under the dock and reconnect the pivoting plate and dowel to the main shaft.

NOTICE

The CONNECTING PIN WITH PIVOTING ANCHOR PLATE FOR CHAIN has been designed to be installed on the edge of a Candock system with an EDGE CUBE perimeter. If you wish to install this anchoring accessory on a regular Candock system (no EDGE CUBE), you will most likely have to go in the water to complete the last step of the process.



CONNECTING PIN WITH ANCHOR RING FOR CHAIN (CONCRETE FILLED)



SPECIFICATIONS

Material/Composition: High-density polyethylene resin, concrete and stainless steel 316

Available colors: Beige and Grey

SWL: 1334kg (2500 lbs)

Needed tools: Key for pin

***Sliding nut NOT included**

SKU NUMBERS

CONNECTING PIN WITH ANCHOR RING FOR CHAIN (CONCRETE FILLED) BEIGE: C06-000039

CONNECTING PIN WITH ANCHOR RING FOR CHAIN (CONCRETE FILLED) GREY: C06-000040

ASSEMBLY PROCEDURE

1-Screw the CONNECTING PIN WITH ANCHOR RING FOR CHAIN (CONCRETE FILLED) at the desired location.

TIP

Since the connecting point with the anchor line is often located directly underneath the floating dock, the CONNECTING PIN WITH ANCHOR RING FOR CHAIN (CONCRETE FILLED) provides the advantage of potentially discouraging any malicious person from stealing your floating system.

“HOT DIPPED” GALVANIZED STEEL CHAINS



SPECIFICATIONS

Material/Composition: Hot-dipped galvanized steel

SKU NUMBERS

CHAIN GALVANIZED STEEL, 5/16", GRADE 30: C06-000021
CHAIN GALVANIZED STEEL, 3/8", GRADE 30: C06-000020
CHAIN GALVANIZED STEEL, 5/8", GRADE 30: C06-000022
CHAIN GALVANIZED STEEL, 7/8", GRADE 30: C06-000023

SHACKLES



SPECIFICATIONS

Material/Composition: Hot-dipped galvanized steel or stainless steel 316L.

Needed tools: Long-nose pliers for the lock pin and regular pliers to secure the nut.

SKU NUMBERS

SHACKLE GALVANIZED STEEL, 5/16", LOCK: C06-000028
SHACKLE GALVANIZED STEEL, 3/8", LOCK: C06-000028
SHACKLE GALVANIZED STEEL, 5/8", LOCK: C06-000030
SHACKLE GALVANIZED STEEL, 7/8", LOCK: C06-000031
SHACKLE STAINLESS STEEL 316, 3/8", LOCK: C06-000032
SHACKLE STAINLESS STEEL 316, 7/16", LOCK: C06-000033

ELASTIC ANCHORING CABLES (TMS)



SPECIFICATIONS

Material/Composition: Stainless steel 316 L eyelet, natural latex, and Polyester sheath

SWL: 455kg (1000lbs)

MBS: 3181kg (7000lbs)

Elasticity: ELASTIC ANCHOR ROPE 1m (3'): 2m stretch (6')
ELASTIC ANCHOR ROPE 2m (6'): 4m stretch (12')

Needed shackles: SHACKLE STAINLESS STEEL 316, 7/16", LOCK: [SKU # B0255](#)

[YOUTUBE](#)

SKU NUMBERS

ELASTIC ANCHOR ROPE 1m (3'): C06-000024

ELASTIC ANCHOR ROPE 2m (6'): C06-000025

IMPORTANT PRINCIPLES

The below principles and notions apply to Candock's ELASTIC ANCHORING CABLES (TMS). The addition of these cables on the anchor lines allows for the dock's optimal stability in every condition. Suppose the water levels are subjected to fluctuations (tidal or seasonal). In that case, our elastic cables' addition to the anchor lines allows for optimal tension in the lines at all water levels. Depending on the application, environment, and applied forces to the dock, a Candock representative will determine a precise configuration layout. The below guidelines demonstrate the basic principles and best practices when these TMS cables are included in your dock system. Also, see the below diagrams for explanations on the below principles.

FLUCTUATION AMPLITUDES: If expected water fluctuations are higher than 2m, we recommend using the 2m elastic cable. If fluctuations are lesser than 2m, we suggest using the 1m elastic cable.

TMS POSITION ON THE ANCHOR LINE: The TMS cables should always be included in the line's upper-mid section. It prevents potential damages to the cable from seabed debris while allowing the upper section to be adjusted onto the floating dock.

TMS INSTALLATION AND TENSION: The TMS final adjustments (tension in the anchor lines) should be performed at a low water level (low tide). It allows for optimal tension when water fluctuates. The exact tension in the cables is challenging to determine, so we highly recommend meticulous monitoring of the first fluctuation cycles.






INCREASED RESISTANCE TO STRETCHING: The TMS cables can also be paired or tripled on a given anchor line to provide more stretching resistance. Depending on the load applied and the amplitude of the fluctuations, a Candock representative must determine the proper configuration.

ONE PIECE CHAIN: The TMS cable should be installed on a single section anchor line. It implies that the chain between the 2 connecting points of the TMS on the chain must be as long as the maximal stretch of the chosen TMS cable length (2m for the 1m cable; 4m for the 2m cable).


ASSEMBLY PROCEDURE

1-Install TMS cables on all anchor lines before installing the connecting lines.

2-Use proper shackles depending on chain gauge and application



LINE CONFIGURATION

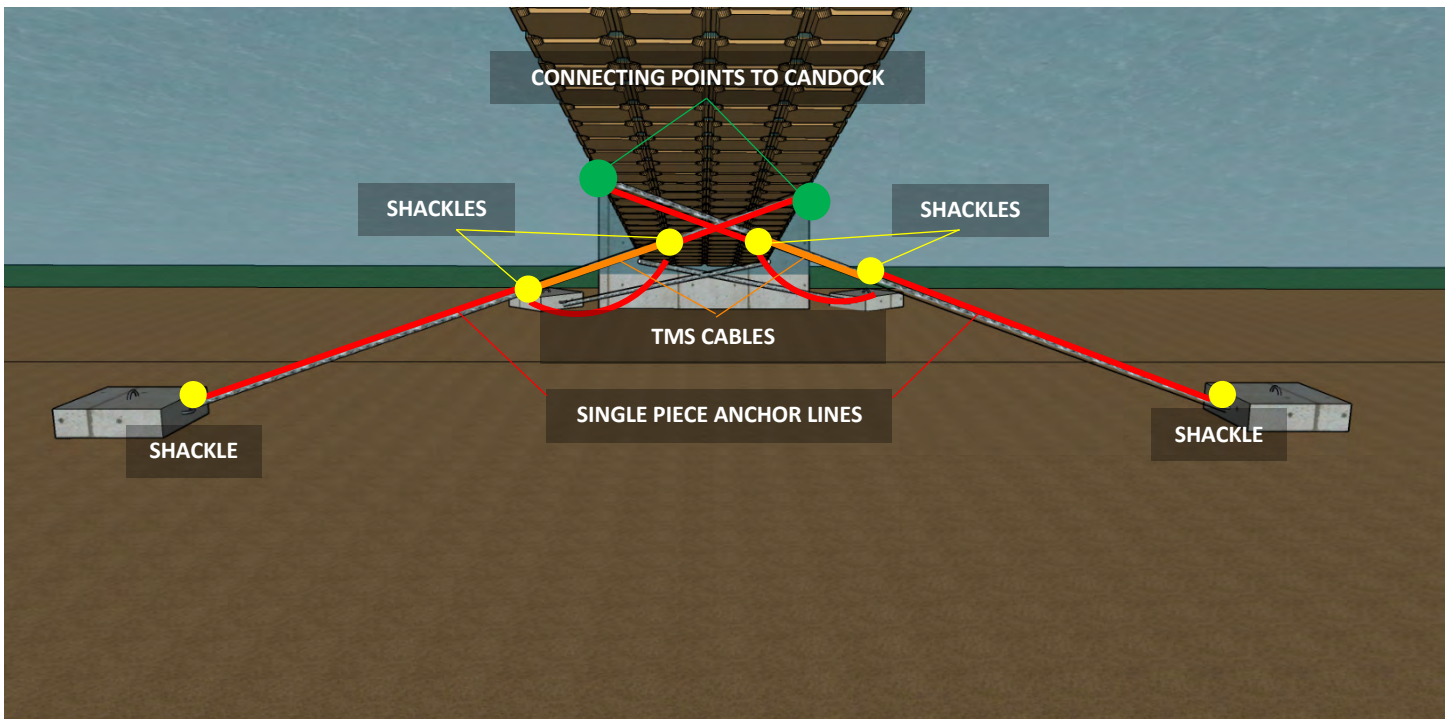

MISCELLANEOUS ANCHORING TECHNIQUES

In the miscellaneous category of techniques and accessories, there are multiple options. As a manufacturer, we developed tailored accessories and concepts. However, we kept in mind other alternatives available such as “custom-made” accessories or via third-party companies and marine contractors. The below list of accessories consists of our most often utilized accessories.

WALL ANCHORS AND EXTENSION PLATE FOR WALL ANCHORS



SPECIFICATIONS

Material/Composition: Stainless steel 316 or galvanized steel
Needed tools: Key for nut, 1 1/8” ratchet socket and wrench for the WALL ANCHORAGES and 3/4” ratchet socket and wrench for the EXTENSION PLATES and proper power tools and hardware to secure the wall anchorage and extension plate on an existing floating structure.

*Bolt for cube and nut included.

SKU NUMBER

WALL ANCHOR GALVANIZED STEEL:
WALL ANCHOR STAINLESS STEEL 316: C06-000009
WALL ANCHORING ANGLE PLATE: C06-000036

ASSEMBLY PROCEDURE

Simply insert the WALL ANCHOR onto the “pre-installed” BOLT FOR CUBE and NUT assembly using the provided hardware (bolt, washers, and nut). Secure by firmly tightening the nut onto the bolt.

IMPORTANT NOTICE

-Wall anchors are strictly to connect a Candock system onto another type of **floating dock**.


-Connection point onto the other type of floating dock must provide a flat, sturdy, and robust surface from 10cm (4”) over the waterline up to 20cm (8”) to allow for the mounting plate to be securely fastened to the existing floating dock.

If the existing dock's freeboard height is higher than the Candock system, include an EXTENSION PLATE FOR WALL ANCHORAGES, which provides additional leeway for adjusting the WALL ANCHOR proper height. The plate allows for a freeboard height of 60cm (24”) at the most.

-When purchasing the EXTENSION PLATE FOR WALL ANCHORS, the needed hardware to secure the WALL ANCHOR onto the plate is included in the packaging.

-Wall anchors are to be installed in pairs; or more.

A FEW EXAMPLES

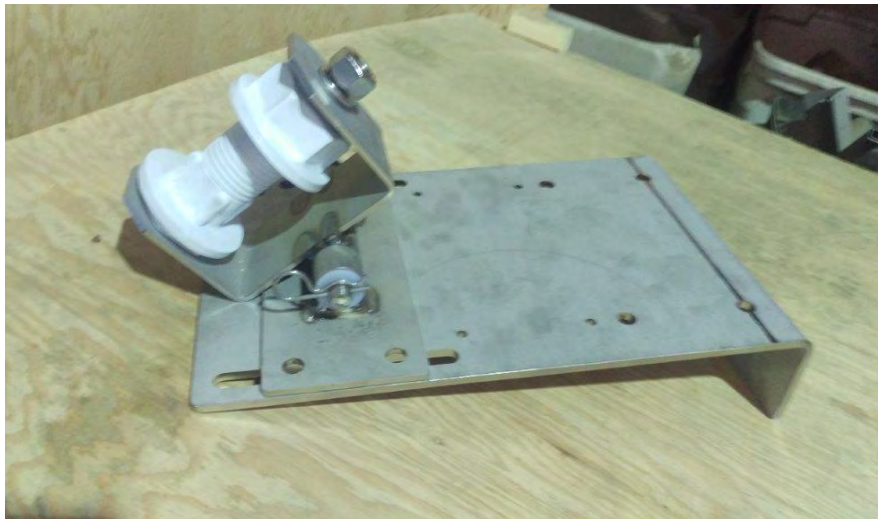

SWIVEL ANCHOR CHANNEL FOR JETROLL



SPECIFICATIONS

Material/Composition: Galvanized steel

Needed tools: 7/32" Allen Key and proper power tools and hardware to secure the "channel" on an existing floating structure.

SKU NUMBER

SWIVEL ANCHOR CHANNEL GALVANIZED STEEL: C07-000002



ASSEMBLY PROCEDURE

- 1-Secure the "claw" piece of the bracket onto the JetRoll using the provided hardware.
- 2-Determine adequate height of the "channel" piece onto the existing floating structure and firmly secure it using adequate hardware.
- 3-Link the 2 pieces of the bracket using the dowel and hairpin.

IMPORTANT NOTICE

- Swivel anchor channels are strictly to connect a JetRoll unit onto another type of **floating** dock.
- Connection point onto the other type of floating dock must provide a flat, sturdy, and robust surface to allow the "channel" to be securely fastened to the existing floating dock.
- Swivel anchor channels are to be installed in pairs.

SLIDING ANCHOR H-BEAM

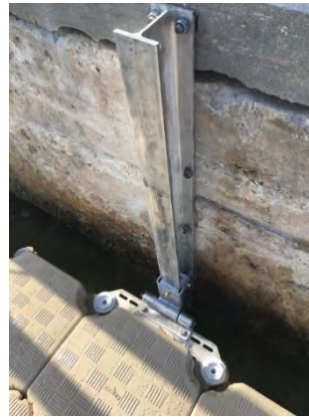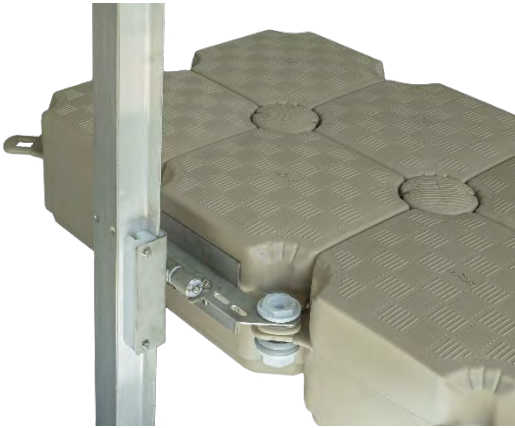

SPECIFICATIONS

Material/Composition: Aluminum and stainless steel 316 L

Dimensions: H-Beam length: 304.8cm (10')

Needed tools: Key for nut, 3/4" ratchet socket and wrench, and adapted tools and hardware to secure the "H" BEAM onto the shoreline structure

SKU NUMBER

SLIDING ANCHOR H-BEAM STAINLESS STEEL: C06-000006

SLIDING ANCHOR H-BEAM ALUMINUM: C06-000007

IMPORTANT PRINCIPLES

The below principles and notions apply to Candock's SLIDING ANCHOR H BEAM.

FLUCTUATION AMPLITUDES: We suggest installing SLIDING ANCHOR H BEAM that allows the fluctuation amplitudes of the environment it is installed in.

AT LEAST 60% OF THE OVERALL LENGTH OF THE H BEAM MUST BE SECURED ON THE SHORELINE'S STRUCTURE.

The bottom portion of the H Beam may not be possible to secure onto the face of the existing structure (seawall), but we recommend at least 60% of its length well secured onto the seawall.

VERTICALITY: All H beams should be perfectly vertical after installation is complete. The use of a level is highly recommended.

PROTECTED ENVIRONMENT: Any Candock system that is to be anchored with our SLIDING ANCHOR H-BEAM should not be subjected to waves of more than 60cm (2'). The Candock's piling system is extremely restrictive in the amount of leeway it will allow to the dock. Aggressive waters may translate to premature wear of the components.

CANDOCK'S SLIDING ANCHORAGE H-BEAM WORK IN PAIRS: Candock's H beam system implies that the beams are to be configured in pairs; or more.

A FEW EXAMPLES



© V-ROLL DRYDOCK SYSTEM

BASIC CONCEPTS OF THE V-ROLL SYSTEM

The V-ROLL dry dock system consists of an assembly of several components. First and foremost, the V-CUBE. This is the central component used in several dry dock systems that Candock can provide. Depending on the size and specifications of the watercraft, a range of additional components may be required to ensure a safe and efficient system.

The information below is essential for every V-ROLL SYSTEM that will be proposed / offered:

MAKE – MODEL NAME – YEAR OF MANUFACTURE – ENGINE LAYOUT AND SPECIFICATIONS

The V-CUBE is made of high-density polyethylene (the same material as our cubes), making it extremely durable. It is equipped with roller slots to ensure the watercraft can enter and exit smoothly.

Depending on the length and weight of the watercraft, Candock will determine the appropriate configuration of required components. V-CUBES, CUBES, CONNECTING PINS, and SLIDING NUTS, to name just a few, are all part of the formula used to create a dry dock system perfectly suited to your watercraft.




There are basic but essential rules and premises to ensure a functional system:

- 1- THE CONFIGURATIONS PROPOSED IN THIS MANUAL MAY BE MODIFIED WITH THE APPROVAL OF A CANDOCK REPRESENTATIVE.**
- 2- CERTAIN BOATS (STEPPED HULLS, V-DRIVE/DIRECT-DRIVE) ARE NOT COMPATIBLE WITH THE V-ROLL SYSTEM.**
- 3- USERS MUST BE PROFICIENT IN OPERATING SUCH A SYSTEM.**
- 4- CANDOCK IS NOT RESPONSIBLE FOR DAMAGES RESULTING FROM FAILURE TO FOLLOW THE GUIDELINES BELOW.**

V-ROLL SYSTEM COMPONENTS



V-Cube

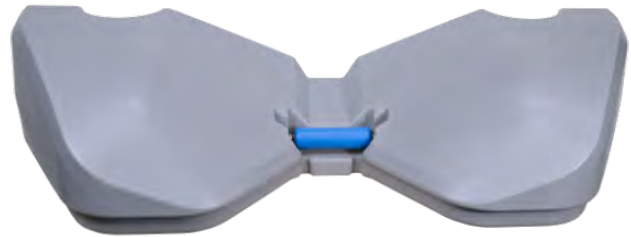

ENTRY CUBE

USEFUL LINKS AND RESOURCES:

[YouTube](#)

[Website](#)

TABS POSITIONS

	#6
	#5
	#4
	#3
	#2
	#1
	#0
	#-1
	#-2

SPECIFICATIONS

Material/Composition: High-density polyethylene resin

Available colors: Beige, Grey

Dimensions : V-CUBE - L x L : 96 cm (38 in) x 48 cm (19 in) H : 36 cm (14 in)

ENTRY CUBE - L x L : 142 cm (56 in) x 51 cm (20 in) H : 36 cm (14 in)

Weight : V-CUBE - 12 kg (26 lb)

ENTRY CUBE - 11,5 kg (25 lb)

Needed tools: G2 key for pin, Key for nut

SKU NUMBER

V-CUBE BEIGE: C02-000053

V-CUBE GREY: C02-000052

ENTRY CUBE BEIGE: C02-000055

ENTRY CUBE GREY: C02-000054

TERMINOLOGY


V-CUBE TABS : The tabs on the **V-CUBE** correspond to number 5, which is the highest position in the assembly system. This configuration allows the **V-CUBE** to be installed in any direction, providing great layout flexibility. It is also possible to remove a **V-CUBE** without having to disassemble the surrounding standard cubes.

ENTRY CUBE TABS : The tabs on the entry cube correspond to position -2, which is the lowest level of the assembly system. This allows the entry cube to be assembled with an Edge cube configuration just as easily as with regular cubes. The tabs are also threaded, eliminating the need for a sliding nut.


FOR ASSEMBLY, we use the same principles as for standard cubes: connecting pins, black nuts, as well as spacers to fill in the missing tabs.

VENT PLUGS : These watertight plugs are always located on the side of the **V-CUBE**. Equipped with a breathable membrane, these plugs act as pressure relief valves, preventing deformation of the **V-CUBE** caused by temperature changes and pressure variations. In addition, these plugs prevent condensation from forming inside the **V-CUBE**.

OVERVIEW

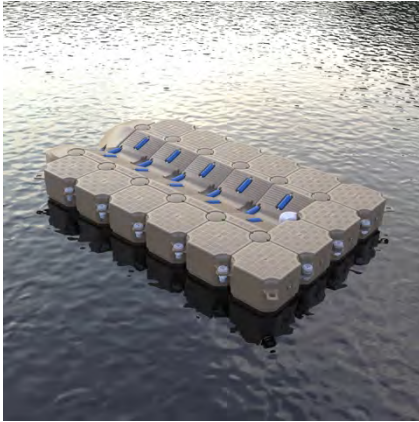

SMALLEST V-ROLL CONFIGURATION (PERSONAL WATERCRAFT)

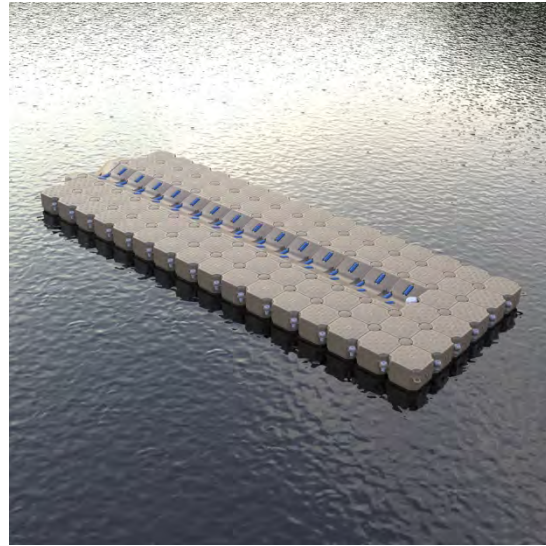

LONGEST V-ROLL CONFIGURATION (28FT BOAT)
THIS CONFIGURATION MAY NOT BE SUITABLE FOR ALL BOATS

ASSEMBLY PROCEDURE

BEFORE INSTALLATION

- 1- Assemble on a flat surface rather than in water.
- 2- Assemble the cubes around the **V-cubes**. If you attach it to an existing Candock dock, make sure the plugs are in the same direction as the dock. If your **V-Roll system** is an independent unit, the cube vent caps should be facing the front of the system.



PROCEDURE :

- 1- Place two rows of **regular cubes** on each side for a system intended for a boat, or a single row on each side if it is intended for a personal watercraft.
- 2- Install the **sliding nuts** on each side, always on the lowest tab.



- 3- Begin the assembly with 2 **V-CUBES**. These will be placed over the tabs of the standard cubes.
- 4- Use spacers in the appropriate locations to ensure all missing gaps are properly filled.
- 5- Secure the **V-CUBES** using **connecting pins**.

6- Repeat steps 3, 4 and 5 depending on the number of V-cubes required for your installation.

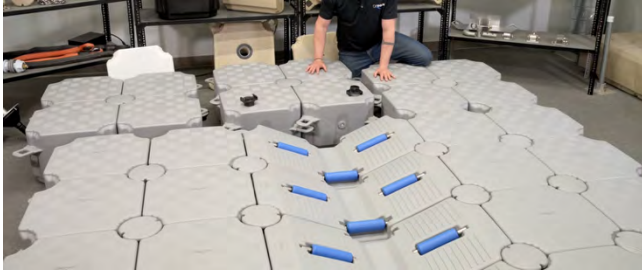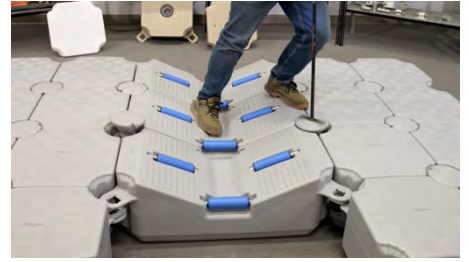

7- Once all the V-cubes are assembled, you can proceed with the assembly of the front section of the system. For boats, a minimum of two rows of cubes is required, whereas for personal watercraft (PWC), a single row is sufficient. Assemble everything using the connecting pins, sliding nuts, and spacers as needed.

8- Install the entry cube. This requires five spacers and one long connecting pin on each side. Both tabs of the entry cube correspond to number -2; therefore, ensure that the spacers are positioned in the correct locations. Since the entry cube tabs are already threaded, no sliding nuts are required.



9- To finalize the installation, install white bolts around the entire perimeter of the system. These are essential to ensure a solid and durable installation.

10- Adding a bow stop is recommended to protect your watercraft's hull. Since the space between the cube tabs and the V-cube is very limited, using the white nut is not possible. However, the bumper can be easily installed by pushing it directly into the tabs.

NOTE

For spacer count, the dock designer bases the calculation on the configuration requiring the most spacers (which is 3 spacers per V-Cube). However, in many cases, you will only need 2 per V-Cube. It is therefore normal to have unused spacers left over in some configurations.

USING A WATERCRAFT WITH THE V-ROLL

IMPORTANT NOTICE

The water depth at the rear of the system (entry point) must be at least 1 m (3.3 ft) to avoid damaging the propeller and the motor fin.

DRIVING THE BOAT ONTO THE SYSTEM

PWC : Approach the V-ROLL at idle speed, keeping the watercraft straight and centered with the entry cube. When the bow is in contact with the entry cube, give short bursts of throttle to align the PWC with the V-ROLL. Once it is aligned with the V-ROLL, accelerate gradually to drive onto the system. After a few tries, you will have a better idea of the amount of throttle required to reach the final position on the V-ROLL.

BOAT : The engine must be in "neutral" during entry procedures. Gradually increase throttle power until the boat is entirely on the V-ROLL. When the motor comes into contact with the entry cube, you will feel the watercraft stop. This indicates that the boat is in its final position. Entering the unit at high speed can damage the device. We recommend starting at slow speeds until you find the right pace. If the boat drives onto the system but does not fully reach its final position, you can continue to gradually increase power until it is completely in place. Be careful; boarding the V-ROLL at high speed can be dangerous.

NOTE : It is recommended to secure the watercraft to a cleat to prevent it from accidentally sliding into the water. The boat can be locked to the V-ROLL system with a CONNECTING PIN WITH SECURITY CHAIN. See further down in this manual.

LAUNCHING FROM THE V-ROLL

PWV : To return to the water, push the PWC backward 30-60 cm (1' to 2') to shift the machine's weight toward the rear of the system (near the pivot point). Next, stand at the back of your PWC, take hold of the seat handle, and transfer your weight toward the rear. The simplest way to push the PWC backward is to grab the front of the PWC with one hand and the handle with the other, then push gently. Be vigilant because there will come a point where your PWC will want to roll off on its own. At this stage, you must board it if you do not want it in the water without you.


BOAT: Lower the engine completely and put it in reverse. Gradually increase acceleration until the watercraft begins to roll off on its own. It may be necessary to use a strong burst of throttle to initiate the movement, then reduce acceleration.

NOTE: For boats equipped with a jet engine, a BOAT WINCH is required to initiate the launching process with the vessel. See further down in this manual.

WARNINGS AND SPECIAL INSTRUCTIONS

- 1- For all V-ROLL systems, it is important that the environment is not exposed to waves exceeding 90 cm (36 inches). We strongly advise installing a V-ROLL system in a protected area.
- 2- Installing multiple PWCs side by side is possible, but we recommend a minimum of 2 rows of CUBES between each V-cube. An installation with only one row is also possible, but there are risks of injury to users and damage to the PWCs.
- 3- Lifting (crane) multiple assembled V-cubes is strongly discouraged.
- 4- Riveted aluminum hulls may scratch the surface of the V-cubes.
- 5- Stepped-hull boats as well as "v-drive" or "direct-drive" engine configurations are not compatible with the V-ROLL system.
- 6- Please note that some boats have engine cooling air intakes on the hull and may overheat if the boat is dry-docked on the system with the engine running.
- 7- Always ensure that boats and PWCs are moved completely to the front of the V-ROLL system.
- 8- Surfaces can be slippery when the system is wet.

SITIFFENING BEAM

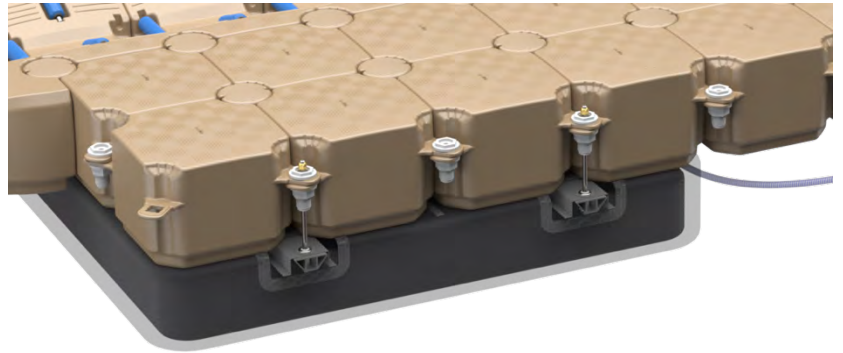

SPECIFICATIONS

Material/Composition: Aluminum and stainless-steel rods.

Needed tools: 1 1/8" ratchet socket and wrench

*Bolt for cube and nut NOT included.

**The hardware of this product is made of stainless steel and brass.

If you are installing this product in a salty environment,

or if there is a risk of corrosion, replace brass components with stainless steel ones. Don't forget to apply anti-seize grease to the nuts.

SKU NUMBERS

STIFFENING BEAM 115" (6 CUBES): C02-000032

STIFFENING BEAM 153" (8 CUBES): C02-000033

CONCRETE FILLED FIXING PIN G2 FOR STIFFENING BEAM - BEIGE): C03-000047

CONCRETE FILLED FIXING PIN G2 FOR STIFFENING BEAM - GREY): C03-000048

ASSEMBLY PROCEDURE

PRIOR TO INSTALLATION

1- Assemble STIFFENING BEAMS when the V-ROLL system is in the water.

2- Position the STIFFENING BEAMS precisely at the designated location according to the recommendations of your Candock distributor.

PROCEDURE

1- Insert the threaded rods into the ends of the STIFFENING BEAMS. While holding each end of the threaded rods (two people are required), pass the STIFFENING BEAM under the cubes and the V-cubes, starting from the rear of the system. If you have several BEAMS to install, proceed progressively from the front to the rear of the system (e.g., starting with beam #4 through to #1)

2- Once aligned, secure the STIFFENING BEAM to the BOLT FOR CUBE using the hardware kit supplied with the bars. Insert the threaded rods through the BOLT FOR CUBE, then manually engage the washers, lock washers, and nuts. If you install a STIFFENING BEAM with EDGE CUBES, you must use the CONCRETE FILLED PIN G2 FOR STIFFENING BEAM.


3- Finish the installation by adjusting the beam positions so they are perfectly perpendicular to the V-cubes. Over-tightening the stiffening beams can put pressure on the tabs and damage the cubes.

TIP

-The number of SITIFFENING BEAM needed for a specific configuration can be estimated with the report below:

(1x) STIFFENING BEAM FOR EVERY 455 kg (1000 lb) OF BOAT WEIGHT (maximum 4 beams)

Example: A 910kg (2000lb) "total weight" boat would need 2 sets of BEAMS (e.g. #1 and #2 beams. We add the beam #3 for a 3000 lb boat and #4 for boats 4000 lb and more).

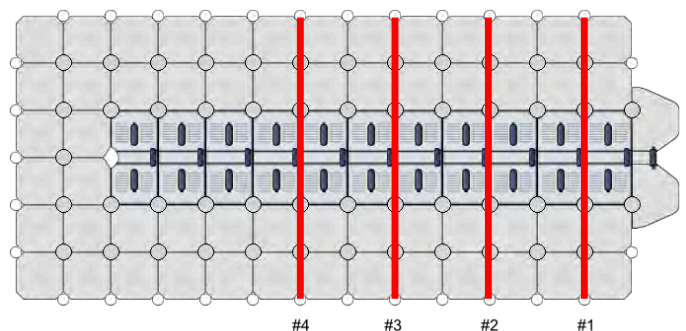

GUIDELINES FOR V-ROLL SYSTEM CONFIGURATION (FOR BOATS)

The following section is of critical importance for Candock. Correct **V-Roll system** configuration for boats is vital to ensure long-term durability and optimal performance. Adhering to the recommendations and guidelines below is essential for the product to function as intended.


Given the wide variety of boat sizes and models, the configurations listed below **may require adjustment** on a case-by-case basis. Please contact a Candock representative to assist you in determining a valid and approved configuration for your specific watercraft.

To better assist our customers, we have developed a comprehensive table to help determine the required configuration based on the two most significant variables: **boat length and weight**.

IMPORTANT NOTICES



The V-Roll boat system is designed to accommodate a boat weighing up to a **maximum of 3000 lb**, including the hull, engine, fuel, and onboard equipment. With the addition of the **AirLift 6500**, this limit **increases to 6500 lb**.

- Watercraft with "V-Drive" and "Direct-Drive" engine configurations are not compatible with the V-ROLL system.
- Boats with a "step-hull" design are not compatible with the V-ROLL system.
- For the installation of multiple systems side-by-side, it is required to maintain a minimum **buffer zone of five cubes** between the rear sections. This space is necessary to allow the system to settle adequately during boat launching and boarding maneuvers. This space can be filled (if needed) using EDGES cubes, as illustrated in the example below


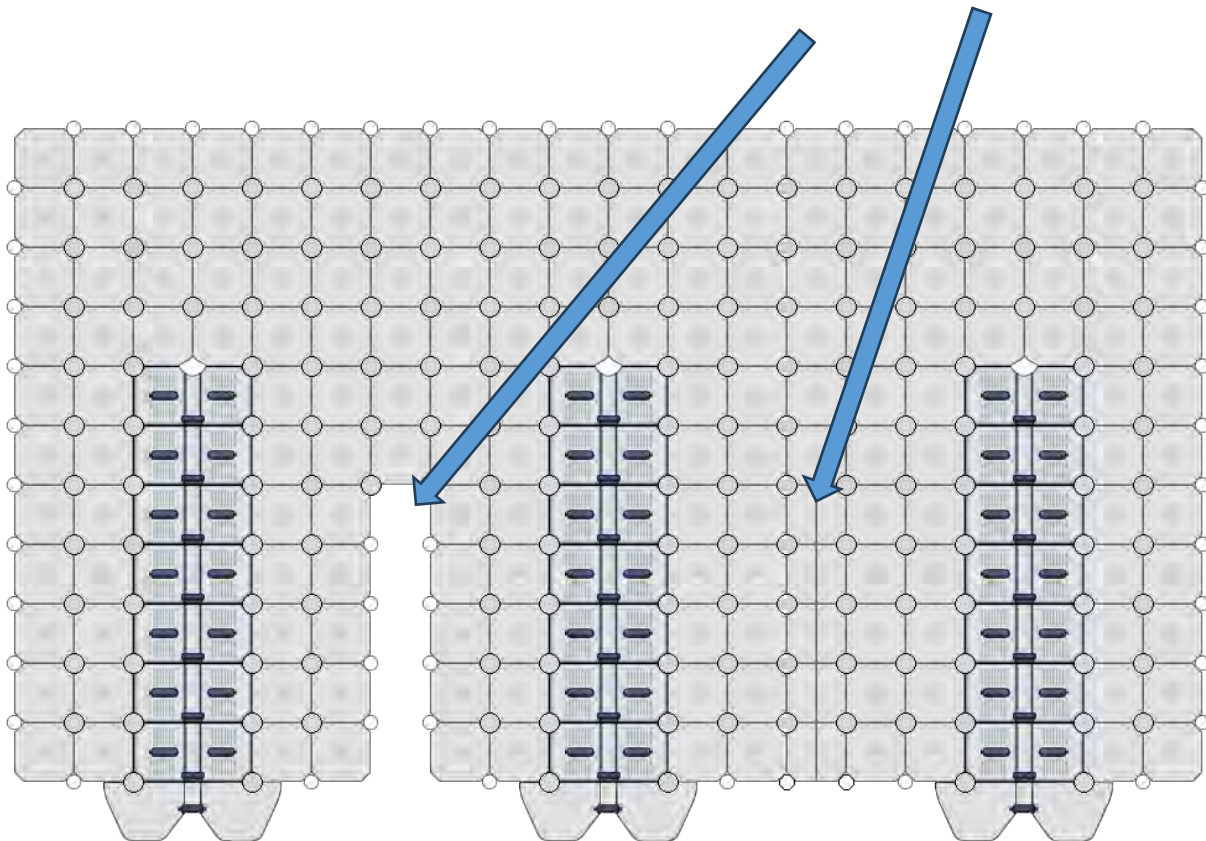


WEIGHTS AND DIMENSIONS - CONFIGURATION CHART


VESSEL LENGHT		VESSEL WET WEIGHT		V-CUBE	AirLift 6500	STIFFENING BEAM 6 CUBES
METRIC (M)	IMPERIAL (FT)	METRIC	IMPERIAL	-	-	-
0 - 3 m	0 - 10 ft	< 320 kg	< 700 lb	5	-	-

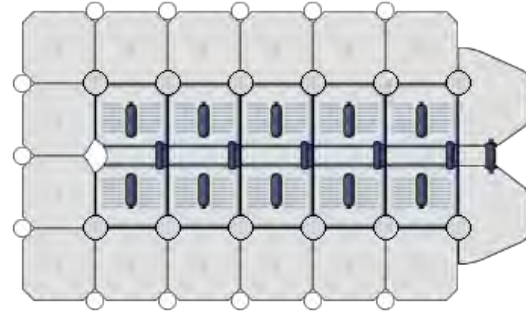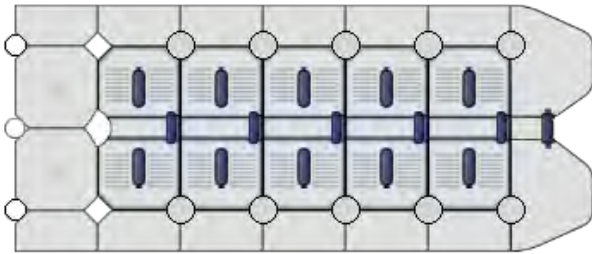

VESSEL LENGHT		VESSEL WET WEIGHT		V-CUBE	AirLift 6500	STIFFENING BEAM 6 CUBES
METRIC (M)	IMPERIAL (FT)	METRIC	IMPERIAL	-	-	-
0 - 3,5m	0 - 11,5 ft	< 565 kg	< 1150 lb	5 to 6	-	-

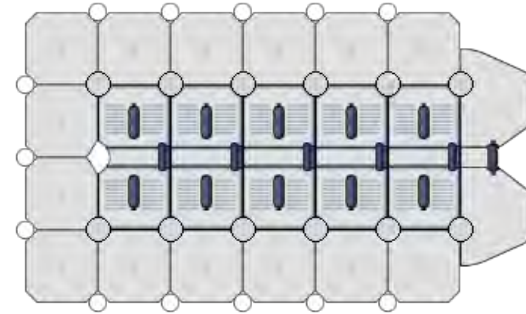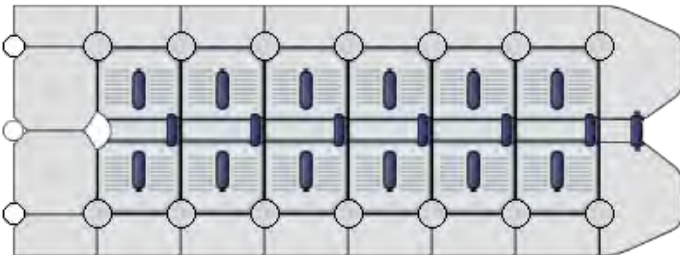


VESSEL LENGHT		VESSEL WET WEIGHT		V-CUBE	AirLift 6500	STIFFENING BEAM 6 CUBES
METRIC (M)	IMPERIAL (FT)	METRIC	IMPERIAL	-	-	-
0 - 3,5m	10 - 13 ft	< 565 kg	< 1150 lb	6	-	-

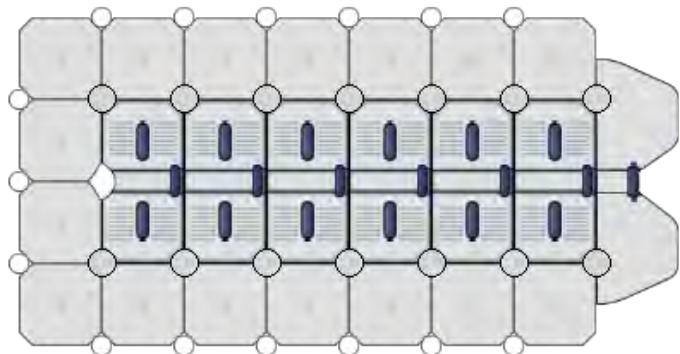


For configurations involving **multiple PWCs** installed in series, please allow for an additional number of cubes to maintain a safe distance between each watercraft.

In the example below, a length of approximately 13 V-cubes, in addition to the entry cube, would be required. This configuration is provided for reference only (based on 11-foot PWCs). It is important to validate the required dimensions based on the specific PWC model(s) being used.

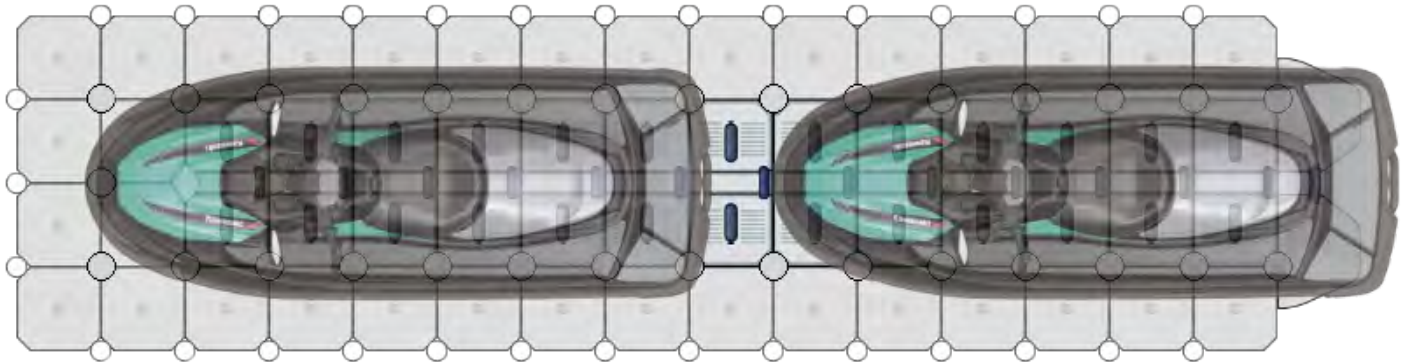


For multiple PWC configurations installed side-by-side, the following layout is suggested for a 10-foot space:


- Install one row of EDGE cubes around the perimeter and one row of regular cubes between the V-cubes.
- It is also recommended to use EDGE cubes for the center of the two rows indicated by the [arrows](#). These EDGE cubes act as a pivot point, providing the necessary flexibility for both systems to move independently.

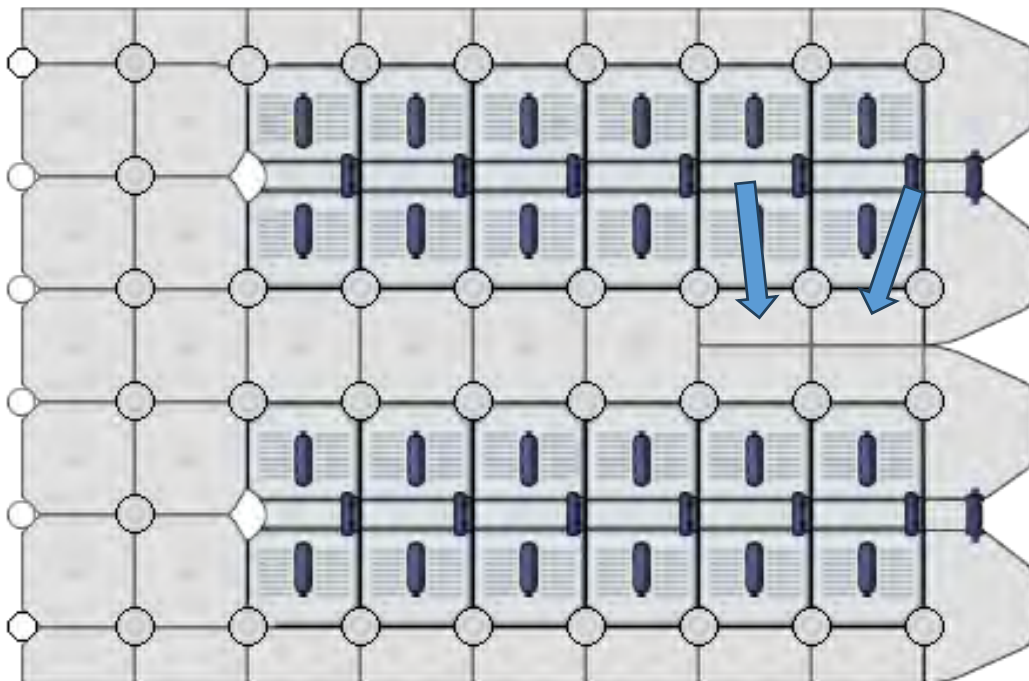


VESSEL LENGHT		VESSEL WET WEIGHT		V-CUBE	AirLift 6500	STIFFENING BEAM 6 CUBES
METRIC (M)	IMPERIAL (FT)	METRIC	IMPERIAL	-	-	-
4,5 – 5,5m	14,5 - 18 ft	350 - 600 kg	800 – 1300 lb	8	-	0 to 1

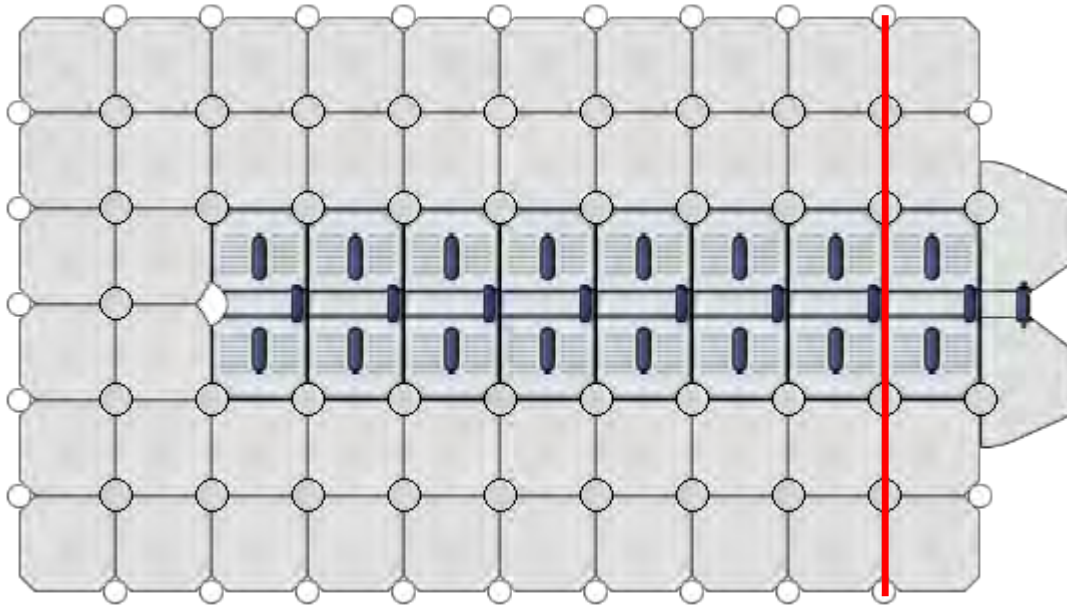


VESSEL LENGHT		VESSEL WET WEIGHT		V-CUBE	AirLift 6500	STIFFENING BEAM 6 CUBES
METRIC (M)	IMPERIAL (FT)	METRIC	IMPERIAL	-	-	-
4,5 – 5,5m	14,5 - 18 ft	550 - 1100 kg	1200 – 2500 lb	8	-	1 to 2

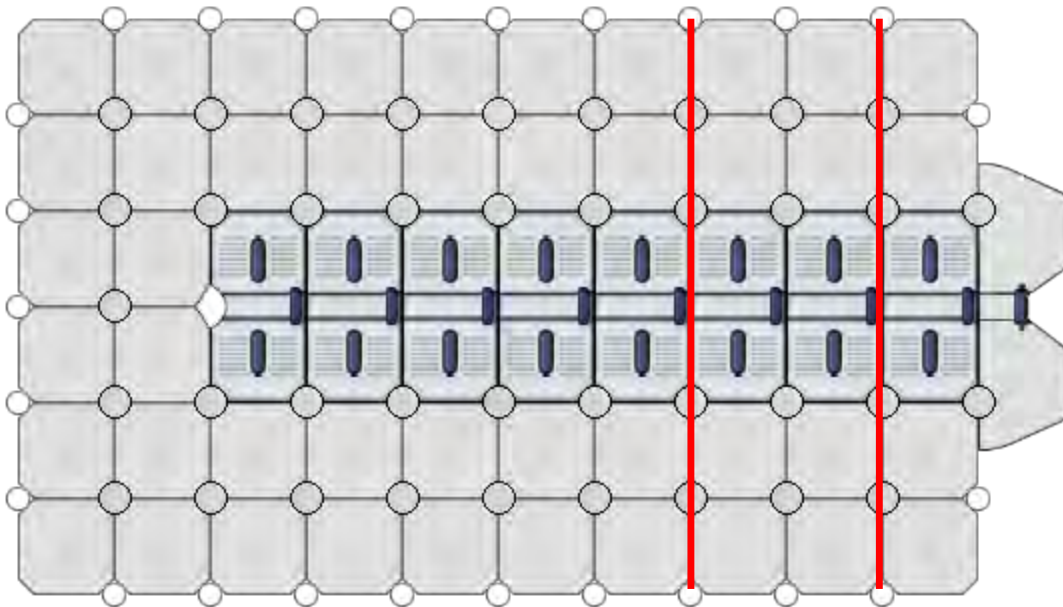


VESSEL LENGHT		VESSEL WET WEIGHT		V-CUBE	AirLift 6500	STIFFENING BEAM 6 CUBES
METRIC (M)	IMPERIAL (FT)	METRIC	IMPERIAL	-	-	-
5,5 – 6,5m	19 - 23 ft	550 - 1100 kg	1200 – 2500 lb	11	-	1 to 2

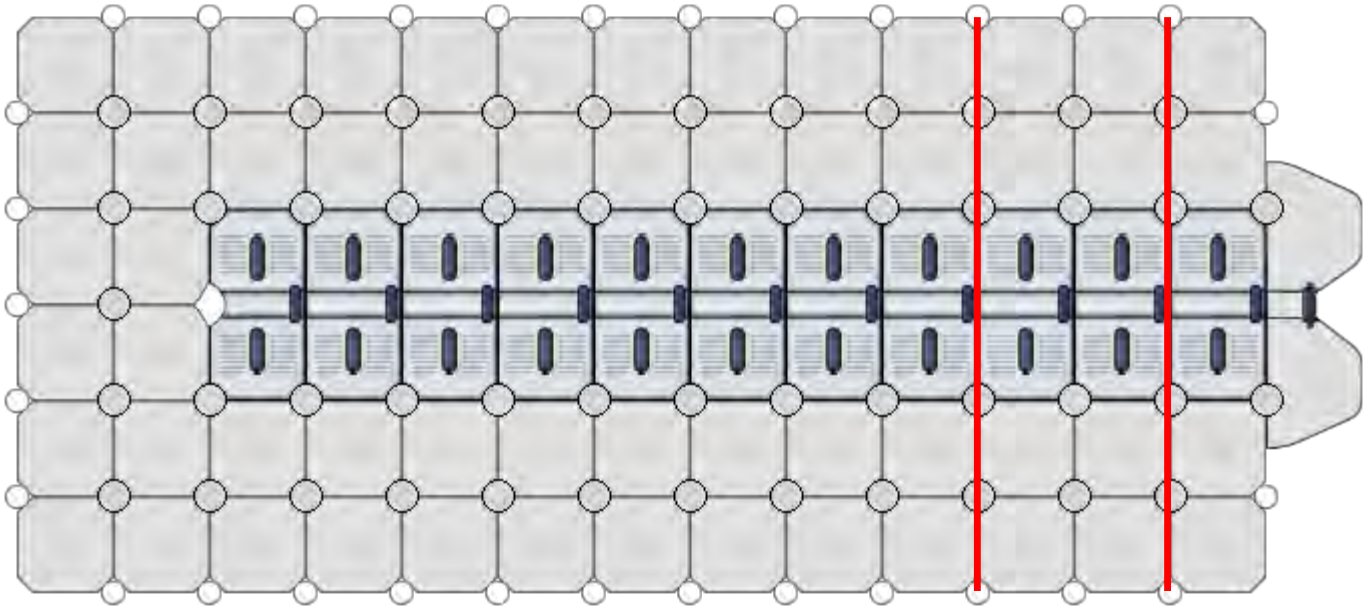


VESSEL LENGHT		VESSEL WET WEIGHT		V-CUBE	AirLift 6500	STIFFENING BEAM 6 CUBES
METRIC (M)	IMPERIAL (FT)	METRIC	IMPERIAL	-	-	-
5,5 – 6,5m	19 - 23 ft	1300 - 3000 kg	3000 – 6500 lb	11	1	3 to 4

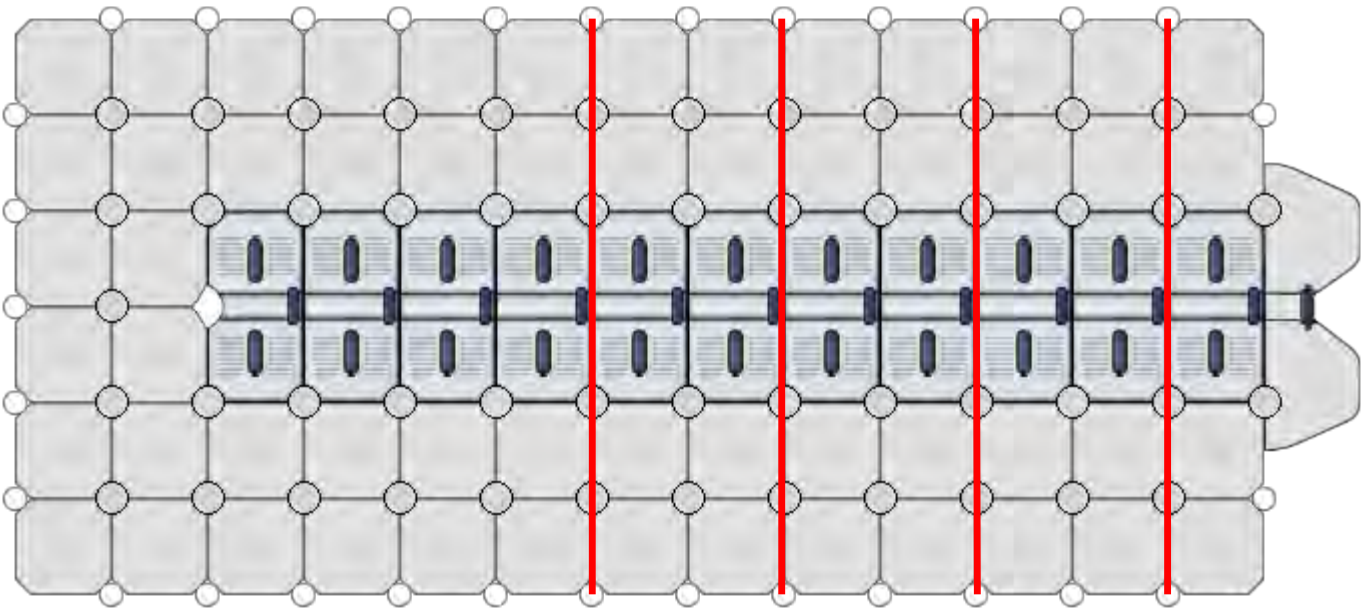

VESSEL LENGHT		VESSEL WET WEIGHT		V-CUBE	AirLift 6500	STIFFENING BEAM 6 CUBES
METRIC (M)	IMPERIAL (FT)	METRIC	IMPERIAL	-	-	-
7,5 – 8,5m	25 - 28 ft	550 - 1100 kg	1200 – 2500 lb	14	-	1 to 2

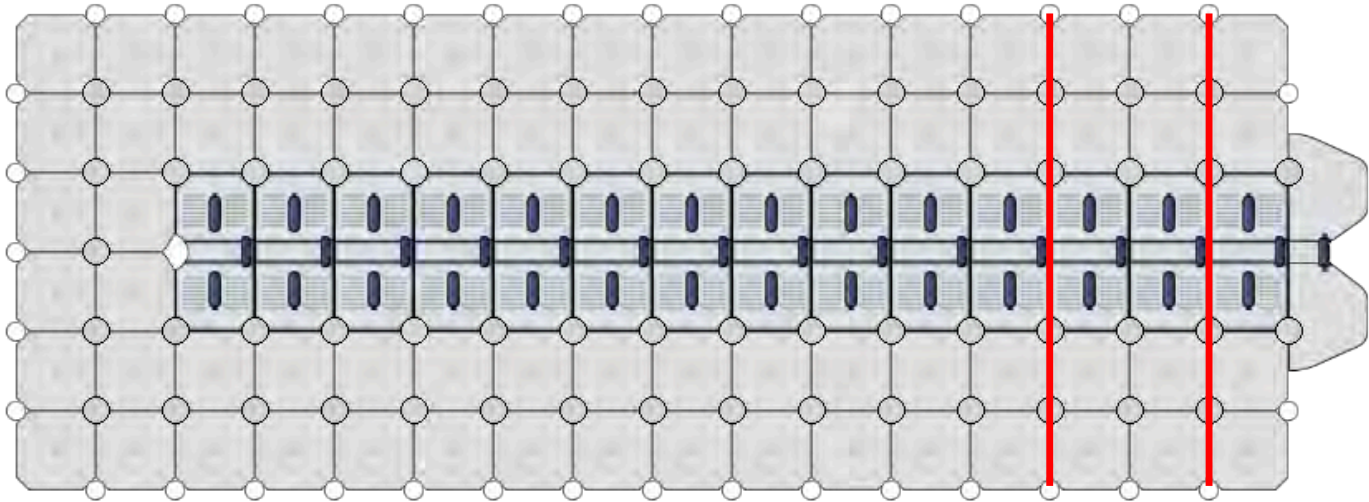

VESSEL LENGHT		VESSEL WET WEIGHT		V-CUBE	AirLift 6500	STIFFENING BEAM 6 CUBES
METRIC (M)	IMPERIAL (FT)	METRIC	IMPERIAL	-	-	-
7,5 – 8,5m	25 - 28 ft	1300 - 3000 kg	3000 – 6500 lb	14	1	3 to 4

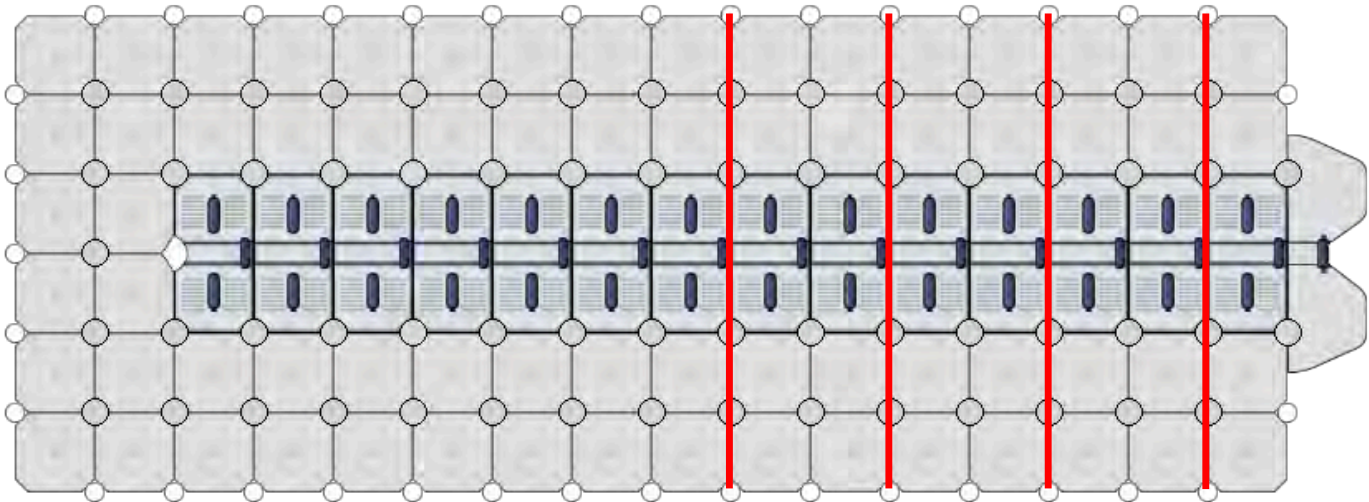

AIRLIFT 6500 SYSTEM



SPECIFICATIONS

Material/Composition: PVC bag, stainless steel hardware. 316, and Oxford fabric protective cover

Needed tools: Calf wrench for securing stiffening beams.

*The AirLift requires 2x 115-inch (6 cubes) stiffening beams. **They are not included.**

SKU NUMBERS

AIRLIFT 6500 SYSTEM : C02-000044

STIFFENING BEAMS (6 CUBES): C02-000032

DRYDOCK POSITIONING INDICATOR: C02-000058

ASSEMBLY PROCEDURE

PRIOR TO INSTALLATION

- 1- Make sure you have the space to unfold the AirLift bag and put it in the water.
- 2- Ensure the bag valve is closed to prevent water from entering the bag.

PROCEDURE

- 1- Once the bag is deployed, insert the two stiffening beams into the designated pockets. These beams will keep the bag in position. Ensure they are properly centered to maintain access to the eyelets intended for the threaded rods
- 2- Connect the blue hose to the bag. Before tightening, apply Teflon tape to the threads to ensure a watertight connection. Keep the other end of the hose dry and avoid any water ingress inside.
- 3- Before placing the bag in the water and securing it, verify whether your installation requires additional stiffening beams based on the weight of the watercraft. If necessary, it is recommended to install them prior to positioning the bag.
- 4- Positioning the bag requires two people. You can place the bag in the water at the system entrance, then slide it underneath the cubes. If the installation is performed out of the water, ropes can be attached to the mounting eyelets at the four corners to facilitate handling and help keep the bag in position.
- 5- Insert the threaded rods into the stiffening beams (with the welded head facing downward), then insert them into the white bolts located on the perimeter of the dock. Using the provided hardware, secure the stiffening beams by tightening them gradually and alternately on each side. It is important that the beams remain parallel to the cubes to ensure optimal system performance.
- 6- Once the bag is properly installed and secured, proceed with the installation of the white fiberglass control box. This unit can be mounted directly to your Candock using the included connecting pins, or installed on an independent structure. Please take the length of the blue hose (30 ft / 9 m) into consideration when choosing the location.
- 7- After securing the control box, connect the other end of the hose to it. The hose is not pre-assembled with the PVC fittings to allow for a custom fit. Position the hose next to the fitting where it will be screwed on, then mark the cutting point. We recommend leaving approximately 30 cm (1 ft) of slack. To install the PVC fitting, the end of the hose must be softened. The simplest and safest method is to submerge the end of the hose in a cup of boiling water for about 10 seconds. Next, slide on

the stainless steel hose clamp, then insert the PVC fitting. Once the fitting is firmly in place, tighten the clamp. You can then connect the hose to the control box.

8- To supply power to the control box, two options are available:

a. **110V Power Nearby**

If a 110V power source is available nearby, you can run an extension cord under the dock using our tile system, then route the power to the control box. Two designated openings are located underneath the box for this purpose.

b. **Battery and Inverter**

In the absence of a direct electrical supply, the control box can be powered using a 110V inverter connected to a 12V battery. Our recommendations are as follows:

- i. For the battery, we recommend a deep-cycle battery offering good peak power (minimum 800 CCA), group 24 or 27 depending on the desired runtime.
- ii. The system requires approximately 900 W of power. Although a 1000 W inverter may suffice, we recommend a 1200 W model or higher to optimize system performance and durability. **The inverter must be a PURE SINE WAVE inverter**

AIRLIFT 6500 USER GUIDE

DRIVING THE BOAT ONTO THE SYSTEM

- For driving the boat on the V-Roll system, please refer to the procedure described earlier in this manual.
- Once the boat is properly positioned on the system, you may activate the AirLift system using the remote control. For standard operation, select option #3 to open the valve and activate the air pump simultaneously.
- Depending on the weight of the watercraft, the lifting time may vary between 30 seconds and 1 minute 30 seconds.
- When the boat is completely clear of the water, you can deactivate the system by selecting option #3 "OFF," which will simultaneously close the valve and shut off the air pump.
- If necessary, the valve and the pump can also be controlled independently. For instance, if the lift bag becomes overinflated, you can reduce the air volume by opening only the valve using button #2 on the remote control.
- To assist with boat positioning, the **DRYDOCK POSITIONING INDICATOR** can be installed to provide a precise and consistent visual reference.
- It is crucial to always secure the boat with one or two mooring lines when it is left unattended or when you depart from the dock. These lines serve as a safety measure in the event of a bag failure.

LAUNCHING FROM THE V-ROLL

- Begin by detaching the mooring line(s).
- Next, open the valve using button #2 "ON" on the remote control to allow the bag to deflate. The deflation process can take up to approximately 2 minutes.
- It is highly recommended that the captain remains on board the boat during the launching phase to be able to react quickly should the watercraft begin to roll back into the water on its own.
- Once the bag is completely deflated and the boat's engine is running, gradually reverse the watercraft until it is completely clear of the system.

TIP

The distribution of passengers on board can have a significant impact on docking and launching maneuvers.

We recommend positioning passengers toward the front of the watercraft when driving onto the V-Roll system, and having them move toward the rear during the launching phase. This weight distribution helps optimize the boat's balance and ensures smoother operations.

CUBE DRILLING GUIDE


To reduce friction on the boat's hull, we have determined that the best solution is to decrease the buoyancy of the system when used in conjunction with our AirLift system. Although drilling holes into new cubes may seem counterintuitive, using drilled cubes offers several advantages: smoother operation, enhanced passenger safety, reduced stress on the anchoring system, and significantly softer contact with the boat's hull.

The drilling guide provided below is based on our current observations and testing. It may be adjusted over time based on additional information and feedback gathered from our customers and distributors.

For boats up to 23 feet

It is recommended to drill the following cubes;


- 3 V-cubes
- 2 regular cubes

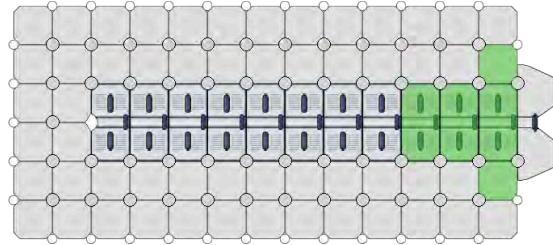

For boats from 24 to 28 feet

It is recommended to drill the following cubes;

- 3 V-cubes
- 4 regular cubes

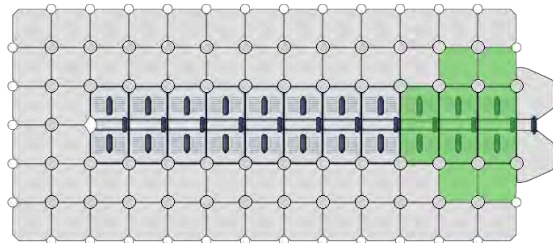


PROCEDURE FOR DRILLING THE CUBES

Holes **A**

Drill two 2-inch (5 cm) diameter holes in the bottom of the cubes, one hole on each side.

Holes **B**

Then drill four 3/8-inch (1 cm) holes in each of the top corners of the cube. These holes will be virtually invisible once the connecting pins are installed.

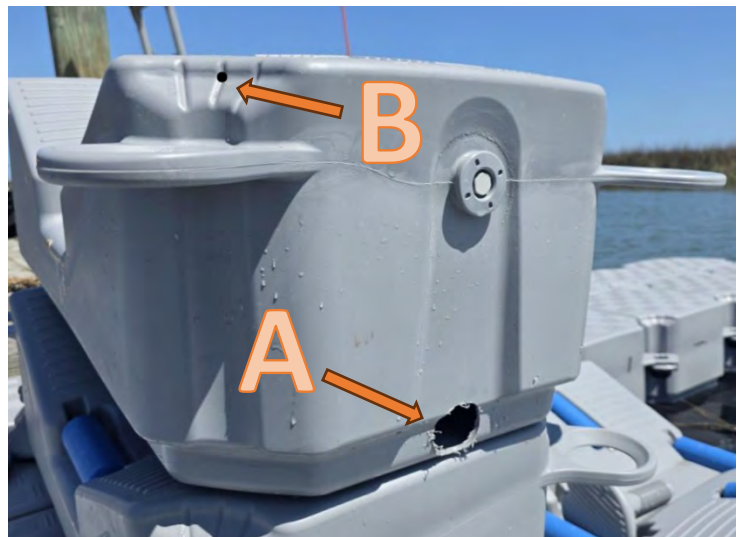

◎ JETSLIDE DRY-DOCK SYSTEM

JETSLIDE SYSTEM BASIC CONCEPTS

The JETSLIDE dry-dock system consists of an assembly of multiple components. First and foremost, the JETSLIDE unit itself. It is the center part of any drive-on dry-dock system that Candock can provide. Depending on the vessel's size and specifications, an array of additional components is required to ensure a safe and efficient system.

The below information is essential information for every JETSLIDE SYSTEM that is to be considered/offered:

MAKE NAME (BRAND) – MODEL NAME – YEAR OF MANUFACTURING – ENGINE LAYOUT AND SPECIFICATIONS

Consisted of a single piece of medium density polyethylene, with 100% of its interior filled with expanded polystyrene, the JETSLIDE is virtually unsinkable. Furthermore, as it does not have any mobile parts, it relies on its "low friction" soft surface to help your vessel going up and down from the system itself.


Depending on the boat's length and weight, Candock will determine a suitable configuration of the needed components. JETSLIDE, CUBES, CONNECTING PINS, and SLIDING NUTS, to name a few, are all part of the recipe to create a perfectly tailored dry-dock system for your vessel.



There are some basic yet essential rules and premises to ensure a functional system:

- 1- CANDOCK'S PROPOSED CONFIGURATION SHOULDN'T BE ALTERED IN ANY WAYS.**
- 2- CERTAIN BOATS (STEPPED HULL, V-DRIVE/DIRECT-DRIVE) ARE NOT COMPATIBLE WITH THE JETSLIDE SYSTEM.**
- 3- USERS MUST MASTER MANEUVERS WITH SUCH A SYSTEM.**
- 4-CANDOCK IS NOT LIABLE FOR ANY DAMAGES RESULTING OF THE NON-COMPLIANCE OF THE FOLLOWING GUIDELINES.**

JETSLIDE

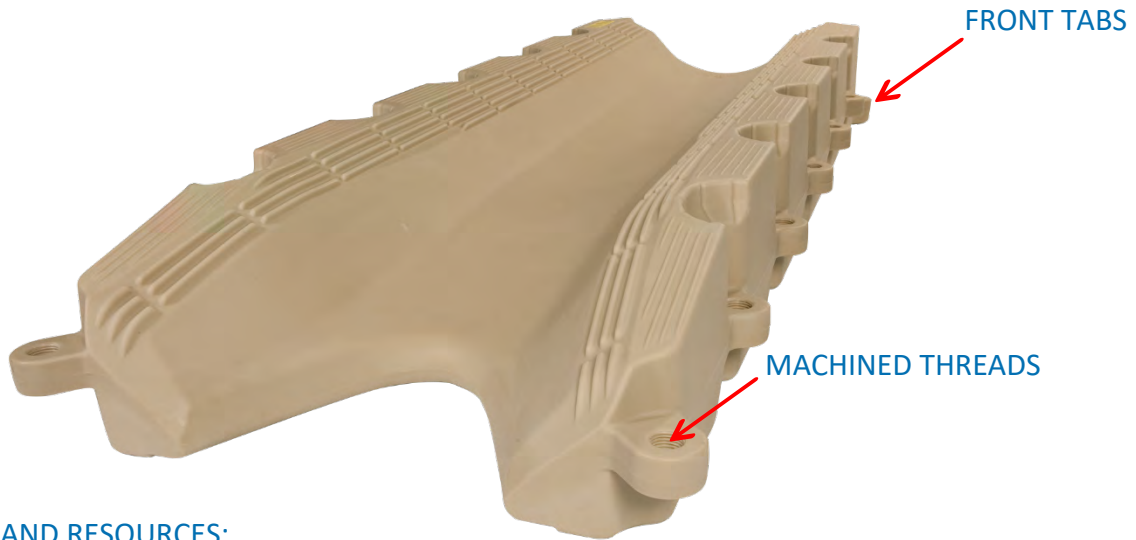

USEFUL LINKS AND RESOURCES:

[YouTube](#)

[Website](#)

TAB POSITIONS

	#6
	#5
	#4
	#3
	#2
	#1
	#0
	#-1

SPECIFICATIONS

Material/Composition: Medium-density polyethylene resin - RotoMolded

Available colors: Beige and Grey

Dimensions: L x W: 288 cm (114") x 96 cm (38") H: 38 cm (15")

Weight: 68 kg (150 lbs.)

Needed tools: G2 key for pin, Key for nut

SKU NUMBERS

G2 JETSLIDE BEIGE: C02-000015

G2 JETSLIDE GREY: C02-000016


TERMINOLOGY

JETSLIDE TABS: Prominent threaded parts on each side of the JETSLIDE, located under tab "1" *. As opposed to our regular CUBE coupling system, which requires the addition of a SLIDING NUT at the bottom of a connection point so that the CONNECTING PIN can have traction in the threads, the JETSLIDE TABS have their threads inside the tabs along its sides.


*The exception to the above description is the FRONT TABS (left and right), located underneath the other JETSLIDE tabs. This specifically allows the merging of 2 JETSLIDES in an "in-line" configuration. This allows configuring longer systems to accept longer/heavier vessels. See lower in this section for more explanations on "dual" JETSLIDE configurations.

PLUGS: These watertight plugs are always found on the front wall of the JETSLIDE. These plugs, made of a breathable material, act as pressure release valves, preventing the JETSLIDE's deformation due to temperature changes and pressure variations. Furthermore, these plugs prevent any condensation inside the JETSLIDE.

OVERVIEW

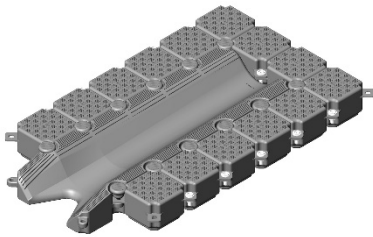

JETSLIDE SMALLEST CONFIGURATION (PWC)

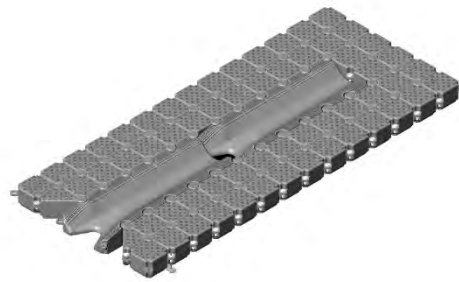

JETSLIDE BIGGEST CONFIGURATION (BOAT)

***THIS CONFIGURATION MAY NOT BE
SUITABLE FOR ALL BOATS***

ASSEMBLY PROCEDURE

PRIOR TO INSTALLATION

1-Assemble on a flat surface rather than in the water.

2-Assemble the cubes around the JETSLIDE. If you attach it to an existing Candock dock, make sure the plugs face the same direction as the existing dock. If your JETSLIDE is an independent unit, the cubes' vent plugs should be oriented towards the system's front.

PROCEDURE:

1-Prepare the needed SPACERS on each side of the JETSLIDE before manually inserting the connecting pins. The tab configuration will create a void in the assembly; depending on the cube's tabs utilized in the assembly, insert SPACERS in the missing tabs' opening.

2- Manually insert CONNECTING PINS to engage the threads.

3-When the pins are engaged, proceed by screwing manually or mechanically. Start by tightening the pins in the middle section of each side and work towards the front and the back **alternating**.

4-We suggest manually tightening the pins to better feel the needed torque for each CONNECTING PIN.

4) For the 2 front corners of the JETSLIDE connecting points, the CONNECTING PINS require SLIDING NUTS as the FRONT TABS are too low, and they don't have a threaded opening like the other tabs of the JETSLIDE. Insert a SLIDING NUT on the lowest tab available at the connection point and make sure to include the potentially needed SPACERS if the tab configuration creates a void in the assembly.

5) When the needed CUBES are all secured around the JETSLIDE, install BOLT FOR CUBE and NUTS assemblies all around the perimeter of the JETSLIDE system. Make sure to include the potentially needed SPACERS if the tab configuration creates a void in the assembly.

OPERATING A WATER-CRAFT WITH THE JETSLIDE

IMPORTANT NOTICE

The water depth at the back of the system (entry point) must be at least 1m (3.3') to avoid potential damage to the engine's propeller and skeg.

GOING UP THE SYSTEM

PWC: Approach the JETSLIDE at idle, keeping the craft straight and centered with the JETSLIDE. When the craft's bow is in contact with the JETSLIDE, give small throttle strokes to align the craft with the JETSLIDE. When the craft is in line with the JETSLIDE, throttle in slowly. After a few tries, you will develop a feel of how much throttle you must use to reach the final position on the JETSLIDE

BOAT: The engine must be trimmed entirely down during the entering procedures. Increase throttle power until the boat is entirely on the system. When the engine gets in contact with the JETSLIDE, you will feel the vessel has stopped. You must immediately throttle down. It indicates that the craft is at its final resting position. Entering the unit at high speed may damage the unit. We recommend, at first, that you try at slow speeds until you reach the correct speed. If the boat gets on the system but is not all the way in, you can continue throttling progressively until the boat reaches its final resting position. Be careful; boarding on the JETSLIDE at high speed can be dangerous.

NOTE: It is recommended to secure the craft to a cleat to prevent it from sliding back into the water accidentally. The craft can be locked to the JETSLIDE system with a CONNECTING PIN WITH LOCK CHAIN. See lower in this manual.

GOING DOWN THE SYSTEM

PWC: To go back into the water, initiate the procedure by pushing the PWC backward of 30-60cm (1' to 2') to bring the machine's weight towards the back of the system. Then, stand up at the back of your PWC, grab the seat's handle, and transfer your weight backward. The easiest way to push the PWC backward is to grab the PWC's nose in one hand and the handle with the other and then push gently. Be vigilant because, at some point, your PWC will want to go down by itself. At this point, you will have to get on it if you do not want it in the water without you.


BOAT: Trim the engine down completely and put the engine in reverse. Gradually increase throttle until craft starts to go down by itself. It helps if you wet the system, especially if the boat was not used for an extended period. It might be necessary to give a good throttle stroke to initiate the motion and then throttle down.

NOTE: For boats powered with turbine engine layout, a BOAT WINCH is required to initiate the process of going back in the water with the vessel. See lower in this manual.

WARNINGS & SPECIAL INSTRUCTIONS

- 1- For all JETSLIDE systems, the surrounding environments must not be subjected to waves of more than 60cm (24"). We recommend installing a JETSLIDE system in a protected area.
- 2-The installation of multiple PWC JETSLIDES side by side is possible, but we suggest a minimum of 2 rows of CUBES in-between each JETSLIDE. An installation with only one row is also possible, but there are risks of injuries for the surrounding users and damaging the PWC.
- 3-The lifting (crane) of multiple JETSLIDES assembled is strongly not recommended.
- 4-Aluminum riveted hulls may scratch the surface of the JETSLIDE.
- 5- "Stepped-hull" vessels as well as "v-drive or direct-drive" engine layouts are not compatible with the JETSLIDE system.
- 6-Please note that some boats have engine cooling intakes on the hull and may overheat if the boat is dry-docked on the system with the engine running.
- 7-All boats and PWC's must be brought entirely to the front of the JETSLIDE at all times.
- 8-Surfaces can be slippery when the system is wet.

STIFFENING BEAMS

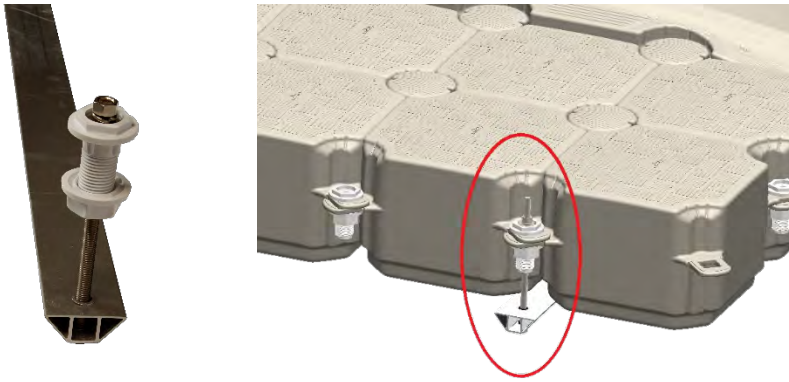

SPECIFICATIONS

Material/Composition: Aluminum and stainless-steel rods.

Needed tools: 1 1/8" ratchet socket and wrench

*Bolt for cube and nut NOT included.

**The hardware of this product is made of stainless steel and brass.

If you are installing this product in a salty environment, or if there is a risk of corrosion, replace brass components with stainless steel ones. Don't forget to apply anti-seize grease to the nuts.

SKU NUMBERS

STIFFENING BEAM FOR JETSLIDE SYSTEM 115" (6 CUBES): C02-000006

STIFFENING BEAM FOR JETSLIDE SYSTEM 153" (8 CUBES): C02-000007

ASSEMBLY PROCEDURE

PRIOR TO INSTALLATION

- 1-Assemble STIFENING BEAMS when the JETSLIDE system is in the water.
- 2-Position STIFFENING BEAM(S) precisely at the designated position provided by your Candock's representative.

PROCEDURE


- 1-Insert the STIFFENING BEAM assembly onto "pre-installed" BOLT FOR CUBE and NUT assembly using the provided hardware (bolt, washers, and nut). Holding the threaded rods' very end, slide the beam underneath the system starting from the rear. Ensure installing the beams at the front and making your way to the back with the subsequent beams if needed.
- 2-Once aligned, secure the beam to the BOLT FOR CUBE with the hardware kit supplied with the bars. Insert the threaded rods through the BOLT FOR CUBE and manually engage the washers, lock washers, and nuts.
- 3-Complete installation by adjusting the beam's positions to be perfectly perpendicular to the JETSLIDE(S). The over-tightening of the stabilizer bars may exert undue pressure on the tabs and cause damages to the JETSLIDE(S).

TIP


-The number of STIFFENING BEAMS needed for a specific configuration may be estimated with the below ratio:

(1x) STIFFENING BEAM FOR EVERY 455kg (1000lbs) OF THE VESSEL'S WEIGHT.

Example: A boat of 910kg (2000lbs) "wet weight" requires (2x) STIFFENING BEAMS.

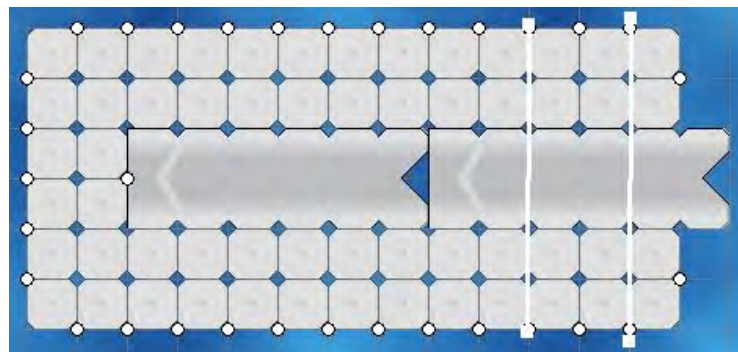

“V” PLATE

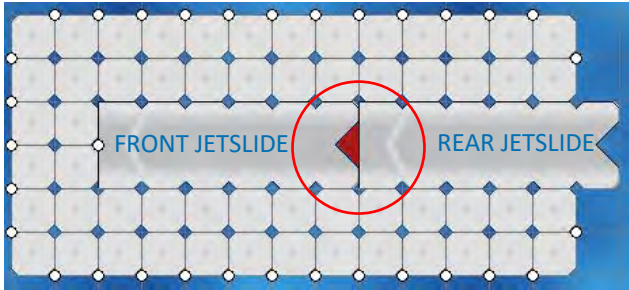

SPECIFICATIONS

Material/Composition: HDPE and stainless-steel hardware.
Needed tools: 7/32" Halen key

SKU NUMBER



V-PLATE: C02-000017

ASSEMBLY PROCEDURE


With an assembly of dual “inline” JETSLIDES, the connection point between the 2 JETSLIDES creates an opening at the “V-shaped” entry point of the front JETSLIDE. To cover this hazardous opening, you must install the V-PLATE, which is to be secured in place under the JETSLIDE with (6X) counter sunken Halen screws (provided) screwed into casted brass inserts.

PROCEDURE


1-Flip the JETSLIDE upside down and secure the V-PLATE with the provided hardware.

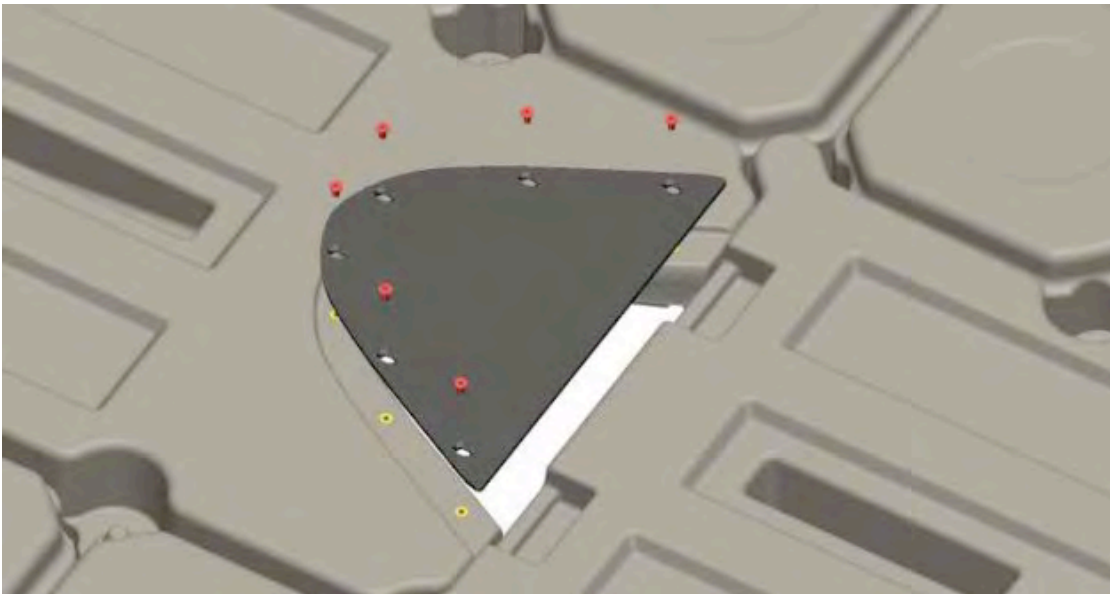


EXTENSION PLATES (1, 2, AND 3 CUBES) AND BOLTS FOR JETSLIDE



EXTENSION PLATE 1 CUBES



EXTENSION PLATE 2 CUBES

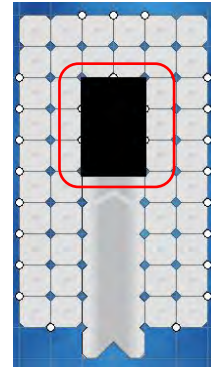

EXTENSION PLATE 3 CUBES

SPECIFICATIONS

Material/Composition: HDPE and stainless-steel hardware.

Needed tools: Key for nut

*Bolts for JETSLIDE and sliding nuts not included.

SKU NUMBER

EXTENSION PLATE 1 CUBE: C02-000018

EXTENSION PLATE 2 CUBES: C02-000019

EXTENSION PLATE 3 CUBES: C02-000020

BOLT FOR JETSLIDE: C02-000001

ASSEMBLY PROCEDURE

The EXTENSION PLATES, available in 3 different sizes, are used to accommodate intermediary boat lengths as opposed to including a second JETSLIDE (in a dual “in-line” configuration) Precisely adapting the overall size of the system needed for a specific boat while keeping the cost as low as possible. To secure the EXTENSION PLATE, we use modified BOLTS FOR CUBE to remove the “locking ribs.” It allows for the BOLTS FOR CUBE to be used as regular “bolts.” When modified, these bolts are named BOLT FOR JETSLIDE.

*Once installed, the plate may slightly deform. This deformation is expected and normal.

**Please note that the surface of the safety plate can be slippery.

PROCEDURE

- 1- Insert SLIDING NUT on all cube tabs that are supporting the EXTENSION PLATE.
- 2- Place all needed SPACERS if the tab configuration creates a void in the assembly, starting from the lowest available tab to the highest. Make sure the EXTENSION PLATE is leveled.
- 3- Gently put the EXTENSION PLATE without moving the spacers.
- 4- Manually engage the BOLT FOR JETSLIDE into the SLIDING NUTS.
- 5- Firmly tighten the BOLT FOR JETSLIDE, ideally with a RATCHET key for nut.



JETSLIDE BOAT WINCHES



SPECIFICATIONS

Material/Composition: Aluminum and galvanized steel or stainless steel 316

Needed tools: Key for nut and 1 1/8" ratchet socket and wrench

*Bolt for cube and nuts included.

SKU NUMBERS

WINCH JETSLIDE FOR BOAT (ALUMINUM): C02-000021

WINCH JETSLIDE FOR BOAT (STAINLESS STEEL): C02-000022

ASSEMBLY PROCEDURE

The purpose of the JETSLIDE BOAT WINCH is mainly to initiate the "unberthing" maneuvers of turbine/jet engine vessels when users want to get their boats back in the water from a fully dry-docked position.

Position the JETSLIDE BOAT WINCH and PULLEY exactly at the designated position provided by your Candock's representative.

PROCEDURE

1-Install the JETSLIDE BOAT WINCH with the provided BOLT FOR CUBE and NUTS


2-Once the winch is installed, insert the pulley and connecting ring assembly onto the "pre-installed" BOLT FOR CUBE and NUT assembly using the provided hardware.

3-Complete installation funneling the rope from the winch through the pulley and back towards the vessel's front.

IMPORTANT NOTICE

-Maximal boat weight capacity of the JETSLIDE BOAT WINCHES is 1360kg (3000lbs)

Candock does not recommend using the winch and its components to complete your vessel's "berthing maneuvers." do not use the winch to pull your boat onto the JETSLIDE system.

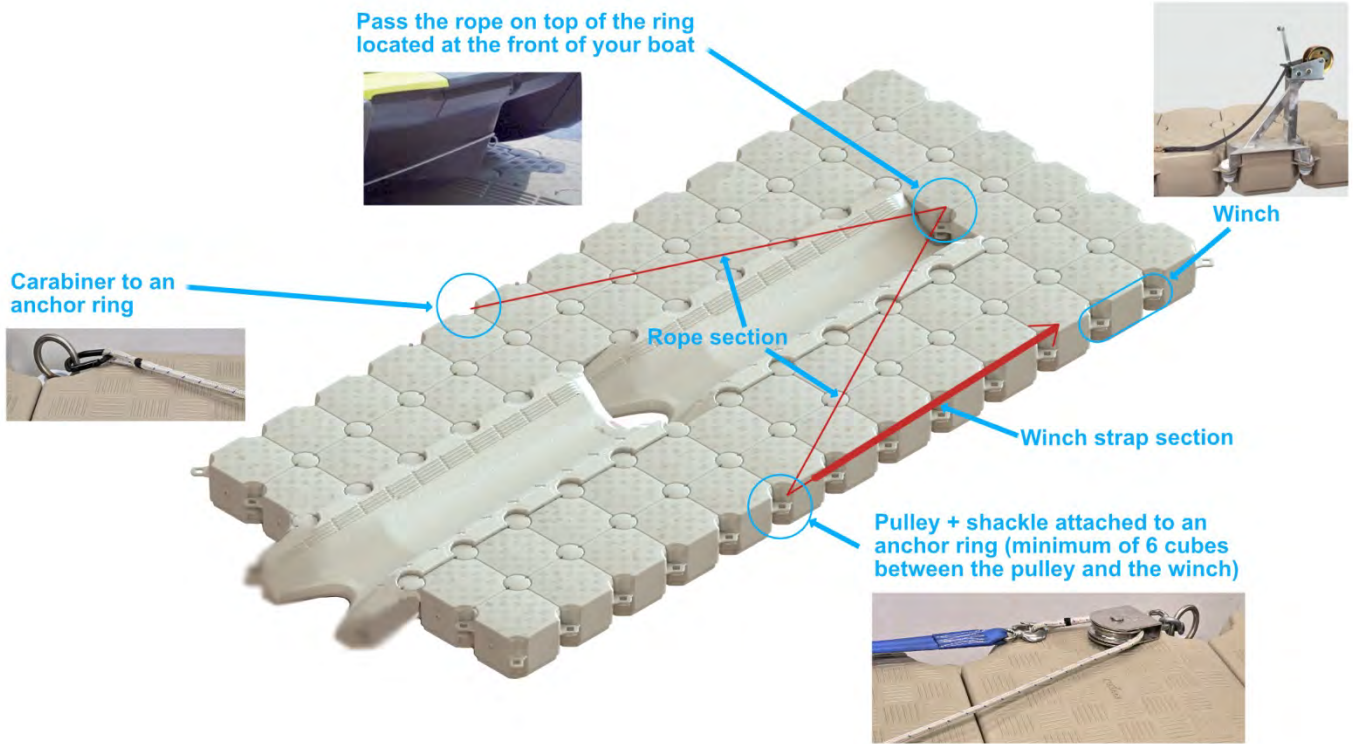

JETSLIDE PWC WINCH



SPECIFICATIONS

Material/Composition: Stainless steel 316 and plastic handle

SKU NUMBER
JETSLIDE PWC WINCH: C02-000023

ASSEMBLY PROCEDURE

The purpose of JETSLIDE PWC WINCH is mainly to initiate the “unberthing” maneuvers of turbine/jet engine PWC when users need help putting their PWC back in the water from a fully dry-docked position.

Position the JETSLIDE PWC WINCH exactly at the designated position provided by your Candock’s representative.

PROCEDURE


- 1- Remove the regular CONNECTING PIN that is at the designated location.
- 2-Install the JETSLIDE PWC WINCH by manually screwing it in place.

IMPORTANT NOTICE

-Maximal PWC weight capacity of the JETSLIDE PWC WINCH is 500kg (1100lbs)

-Candock does not recommend using the winch and its components to complete the “berthing maneuvers” of your PWC. Do not use the winch to pull your PWC onto the JETSLIDE system.

CONNECTING PIN WITH LOCK CHAIN

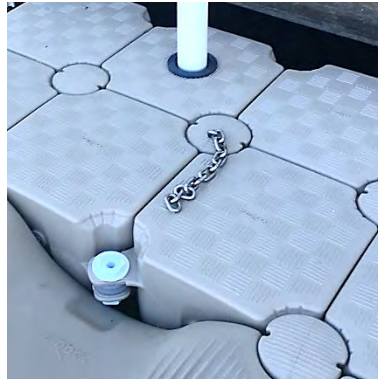

SPECIFICATIONS

Material/Composition: HDPE, concrete, and 40cm (16") stainless steel chain section

Available colors: Beige and Grey

SKU NUMBER

CONCRETE FILLED CONNECTING PIN G2 WITH SAFETY CHAIN - BEIGE: C03-000045

CONCRETE FILLED CONNECTING PIN G2 WITH SAFETY CHAIN - GREY: C03-000046

ASSEMBLY PROCEDURE


- 1-Establish the location of the future CONNECTING PIN WITH LOCK CHAIN on the dock.
- 2-Remove the CONNECTING PIN that is at the desired location.
- 3-Insert the CONNECTING PIN WITH LOCK CHAIN and complete the screwing process by hand.

PWC JETSLIDE SYSTEM CONFIGURATION GUIDELINES


The following section is also essential to Candock. **The configuration of a PWC Jetslide system is of the utmost importance to ensure its optimal durability and performance.** Following the below recommendations and guidelines is critical for your product to perform as we intend.

There are several sizes and models, so the below configurations may have to be modified on a case-by-case basis. Please contact a Candock representative in the event you wish to alter the below configurations.

1 – IDEAL CONFIGURATION

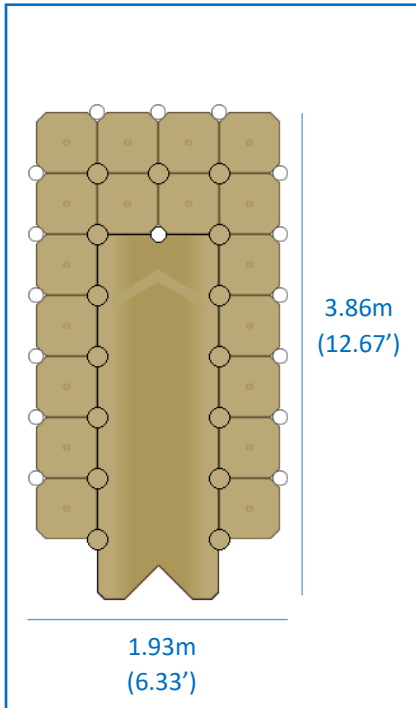

2 – ALTERNATE CONFIGURATION

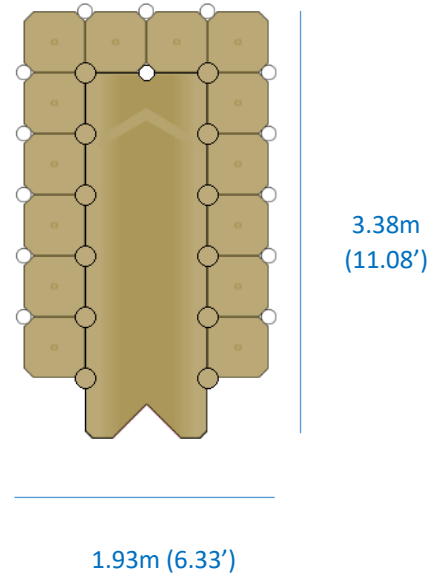


IMPORTANT NOTIONS

-Always keep the system symmetrical left/right.

-In doubt, please refer to your Candock representative.

-For multiple units assembled, we advocate **2 rows of cubes in between each JETSLIDE**. Using only 1 row of cubes between each JETSLIDE is also possible but be aware of possible injuries or machine damages. As space between the machines is limited, there are potential risks of impacts with surrounding objects or users.

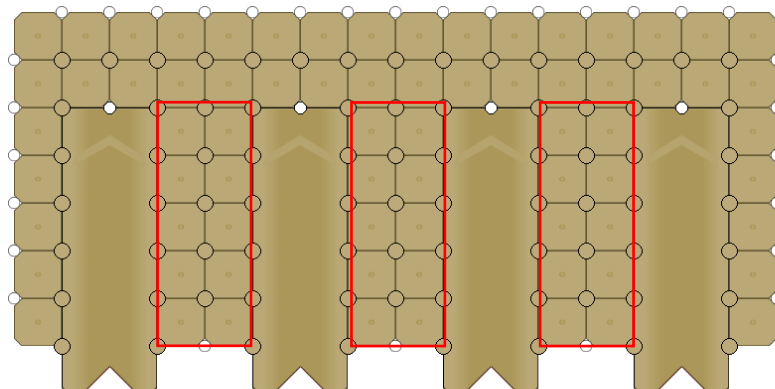


PWC JETSLIDE SYSTEM ANCHORING GUIDELINES

The following configurations are showcased to help determine the best scenario for each situation. Numerous factors influence the exact suggested layout, so the following proposed layouts must not be taken integrally. Modifications and altering of these are highly probable. Please contact a Candock representative to gather clarification and validation on the below configurations.

The below section is segmented as per our anchoring accessories/techniques categories. Note that combinations of multiple techniques may apply, and some alterations of the below accessories/techniques may also be involved in the process. The below list aims at covering as many of the possible scenarios. If the JetSlide system is secured against another floating or fixed structure (another Candock system, a standard floating dock, a fixed dock, or seawall), this "other" structure must be adequately anchored or fixed in place to withstand the torque applied by the addition of the JetSlide system.

It is also probable that in the event of a regular "POST CUBE AND PILES" anchoring technique, additional accessories may be required to secure the piles' upper section onto another fixed structure. In this case, the POST CUBES location may be changed to accommodate the needed bracket and hardware. Additionally, the POST CUBES may also be substituted with our HDPE PILE GUIDE FOR 2 7/8" STEEL PILE if the situation allows.

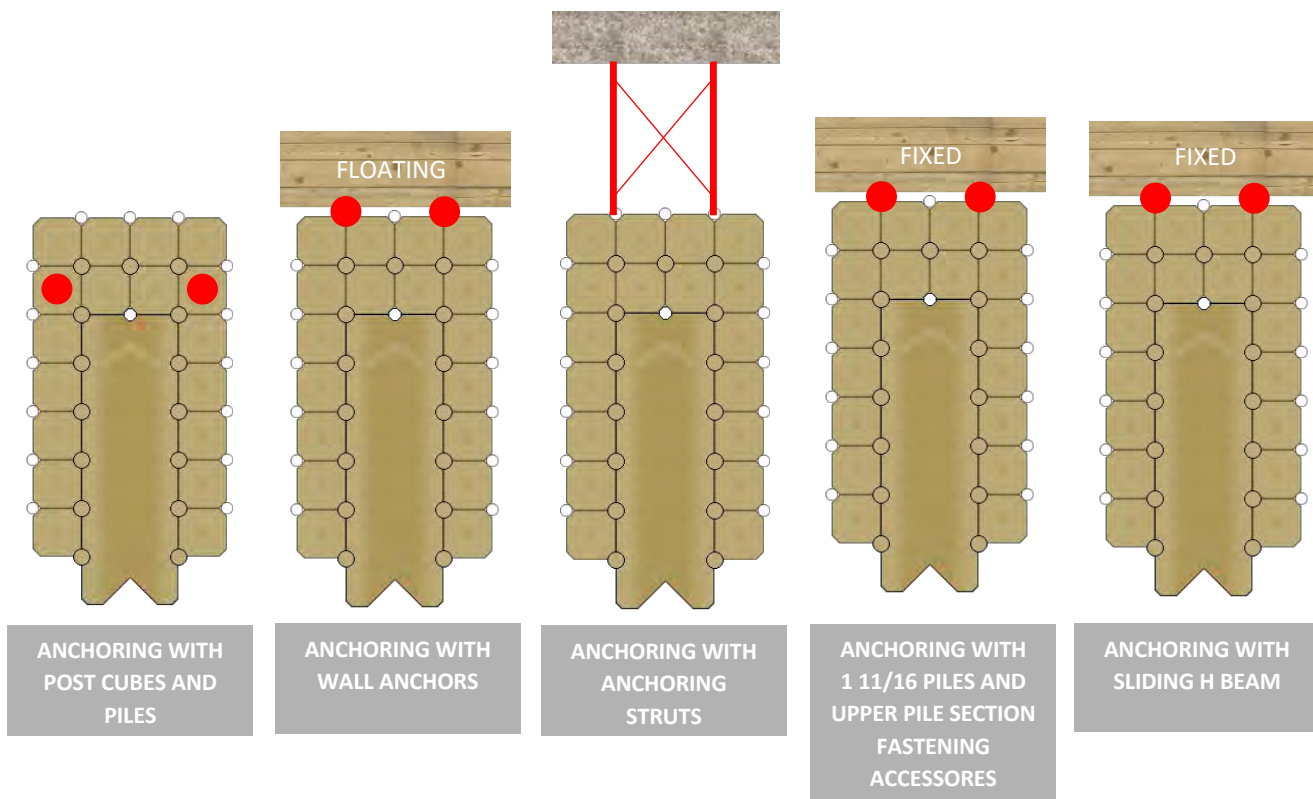

A FEW EXAMPLES



BOAT JETSLIDE SYSTEM CONFIGURATION GUIDELINES

The following section is also essential to Candock. **Indeed, the configuration of a BOAT Jetslide system is of the utmost importance to ensure its optimal durability and performance.** Following the below recommendations and guidelines is vital for your product to perform as we intend.

There are several sizes and models, so the below configurations may have to be modified on a case-by-case basis. Please contact a Candock representative to help in determining a valid and approved configuration for your vessel.

To better help our customers, we have elaborated a comprehensive chart that helps determine a specific vessel's needed layout while considering the 2 most important variables, length, and weight.

IMPORTANT NOTICES

- Maximal boat's weight capacity of Candock's JETSLIDE system is 1360kg (3000lbs), including hull, engine, fuel, and equipment.
- Vessels with V-Drive and Direct-Drive engine layouts are not compatible with the JETSLIDE's system.
- Vessels with "step-hull" designs are not compatible with the JETSLIDE's system.
- Pontoon boats are not compatible with the JETSLIDE's system.




DRIVE-ON SYSTEM FOR SEADOO SWITCH



CONFIGURATION SWITCH 13'

CONFIGURATION SWITCH 18'

CONFIGURATION SWITCH 21'

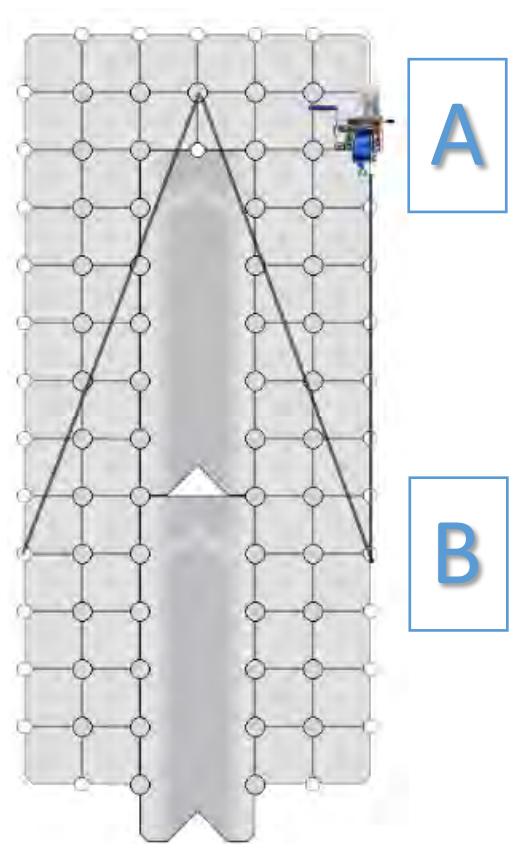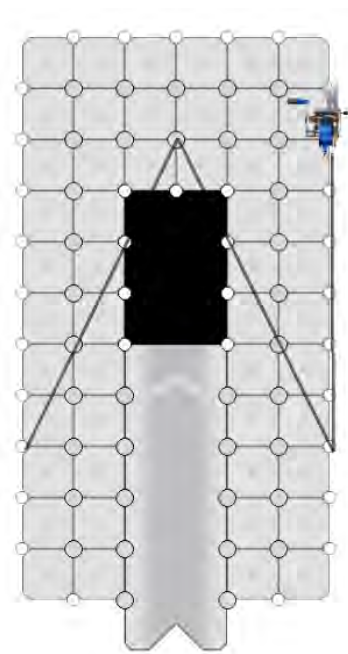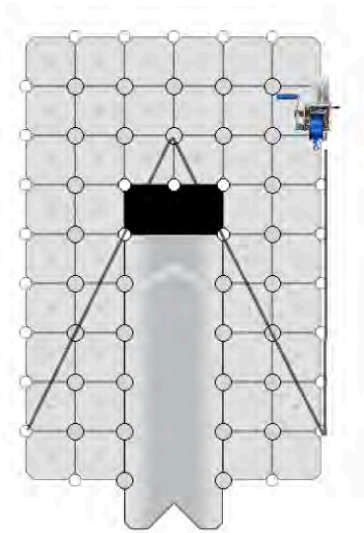

IMPORTANT NOTICE

- For the 13' and 18' Switch configurations, the basic winch set (galvanized or stainless steel) that includes a 19 ft rope is sufficient for launching the boat. For the 21' Switch configuration, a 24 ft rope (CFF-000319) must be ordered separately to allow for the boat to be launched.
- The distance between the winch (A) and the pulley (B) should be a minimum of 6 cubes to allow sufficient travel (winch strap) for launching the boat.

ASSEMBLY PROCEDURE

BEFORE INSTALLATION

- 1-Assemble on a flat surface rather than in water.
- 2-Assemble the cubes around the JETSLIDE. If you attach it to an existing Candock dock, make sure the plugs are in the same direction as the dock. If your Switch drive-on is a standalone unit, the cube vent caps should be facing the front of the system.
- 3-The assembly procedure is very similar to the boat JETSLIDE system, except for a few important details mentioned below.

PROCEDURE:

1-Prepare the necessary SPACERS on each side of the JETSLIDE before manually inserting the CONNECTING PINS. The configuration of the tabs will create a void in the assembly; Depending on the orientation of the cubes used in the assembly, insert the SPACERS into the opening of the missing tabs.

1.1-Usually, the JETSLIDE is raised from the cubes by a few centimeters. In the case of the SeaDoo Switch system, the goal is to have the JETSLIDE(S) at the same height as the cubes. To achieve this, we add 2 additional SPACERS directly on each tab of the JETSLIDE before adding the cubes. These SPACERS will be considered as tabs 0 and -1.

1.2-Since the addition of these 2 additional SPACERS creates an out-of-standard thickness, the use of **CONNECTING PIN LONG VERSION is required** along the entire perimeter of the JETSLIDE(S). The additional threads of these long CONNECTING PINS allow for a better grip in the tabs of the JETSLIDE, ensuring a solid assembly.


2- Manually insert the CONNECTING PINS to engage the threads.

3-When the CONNECTING PINS are engaged, proceed with the MANUAL KEY or the KEY FOR DRILL for G2 pins. At the end of the process, we suggest that you manually tighten the CONNECTING PINS with the MANUAL KEY to better feel the force needed so that you don't overtighten.

5-At the entrance to the Switch system, it is important to create a slight slope to prevent the Switch's outer pontoons from coming into contact with the cubes. To achieve this, we will gradually reduce the number of additional SPACERS (point 1.1) between the cubes and the JETSLIDE.

We're only going to add 1 SPACER to Section **A**, and none to Section **B**. In this way, a gentle slope will be created once the system is in the water.

6-When all the CUBES are secured around the JETSLIDE, install BOLTS FOR CUBES and WHITE NUTS all around the perimeter of the SeaDoo Switch system. Be sure to include any SPACERS that may be needed if the tab configuration creates a gap in the assembly.

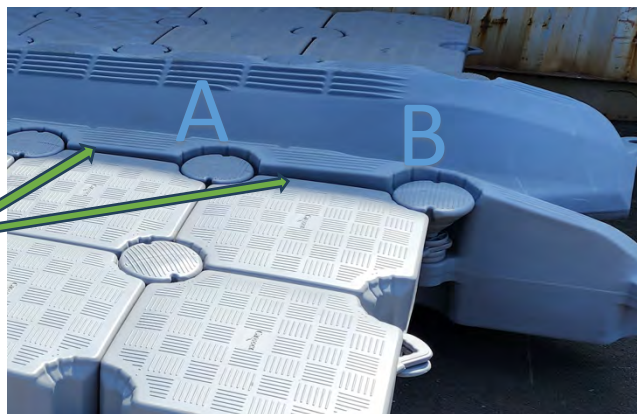

© JETROLL DRY-DOCK SYSTEM

JETROLL SYSTEM BASIC CONCEPTS

The JETROLL dry-dock system is a single-piece unit that is specially designed to accommodate PWC's.

Consisted of a single piece of medium density polyethylene, with 100% of its interior filled with expanded polystyrene, the JETROLL is virtually unsinkable. In opposition with the JETSLIDE, the JETROLL is equipped with 12 nylon wheels on stainless steel shafts, allowing for even easier berthing and unberthing maneuvers. Furthermore, as it requires virtually no assembly, it offers advantages that are not to be neglected.


Depending on the environment and the PWC, Candock will determine the proper anchoring layout.




There are some basic yet, essential rules and premises to ensure a functional system:

- 1- CANDOCK'S PROPOSED ANCHORING CONFIGURATION SHOULDN'T BE ALTERED IN ANY WAYS.**
- 2- USERS MUST MASTER MANEUVERS IMPLIED WITH SUCH A SYSTEM.**
- 3-CANDOCK IS NOT LIABLE FOR ANY DAMAGES RESULTING OF THE NON-COMPLIANCE OF THE FOLLOWING GUIDELINES.**

JETROLL (BOW-STOP, HOLE CAPS, AND WHEELS)

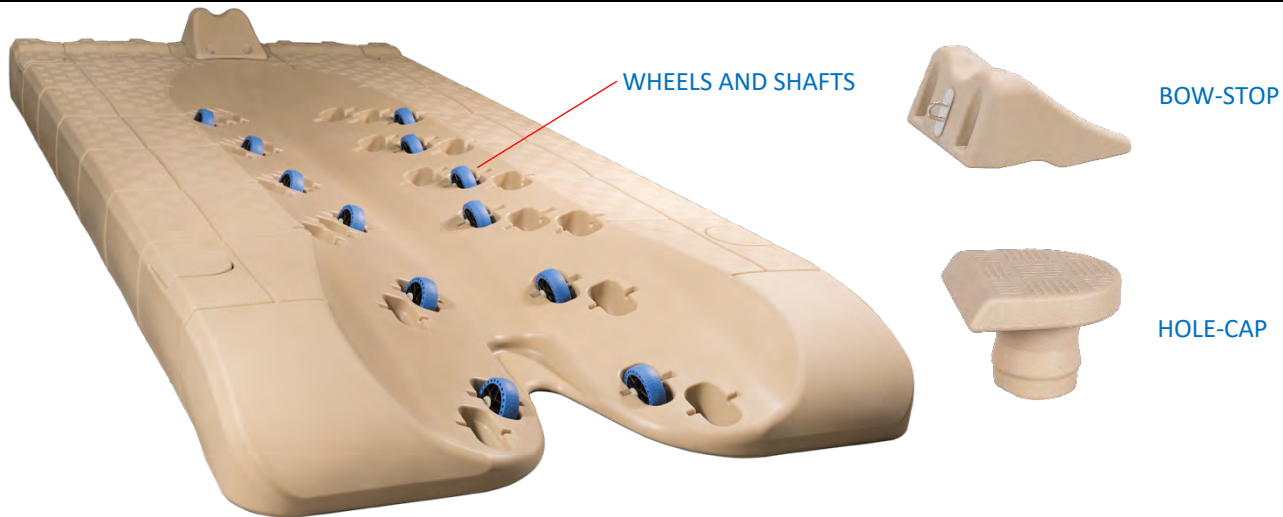

TAB POSITIONS



SPECIFICATIONS

Material/Composition: Medium-density polyethylene resin – Roto-molded
Available colors: Beige and Grey
Dimensions: L x W: 386 cm (152”) x 193 cm (76”) H: 30.5cm (12”)
Weight: 159 kg (350 lbs.)
Needed tools: G2 key for pin, Key for nut, rubber mallet, 7/32” Halen key

[YouTube](#)

SKU NUMBERS

JETROLL BASIC KIT BEIGE: C02-000013
 JETROLL BASIC KIT GREY: C02-000014
 BOW-STOP BEIGE: C02-000008
 BOW-STOP GREY: C02-000009
 HOLE CAP BEIGE: C02-000010
 HOLE CAP GREY: C02-000011
 WHEELS KIT: C02-000012

TERMINOLOGY

JETROLL TABS: (4x) prominent threaded openings that are on the front of the JETROLL; which are located under tab “0” and under “-2”. The 2 outside tabs are the lowest (under “-2”), and the 2 center ones are the highest (under “0”). This particularity allows for our EDGE cubes to be merged at the front of the JETROLL. As opposed to our regular CUBE coupling system, which requires the addition of a SLIDING NUT at the bottom of a connection point so that the CONNECTING PIN can have traction in the threads, the JETROLL also has its threads inside the tabs.

PLUGS: These watertight plugs are always found in the front part of the JETROLL. These plugs, made of a breathable material, act as pressure release valves preventing JETROLL’s deformation due to temperature changes and pressure variations. Furthermore, these plugs prevent any condensation inside the JETROLL.


WHEELS & PLASTIC WASHERS: (12x) plastic and polyurethane wheels and (24x) nylon washers that can be positioned in numerous configurations to ensure an optimal fit with any PWC on the market. Include (1x) small nylon washer on each side of each wheel for a total of (24x) for each JetRoll. The configuration shown in the image below is a suggestion. We recommend that you start with this one and adjust it as required. Make sure that the watercraft rests correctly on the wheels when driving on, and that the wheels turn freely during operation. Suggested starting configuration: 1-1-1-2-2 3

SHAFTS: (12x) stainless shafts that allow for smooth rolling motion of the wheels.

BOW-STOP: Molded plastic piece positioned at the front of the JETROLL to help prevent the PWC from exceeding the front of the system during berthing maneuvers.

HOLE CAP: A molded plastic piece that can be “snapped-on” into the circular openings on the 4 corners of the JETROLL. Depending on the adequate anchoring layout and accessories, these are to be inserted in the remaining openings to prevent a trip hazard.

OVERVIEW

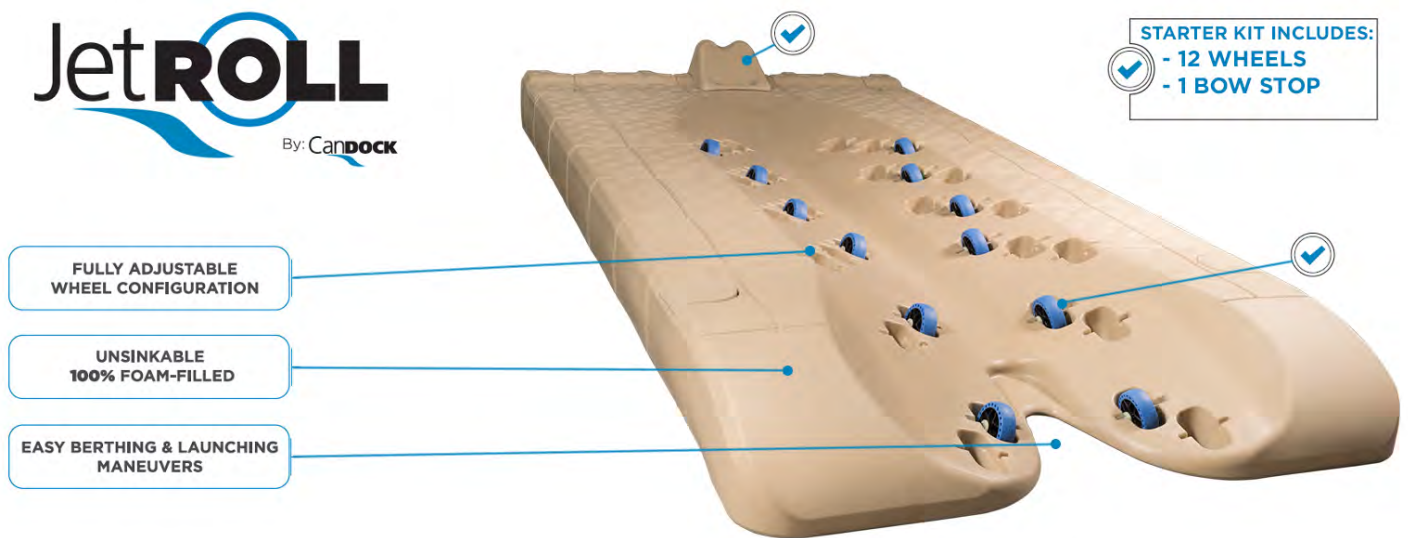

ASSEMBLY PROCEDURE

PRIOR TO INSTALLATION

1-Assemble on a flat surface rather than on the water.

PROCEDURE:

1-Prepare the needed parts around your JETROLL (2 HOLE CAPS, 1 BOW-STOP, and 12 WHEELS AND SHAFTS).

2-Determine the location of the 12 wheels. Ideally, Candock suggests using the featured pre-set (above image). The goal is to create a lower area to create a cradle for the machine to rest in the system's middle. Especially after/during berthing maneuvers, this lower-center geometry is to prevent the PWC from rolling back in the water by itself.

3-Using the rubber mallet, hammer down on the wheel and shaft assembly with a single stroke motion, directly on the wheel.

4-Secure the BOW-STOP using the provided hardware. Brass inserts are already casted in the plastic of the unit.

5- If needed, using the rubber mallet, hammer down HOLE-CAPS in the proper locations.

OPERATING A WATER-CRAFT WITH THE JETROLL

IMPORTANT NOTICE

The water depth at the back of the JETROLL must be at least 1m (3.3') to avoid potential damage to the PWC turbine.

GOING UP THE SYSTEM

Approach the JETROLL at idle, keeping the craft straight and centered with the JETROLL. When the craft's bow is in contact with the JETROLL, give small throttle strokes to make the craft align with the JETROLL. When the craft is in line with the JETROLL, throttle in slowly. After a few tries, you will develop a feel of how much throttle you must use to reach the final position on the JETROLL.

NOTE: It is recommended to secure the craft to the BOW-STOP's eyelet to prevent the PWC from rolling back into the water accidentally.

GOING DOWN THE SYSTEM

To go back into the water, initiate the procedure by pushing the PWC backward of 30-60cm (1' to 2') to bring the machine's weight towards the back of the system. Then, stand up at the back of your PWC, grab the seat's handle, and transfer your weight backward. The easiest way to push the PWC backward is to grab the PWC's nose in one hand and the handle with the other and then push gently. Be vigilant because, at some point, your PWC will want to go down by itself. At this point, you will have to promptly get on the machine if you do not want your watercraft in the water without you.

WARNINGS & SPECIAL INSTRUCTIONS

1- For all JETROLL systems, the surrounding environments must not be subjected to waves of more than 60cm (24"). We recommend installing a JETROLL system in a protected area.

2-Surfaces can be slippery when the system is wet.

3-All PWC's must be brought entirely to the front of the JETSLIDE at all times.

LINK-KITS



SPECIFICATIONS

Material/Composition: HDPE and SS 316 L

Available colors: Beige and Grey

Needed tools: 15/16" ratchet socket and wrench

***The hardware of this product is made of stainless steel and brass. If you are installing this product in a salty environment, or if there is a risk of corrosion, replace brass components with stainless steel ones. Don't forget to apply anti-seize grease to the nuts.*

SKU NUMBERS

LINK KIT BEIGE: C02-000024

LINK KIT GREY: C02-000025

TERMINOLOGY

UPPER LINK: Rotomolded plastic piece that fills the voids of the piling openings on the JETROLLS.

THREADED ROD AND HARDWARE: SS 316 and brass hardware to link the upper and lower link parts together.

LOWER LINK: HDPE plate fitted underneath the Jetroll allows for a complete assembly of the LINK KIT.

OVERVIEW

The addition of LINK KITS between multiple JETROLLS may be suggested or mandatory depending on the environment and conditions the systems are to be installed in. Please refer to your Candock distributor to know if LINK KITS should be included on your system. The addition of LINK KITS provides a stiffer assembly and prevents the JETROLLS from moving/sinking independently.

ASSEMBLY PROCEDURE

PRIOR TO INSTALLATION

Position the JETROLLS in the water at their final location before installing the LINK KITS

One person should be standing on the JETROLLS with one tool, and the other person should be in the water with the other tool to hold the "bottom" hardware.

PROCEDURE:

1-Position the upper and lower links onto the JETROLL connection point.



2-Insert threaded rods with washers from the top.



3-Place and hold the lower link underneath the JETROLLS



3-Insert the lower hardware and hold it in place while the person on the JETROLLS screws the threaded rod in place.



CONNECTING PINS LONG TYPE



SPECIFICATIONS

Material/Composition: High-density polyethylene

Available colors: Beige and Grey

Dimensions: L :26.6cm x W: 17.2 cm (6.88”) / Shaft diameter : 4.547 cm (1.819”)

Weight: 377g

Needed tools: G2 key for pin

SKU NUMBERS

CONNECTING PIN LONG TYPE BEIGE: C02-000002

CONNECTING PIN LONG TYPE GREY: C02-000004

TERMINOLOGY

HEAD: Upper part of the CONNECTING PINS designed with a flat and anti-skid surface.

NOTCH: Manufactured recess in the pin’s head that allows the tool to insert the key for screwing and unscrewing.

SHAFT: The male part of our coupling system, the extended threaded shaft, is inserted in the JETROLL’s front tabs.

ASSEMBLY PROCEDURE

1-Initiate the rotating process by hand.

2-When the CONNECTING PIN has access to the JETROLL’s tab threads, proceed by screwing manually or mechanically with the proper tools.

3-Make sure to securely tighten the CONNECTING PINS until snug, without over-tightening them.

TIPS

1-When initially inserting the CONNECTING PINS in place, you might want to firmly “tap” the pin in place. Ensure a firm “initial” grip of the shaft threads into the tabs. This “tap” helps you get the pin through the cube’s tabs resting on top of the JETROLL’s tabs.

2-Once the assembly process is completed, align the NOTCHES of the CONNECTING PINS using the manual key. This simple operation allows to quickly locate any CONNECTING PINS which could have unscrewed over time.

3-Always proceed with caution if using a power drill to fasten the CONNECTING PINS; the drill can tend to “kick”. Use protective footwear. If using a power drill to unscrew pins, always loosen-up the pins manually before using the drill.

4- Never use an “impact tool” to fasten the connecting pins as you will most likely damage the connecting pins as well as the assembly key for drill.


PWC JETROLL SYSTEM CONFIGURATION GUIDELINES

The following section is also essential to Candock. **The configuration of a PWC JetRoll system is of the utmost importance to ensure its optimal durability and performance.** Following the below recommendations and guidelines is vital for your product to perform as we intend.

There are several sizes and models of PWCs, so the below configurations may have to be modified on a case-by-case basis. Please contact a Candock representative in the event you wish to alter the below configurations.

IMPORTANT NOTIONS

- Always keep the rear (entry point) of the JETROLL free for it to sink freely when the PWC is climbing onto the system.
- For multiple units assembled, LINK KITS may or may not be suggested. The overall exposure and application influence the inclusion or exclusion of LINK KITS. Always refer to your Candock representative for guidance.
- Upon completion of an installation, HOLE CAPS or LINK KITS are mandatory in all 4 pile openings of the JETROLL(s) to ensure a safe and “trip-hazard-free” environment.
- BOW STOPS are mandatory on all JETROLL installations
- The inclusion of 12 wheels is mandatory on all JETROLL installations
- The ideal wheel configuration may vary depending on the hull’s shape and machine size.

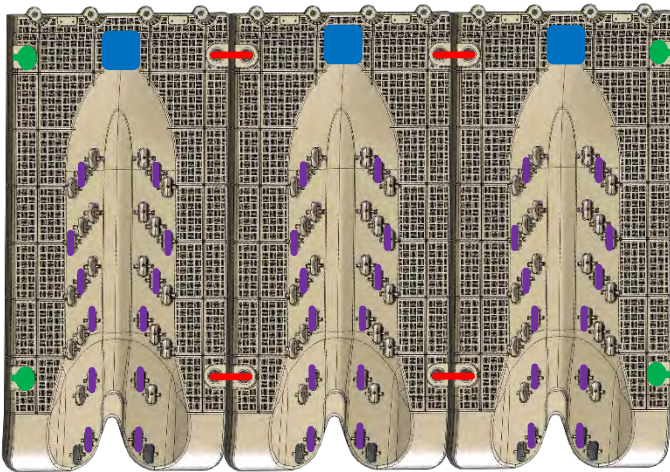

PWC JETROLL SYSTEM ANCHORING GUIDELINES

The following configurations are showcased to help determine the best scenario for each situation. There are several factors that influence the exact suggested layout. The following proposed layouts must not be taken integrally. Modifications and altering of these are highly probable. Please contact a Candock representative to gather clarification and validation on the below configurations.

The below section is segmented as per our anchoring accessories/techniques categories. Note that combinations of multiple techniques may or may not apply, and some alterations of the below accessories/techniques may also be involved in the process. The below list aims at covering as many of the possible scenarios. If the JetRoll system is secured against another floating or fixed structure (another Candock system, a regular floating dock, a fixed dock, or seawall), this “other” structure must be adequately anchored or fixed in place to withstand the torque that the addition of the JetRoll will apply.

	FIXED	FLOATING	FIXED	CANDOCK	
STAND ALONE ANCHORING WITH PILES & PVC SLEEVES	ANCHORING WITH 2 7/8" STEEL PILES + PVC SLEEVES AND UPPER PILE SECTION FASTENING ACCESSORIES	ANCHORING WITH SWIVEL ANCHOR CHANNELS	ANCHORING WITH ANCHORING STRUTS (LENGTH 5' MAX)	CONNECTED TO A CANDOCK WITH (4X) EXTENDED CONNECTING PINS + (12X) SPACERS	

GANGWAYS BASIC CONCEPTS AND CONFIGURATION GUIDELINES

The Candock aluminum access ramps (gangways) allow for a tailored transition passage from your shoreline to your Candock system. All our gangways consist of an assembly of multiple components. A proper analysis of the environment, the dock's application, and your specific needs and requirements will determine the gangway configuration and its components. Please contact a Candock representative for more information.

Several widths, lengths, and gages are available to suit most of the possible scenarios.

The categories of accessories can be classified as follow:

1-SHORE-END ACCESSORIES

2-GANGWAY FRAMES AND RAMP ACCESSORIES

3-DOCK-END ACCESSORIES



The following rules are fundamental to abide by to ensure the optimal efficiency and durability of your gangway:

- A GANGWAY SHOULD NEVER BE STRONGLY SECURED AT BOTH ENDS (SHORE-END AND DOCK-END)
- THE SHORE-END CONNECTING POINT OF ANY GIVEN GANGWAY SHOULD BE HIGHER THAN THE HIGHEST POSSIBLE WATER LEVEL.
- TO KEEP A MODERATE DOWN SLOPE, THE LENGTH OF ANY GIVEN GANGWAY SHOULD BE AT LEAST 3 TIMES THE VERTICAL DEPRESSION/DROP IT HAS TO COVER

WELDED GANGWAYS



SPECIFICATIONS

Materials / Composition: 6005 T-61 Marine grade aluminum
Specifications: See our GANGWAY SPECIFICATION CHART

SKU NUMBERS

WELDED GANGWAY FRAME 90cm X 360cm (3' X 12'): C05-000026
 WELDED GANGWAY FRAME 90cm X 480cm (3' X 16'): C05-000027
 WELDED GANGWAY FRAME 90cm X 600cm (3' X 20'): C05-000028
 WELDED GANGWAY FRAME 120cm X 360cm (4' X 12'): C05-000029
 WELDED GANGWAY FRAME 120cm X 480cm (4' X 16'): C05-000030
 WELDED GANGWAY FRAME 120cm X 600cm (4' X 20'): C05-000031


DESCRIPTION

WELDED FRAMES: Consisted of an entirely welded assembly, our WELDED FRAMES are made with 5.08cm x 12.70cm (2" x 5") extrusion profiles. They are usually preferred for rugged residential applications or commercial/industrial applications. They are the most robust frames available at Candock. See below the SKU list for available dimensions.

GANGWAY SPECIFICATION CHART

WELDED FRAMES			
DIMENSIONS (ft)	MAX LOAD LBS.	MAX LOAD KGS	MAX OCCUPANCY (PEOPLE)
3X12 FRAME	1750	795	10
3X16 FRAME	1750	795	10
3X20 FRAME	1750	795	10
4X12 FRAME	1750	795	10
4X16 FRAME	1750	795	10
4X20 FRAME	1750	795	10

RAILINGS FOR WELDED GANGWAYS

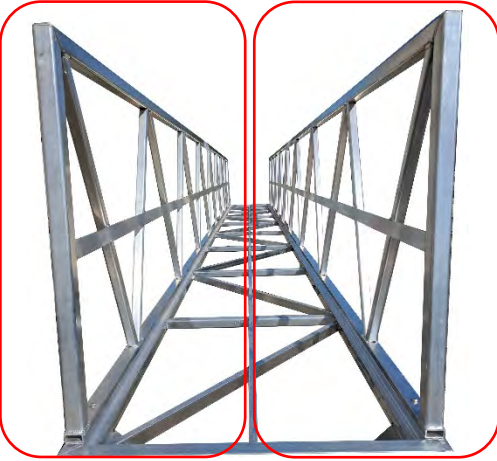

SPECIFICATIONS

Material/Composition: 6005 T-61 Marine-grade aluminum and stainless-steel hardware
Specifications: Height: 106.6cm (42 in)

SKU NUMBERS

RAILING FOR WELDED GANGWAY 42in x 12ft: C05-000020


DESCRIPTION

RAILING FOR WELDED GANGWAY: Consisted of an entirely welded assembly that is **bolted** onto our WELDED GANGWAY FRAMES. Our RAILINGS provide additional strength and stiffness to our gangways while adding a safety factor for the pedestrians. They are usually preferred for rugged residential applications or commercial applications. **Assembly required.**

NOTES :

BOLTED HANDRAILS are optional for 12-foot gangways only. For gangways 16 feet and longer, they are always included in the assembly.

DEPARTURE ANGLES FOR WELDED GANGWAYS

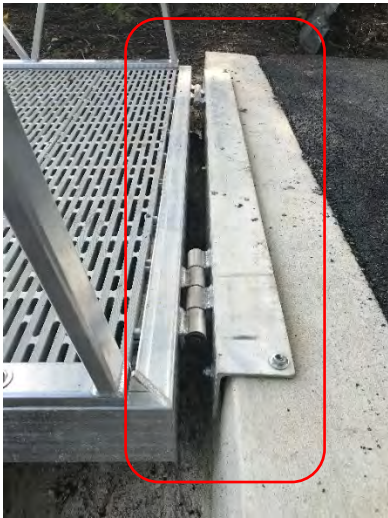

SPECIFICATIONS

Material/Composition: 6005 T-61 Marine grade aluminum, UHMW bushings, and stainless-steel hardware

Needed tools: 9/16" ratchet socket and wrench, and proper tools and hardware to secure the 90 degrees profile onto the existing shoreline structure (seawall, fixed dock, etc.).

SKU NUMBERS


WELDED GANGWAY FRAME DEPARTURE ANGLE 90cm (3') : C05-000003

WELDED GANGWAY FRAME DEPARTURE ANGLE 120cm (4') : C05-000004

AVAILABLE CATEGORIES

WELDED GANGWAY FRAME DEPARTURE ANGLE: Consisted of an entirely welded assembly that is bolted onto our WELDED GANGWAY FRAMES. Our WELDED DEPARTURE ANGLES pivot system allows for smooth movement of the gangway to follow the fluctuations of the water levels. They are usually preferred for rugged residential applications or commercial applications. See above the SKU list for available models. **Assembly required.**

MODULAR HINGED LINK KITS

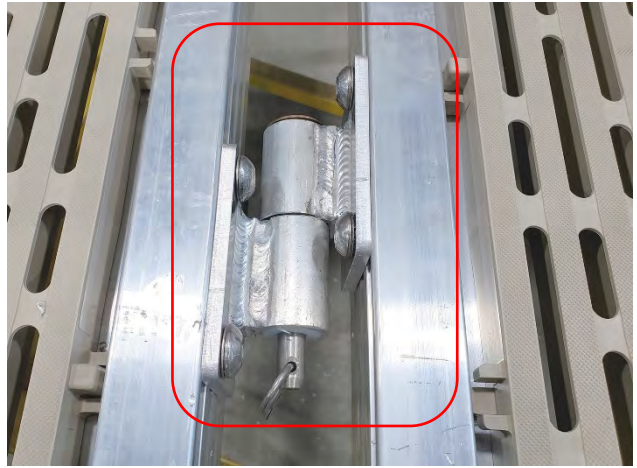

SPECIFICATIONS

Material/Composition: 6005 T-61 Marine grade aluminum, UHMW bushings, and stainless-steel hardware

Needed tools: 5/16" Halen key.

*Hardware is included

SKU NUMBERS

MODULAR HINGED LINK KIT (PAIR): C05-000013

DESCRIPTION

Utilizing the same pivot system as our DEPARTURE ANGLES, the HINGED LINK KITS allow the merging of two (2) gangways, often the first one being fixed; and the second one going down to the floating dock, allowing for a longer transition from shore to dock while keeping the gangways at reasonable dimensions.

They are preferred for light-duty residential applications. **Assembly required.**

ASSEMBLY PROCEDURE - THE MODULAR GANGWAY HINGED LINK KITS

See instruction video:

https://www.youtube.com/watch?v=MPIWii0-r7Y&list=PLmLmDtH9FZgCJBbUSVaBxIWi_7XCzh6H2&index=9&t=45s

SLIDERS FOR WELDED GANGWAYS



SPECIFICATIONS

Material/Composition: HDPE

Needed tools: #3 Robertson head screwdriver (square) and drill bits if the slider is not pre-installed on the gangway frame.

SKU NUMBERS

HD PLASTIC SLIDER 3ft: C05-000016

HD PLASTIC SLIDER 4ft: C05-000017

DESCRIPTION


Simple yet efficient, this accessory prevents the cubes' premature wear underneath the gangway. It is lying on the Candock and is made of soft plastic that will not damage the cubes and remain extremely cheap to replace in the future.

They are preferred for light-duty residential applications.

NOTE

The inclusion of a **SLIDER is mandatory for all gangways** if there are meant to be lying on the Candock at the gangway's dock end portion. A gangway frame should never be installed without a SLIDER. Lastly, depending on the application, geometries, and gangway specification, the SLIDER may also be substituted by a ROLLER.

BOLT-ON ROLLER FOR WELDED GANGWAYS

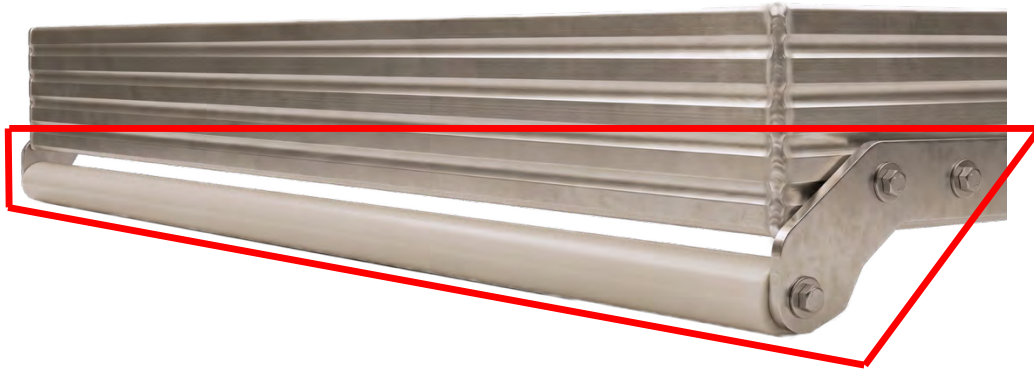

SPECIFICATIONS

Material/Composition: PVC pipe, aluminum tube, and stainless-steel hardware.

Needed tools: 3/4" ratchet socket and wrench (for the roller's pivot point), 9/16" ratchet socket and wrench, and 3/8" drill bit bolt-on model.

*Hardware is included

SKU NUMBERS

ROLLER FOR HD GANGWAY 90cm (3') – BOLT-ON: C05-000036
ROLLER FOR HD GANGWAY 120cm (4') – BOLT-ON: C05-000037

DESCRIPTION

Simple yet efficient, this accessory prevents the cubes' premature wear underneath the gangway. It is lying on the Candock and is made of PVC that will not damage the cubes and remain extremely cheap to replace in the future.

They are preferred for medium-duty residential light-duty commercial applications.



LANDING WHEEL KITS



SPECIFICATIONS

Material/Composition: High-density plastic wheels, stainless steel swivel wheel hubs, and stainless-steel hardware.

Needed tools: ¾" ratchet socket and wrench to install the wheels on the welded aluminum fastening plates (3x).

***Hardware included**

DESCRIPTION

Extremely rugged swivel wheel combination prevents the cubes' premature wear located underneath the gangway where it is lying on the Candock. Allowing for the gangway's optimal movements onto the dock, this method provides the most resilience and durability to the gangway, dock, and their components.



A dock fitted with a gangway that includes the LANDING WHEEL KIT must also be equipped with a GANGWAY RECEPTION PLATE. The "rolling surface" under the reception point must be as flat and uniform as possible.

A gangway fitted with the LANDING WHEEL KIT must also be equipped with an EXTENDED TRANSIT PLATE. The step that is created by the raised profile of the LANDING WHEEL KIT creates a potential trip hazard and should always be covered with an extended version of our transit plates (length of 60cm (24")) instead of our regular transit plate that stretches to 40cm (16")).

They are preferred for heavy-duty commercial applications.



GANGWAY RECEPTION PLATES

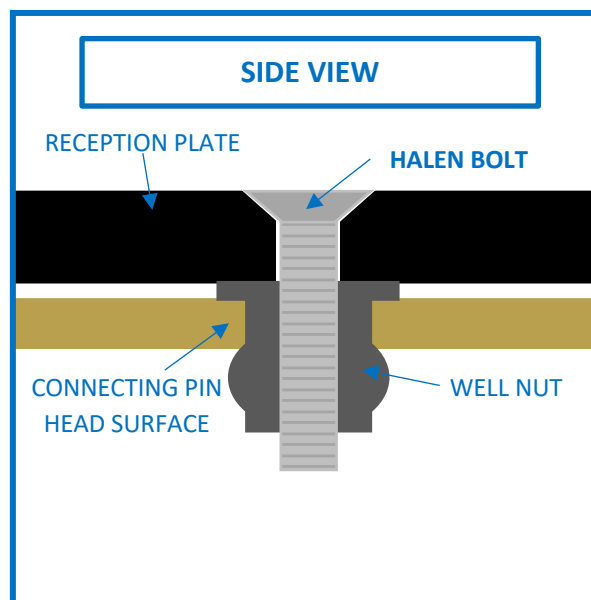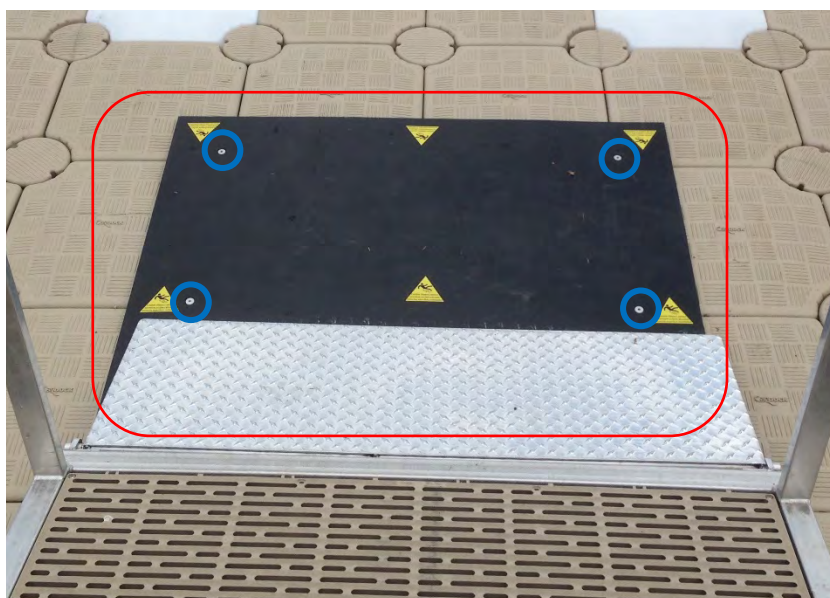

SPECIFICATIONS

Material/Composition: HDPE plate, rubber “well-nuts,” and stainless-steel hardware.

Needed tools*: A Power drill, 3/8” drill bit to drill the (4x) holes on the center of heads of the connecting pins, and a 7/32” Halen key to secure the plate into the rubber “well-nuts”.

*Hardware included

SKU NUMBERS

13mm (1/2”) GANGWAY RECEPTION PLATE 120cm x 150cm (4’ x 5’): C05-000033

DESCRIPTION

The GANGWAY RECEPTION PLATE allows the gangway to rub/slide/roll on a much flatter surface than our cubes' surface. It also prevents premature wear for the dock and gangway components. It is important that the plates' positioning allows for full coverage of the area where the gangway is subjected to travel onto the dock. It is possible to install 2 reception plates side by side to cover a greater area.

For installation, the plate itself acts as a template for drilling the holes in the connecting pins. It is imperative not to secure the plate directly on the cubes, which would compromise their buoyancy. Always position the holes (and well-nuts) onto the [surroundings connecting pins](#).

The GANGWAY RECEPTION PLATE should be highly considered for all WELDED FRAME gangways (12’ and +). Especially if the site is exposed to regular wave action or if the gangway is subjected to heavy pedestrian traffic.

TRANSIT PLATES FOR WELDED GANGWAYS



SPECIFICATIONS

Material/Composition: Aluminum checkered plate and HDPE slider, stainless-steel hardware.

DESCRIPTION

The TRANSIT PLATES are allowing a smoother transition from the gangway to the dock. They are often required for ADA-compliant installations; they are also equipped with a **SLIDER** to ensure the TRANSIT PLATE's safe movements onto the dock.

NOTES

TRANSITION PLATES are always included with our welded gangways.

MODULAR GANGWAYS



SPECIFICATIONS

Material/Composition: 6005 T-61 Marine grade aluminum

Specifications: See our GANGWAY SPECIFICATION CHART

Needed tools: Rubber mallet and, 7/16" ratchet socket and wrench for the modular models

*Included tools MODULAR FRAMES: #3 Robertson drill bit (square), 3/16" drill bit, and all the needed hardware

SKU NUMBERS

MODULAR GANGWAY FRAME 90cm X 120cm (3' X 4'): C05-000008

MODULAR GANGWAY FRAME 90cm X 240cm (3' X 8'): C05-000009

MODULAR GANGWAY FRAME 90cm X 360cm (3' X 12'): C05-000007

MODULAR GANGWAY FRAME 120cm X 120cm (4' X 4'): C05-000011

MODULAR GANGWAY FRAME 120cm X 240cm (4' X 8'): C05-000012

MODULAR GANGWAY FRAME 120cm X 360cm (4' X 12'): C05-000010

DESCRIPTION

MODULAR FRAMES: Consisted of an entirely modular assembly. Our MODULAR FRAMES are made with 3.49cm x 8.57cm (1.375" x 3.375") extrusion profiles. They are usually preferred for light-duty residential applications. The longest model we offer is 3.60m (12') long. As the frames are not assembled when shipped, they offer a significant advantage by generating considerable savings on shipping costs. See below the SKU list for available dimensions. **All components are to be bolted and screwed together after delivery at the customer's place.**

ASSEMBLY PROCEDURE - THE MODULAR GANGWAY FRAMES

See instruction video:

<https://www.youtube.com/watch?v=vH6dv8J0c9g&list=PLmLmDtH9FZgCJBbUSVaBxIW7XcZzh6H2&index=7>

GANGWAY SPECIFICATION CHART

MODULAR FRAMES				
DIMENSIONS (ft)	MAX LOAD LBS.	MAX LOAD KGS	MAX OCCUPANCY (PEOPLE)	
3X4 MODULAR	700	317	4	
3X8 MODULAR	525	238	3	
3X12 MODULAR	350	160	2	
4X4 MODULAR	700	317	4	
4X8 MODULAR	525	238	3	
4X12 MODULAR	350	160	2	

RAILINGS FOR MODULAR GANGWAYS



SPECIFICATIONS

Material/Composition: 6005 T-61 Marine-grade aluminum and stainless-steel hardware

Specifications: Height: 106.6cm (42"); for specifications, see our GANGWAY SPECIFICATION CHART

SKU NUMBERS

MODULAR RAILINGS – 1 SIDE – 240cm (8'): C05-000019

MODULAR RAILINGS – 1 SIDE – 360cm (12'): C05-000018

DESCRIPTION


MODULAR RAILINGS: Consisted of an entirely modular railing assembly, MODULAR RAILINGS provide an added safety factor for the pedestrians. They are usually preferred for light-duty residential applications. As the railings are not assembled when shipped, they offer a significant advantage by generating considerable savings on shipping costs. See below the SKU list for available models. **All components are to be bolted and screwed together after delivery at the customer's place.**

ASSEMBLY PROCEDURE - THE MODULAR GANGWAY RAILINGS

See instruction video:

<https://www.youtube.com/watch?v=3ka9MAqze28&list=PLmLmDth9FZgCJBbUSVaBxIW7XCzh6H2&index=10&t=134s>

DEPARTURE ANGLE FOR MODULAR GANGWAYS

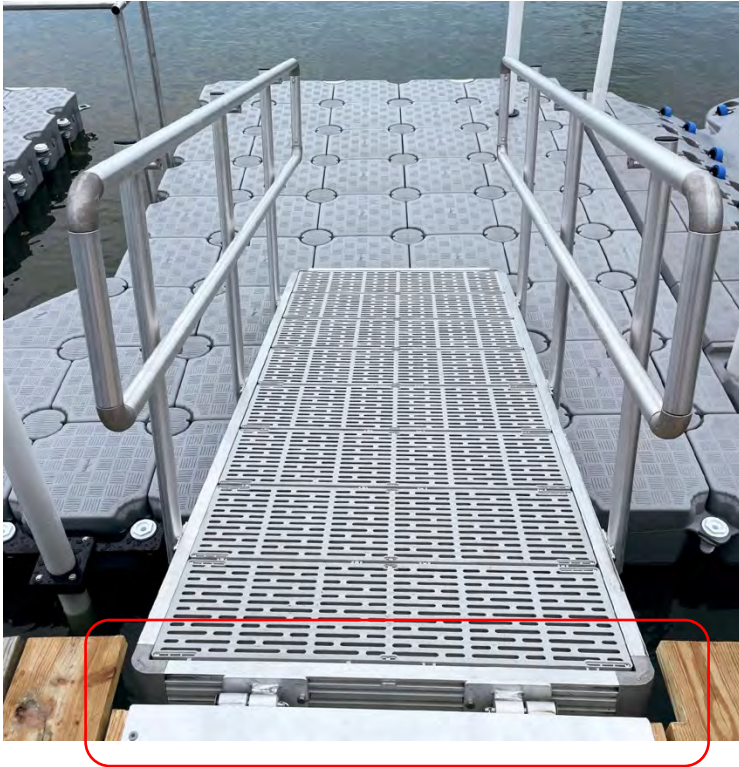

SPECIFICATIONS

Material/Composition: 6005 T-61 Marine grade aluminum, UHMW bushings, and stainless-steel hardware

Needed tools: 9/16" ratchet socket and wrench for the WELDED, 5/16" Halen key for the modular models, and proper tools and hardware to secure the 90 degree profile onto the existing shoreline structure (seawall, fixed dock, etc.).

SKU NUMBERS

MODULAR GANGWAY FRAME DEPARTURE ANGLE 90cm (3'): C05-000005
MODULAR GANGWAY FRAME DEPARTURE ANGLE 120cm (4'): C05-000006

DESCRIPTION


MODULAR DEPARTURE ANGLE: Consisted of an entirely modular departure angle assembly, our MODULAR DEPARTURE ANGLES pivot system allows for smooth upwards and downwards movements of the gangway to follow the fluctuations of the water levels. They are usually preferred for light-duty residential applications. As the departure angles are not assembled when shipped, they offer a significant advantage by generating considerable savings on shipping costs. See below the SKU list for available models. **All components are to be bolted and screwed together after delivery at the customer's place.**

ASSEMBLY PROCEDURE - THE MODULAR GANGWAY DEPARTURE ANGLES

See instruction video:

<https://youtu.be/L7gWsXXnTCQ>

HINGED LINK KITS FOR MODULAR GANGWAYS

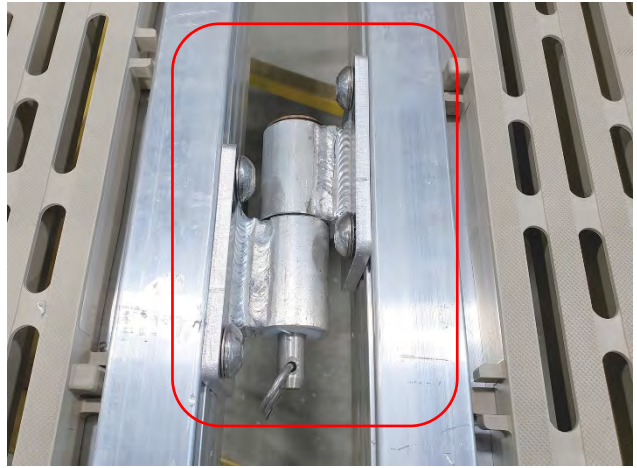

SPECIFICATIONS

Material/Composition: 6005 T-61 Marine grade aluminum, UHMW bushings, and stainless-steel hardware

Needed tools: 5/16" Halen key.

*Hardware is included

SKU NUMBERS

MODULAR HINGED LINK KIT (PAIR): C05-000013

DESCRIPTION

Utilizing the same pivot system as our DEPARTURE ANGLES, the HINGED LINK KITS allow the merging of two (2) gangways, often the first one being fixed; and the second one going down to the floating dock, allowing for a longer transition from shore to dock while keeping the gangways at reasonable dimensions.


They are preferred for light-duty residential applications. **Assembly required.**

ASSEMBLY PROCEDURE - THE MODULAR GANGWAY HINGED LINK KITS

See instruction video:

<https://youtu.be/jGvnlfhEzhc>

SHORE-END PILE BRACKETS FOR MODULAR GANGWAYS

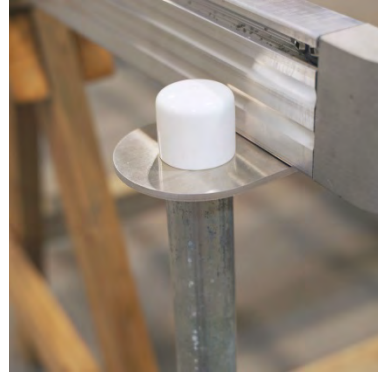

SPECIFICATIONS

Material/Composition: 6005 T-61 Marine-grade aluminum and stainless-steel hardware

Needed tools: 9/16" ratchet socket and wrench, 3/8" drill bit for bolt-on model, and a 5/16" Halen key for the modular model.

*Hardware is included for both the WELDED and MODULAR models

SKU NUMBERS

MODULAR SHORE-END PILE BRACKETS (PAIR): C05-000002

DESCRIPTION

Utilizing a simple pivoting system and small landscaping piles, we can secure our gangways on a sandy/grassy shoreline to ensure a safe passage from the dock. These are not 100% fail-proof (which is intended); the connection point releases in the event of a storm or rough water conditions and prevents potential damage to the gangway and its components.



They are preferred for light-duty residential applications. **Assembly required for the BOLTED version and MODULAR version.**

ASSEMBLY PROCEDURE - THE MODULAR GANGWAY SHORE-END PILE BRACKET

See instruction video:

<https://youtu.be/eKvjDSV6Fsc>

CANDOCK HINGES FOR MODULAR GANGWAYS

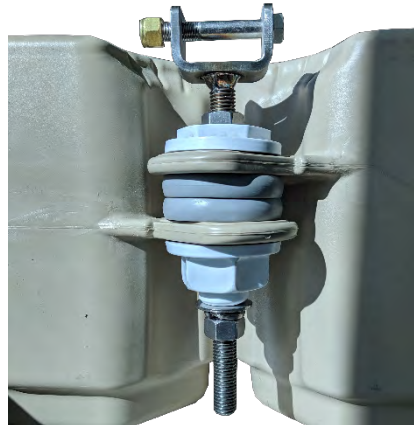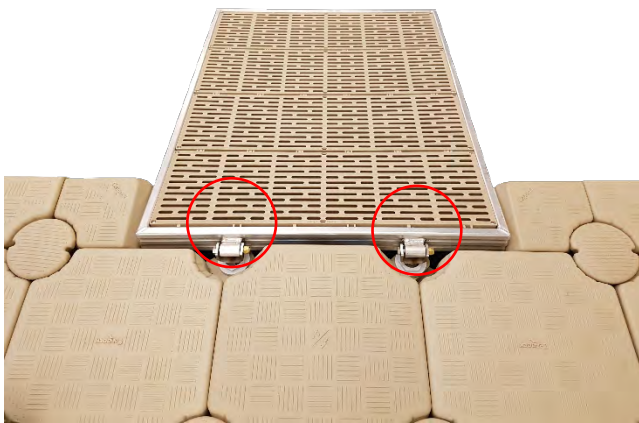

SPECIFICATIONS

Material/Composition: 6005 T-61 Marine grade aluminum, UHMW bushings, stainless-steel and brass hardware (1" 3/16 Nut)

Needed tools: 3/4" ratchet socket and wrench (for the pivot point), and a 5/16" Halen key.

*Hardware is included

**The hardware of this product is made of stainless steel and brass. If you are installing this product in a salty environment, or if there is a risk of corrosion, replace brass components with stainless steel ones. Don't forget to apply anti-seize grease to the nuts.

SKU NUMBERS

MODULAR HINGES (PAIR): C05-000032

DESCRIPTION

Utilizing a simple pivoting system and height-adjustable threaded rods, we can allow a gangway to be firmly secured on the edge of a Candock dock while allowing for smooth upwards and downwards movements of the dock and gangway assembly to follow the fluctuations of the water levels. Usually, we include our SHORE-END PILE BRACKETS at the gangway's shore-end, allowing a second pivoting point on the entire assembly. Such configurations are often ideal on smooth sandy/grassy shorelines.

They are preferred for light-duty residential applications. **Assembly required.**

ASSEMBLY PROCEDURE - THE MODULAR GANGWAY CANDOCK HINGES

See instruction video:

<https://youtu.be/zewVBWLsyZ0>

SLIDERS (FOR WELDED AND MODULAR FRAMES)



SPECIFICATIONS

Material/Composition: HDPE

Needed tools: #3 Robertson head screwdriver (square) and drill bits if the slider is not pre-installed on the gangway frame.

*Modular slider always come with the MODULAR FRAME in the box.

DESCRIPTION

Simple yet efficient, this accessory prevents the cubes' premature wear underneath the gangway. It is lying on the Candock and is made of soft plastic that will not damage the cubes and remain extremely cheap to replace in the future.

They are preferred for light-duty residential applications. **Assembly required for MODULAR version.**

ASSEMBLY PROCEDURE - THE MODULAR GANGWAY SLIDER

See instruction video:

https://www.youtube.com/watch?v=MPIWii0-r7Y&list=PLmLmDtH9FZgCJBbUSVaBxIWj_7XCzh6H2&index=9&t=45s

NOTE

Installing a **SLIDER is mandatory for all modular gangways** that will be placed on Candock cubes. The aluminum frame must never come into direct contact with the cubes.

TRANSIT PLATES FOR MODULAR GANGWAYS



SPECIFICATIONS

Material/Composition: Aluminum checkered plate and HDPE slider, stainless-steel hardware.

Needed tools: 5/32 Halen key (for the set crews), 5/16" Halen key for the modular model.

*Hardware is included modular models

SKU NUMBERS

MODULAR GANGWAY TRANSIT PLATE 90cm x 40cm (3' x 16"): C05-000034

MODULAR GANGWAY TRANSIT PLATE 120cm x 40cm (4' x 24"): C05-000035

DESCRIPTION

The TRANSIT PLATES are allowing a smoother transition from the gangway to the dock. They are often required for ADA-compliant installations; they are also equipped with a SLIDER to ensure the TRANSIT PLATE's safe movements onto the dock.

ASSEMBLY PROCEDURE - THE MODULAR GANGWAY TRANSIT PLATE

See instruction video:

<https://youtu.be/jWM8PN1aoCI>

DECKINGS



SPECIFICATIONS

Material/Composition: Fiberglass Reinforced Plastic

Needed tools: Power drill to drill the gangway frame's holes and impact power drill to secure the gangway frame panels.

*#3 Robertson drill bit, 3/16 drill bit, and screws included with each panel

SKU NUMBERS

BEIGE DECKING 90cm x 30.48cm (3' x 12"): C05-000022

BEIGE DECKING 120cm x 30.48cm (4' x 12"): C05-000024

GREY DECKING 90cm x 30.48cm (3' x 12"): C05-000023

GREY DECKING 120cm x 30.48cm (4' x 12"): C05-000025

DESCRIPTION

Candock's DECKINGS consist of premium quality, non-slip, openwork design plastic panels. Made with top-of-the-line FRP plastic, they are incredibly durable and perfectly adapted for residential and commercial use.

Panels are not pre-assembled by Candock; lay the panels onto the gangway, pre-drill holes at every possible location using each panel as templates. Secure the panels using the provided stainless-steel screws, ideally using an impact drill.

KEY FOR CONNECTING PINS

MANUAL



DRILL



SPECIFICATIONS

Material/Composition: Painted steel

Needed tools for the DRILL model: High torque / Low-speed power drill or brushless & variable speed cordless drill

SKU NUMBERS

MANUAL KEY FOR CONNECTING PIN: C04-000006

DRILL KEY FOR CONNECTING PIN: C04-000007

CAUTION

Always proceed with caution if using a power drill to fasten the CONNECTING PINS; the drill can tend to “kick”. Use Protective footwear. Ideally, use a “double-handle” power drill to prevent wrist/arm injuries. If using a power drill to unscrew pins, always loosen-up the pins manually before using the drill.

KEY FOR NUTS

MANUAL



RATCHET SOCKET



SPECIFICATIONS

Material/Composition: Casted aluminum

Needed tools for the RATCHET SOCKET model: ½” Drive ratchet

SKU NUMBERS

MANUAL KEY FOR NUT: C04-000003

RATCHET SOCKET KEY FOR NUT: C04-000002

PILING DRIVER, PILING BULL AND PILING LEVER


2 7/8" PILING BULL



2 7/8" AND 1 11/16" PILING DRIVER



2 7/8" PILING LEVER

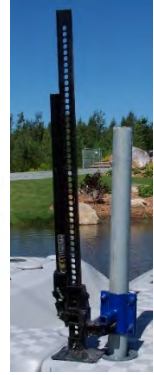

SPECIFICATIONS

Material/Composition: Painted steel

Needed tools for the PILING DRIVERS: 8, 10, or 12lbs sledgehammer

Needed tools for the PILING LEVER: Farm Jack and 3/4 ratchet socket or wrench

SKU NUMBERS

2 7/8" PILING BULL: C04-000001

2 7/8" PILING DRIVER: C04-000010

2 7/8" PILING LEVER: C04-000009

INSTRUCTIONS

While referring to the "Anchoring products Owner's manual" under the chapter "Pilings and G2 post cube method", please observe the following guidelines. Always proceed with caution and safety and use proper footwear, gloves, and workwear.

PILING BULL

- 1-Insert pile into the POST CUBE and let it rest on the bottom of the seabed.
- 2-Insert the ram/bull onto the pile and thrust the pile down into the ground by knocking the ram vigorously on the pile's head.
- 3-Repeat until desired depth of the pile is reached.

PILING DRIVERS

- 1-Position the pile where needed.
- 2-Insert the driver onto the pile, firmly secure it onto the pile with the set screw. Thrust the pile down into the ground by knocking the driver vigorously on the head with a sledgehammer.
- 3-Repeat until desired depth of the pile is reached.

PILING LEVER

- 1-Insert PILE LEVER on the 2 7/8" pile that needs to be removed and fasten the lever manually at approx. 5" from the dock surface.
- 2-Using a 3/4" socket or wrench, securely tight the lever in place at the desired height so the farm jack can be inserted underneath the lever.
- 3-Place the farm jack underneath the lever while making sure that the foot of the farm jack finds support on the POST CUBE's flange.
- 4-Extract the piling by normally operating the farm jack.
- 5-Once the pile is loosened up; you can still use the pile lever as a handle to pull the pile out.

TOOLS FOR CANDOCK MODULAR RAILINGS

DRILLING AND CUTTING JIG



MANUAL KEY FOR SURFACE POST



RATCHET SOCKET FOR SURFACE POST



SPECIFICATIONS

Material/Composition: Aluminum, HDPE, or stainless steel

Needed tools for the DRILLING AND CUTTING JIG: Power drill (plugged or cordless) and miter saw

Needed tools for the RATCHET SOCKET FOR SURFACE POST: High torque / Low-speed power drill or brushless & variable speed cordless drill or ½" drive ratchet

SKU NUMBERS

DRILLING AND CUTTING JIG: C04-000008

MANUAL KEY FOR SURFACE POST: C04-000004

RATCHET SOCKET FOR SURFACE POST: C04-000005

ASSEMBLY AND OPERATIONS PROCEDURES

See instruction video:

https://www.youtube.com/watch?v=jWNzyqzyqzI&list=PLmLmDtH9FZgCJBbUSVaBxIWj_7XCzh6H2&index=12&t=201s